

TECHNICAL REPORT



Performance of high-voltage direct current (HVDC) systems with line-commutated converters – Part 1: Steady-state conditions

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.200; 29.240.99

ISBN 978-2-8322-4412-8

Warning! Make sure that you obtained this publication from an authorized distributor.

REDLINE VERSION



**Performance of high-voltage direct current (HVDC) systems with line-commutated converters –
Part 1: Steady-state conditions**

CONTENTS

FOREWORD.....	7
1 Scope.....	9
2 Normative references	10
3 Types of HVDC systems.....	11
3.1 General.....	11
3.2 HVDC back-to-back system.....	11
3.3 Monopolar HVDC system with earth return HVDC system	13
3.4 Monopolar HVDC system with metallic return HVDC system	15
3.5 Bipolar earth return HVDC system.....	16
3.6 Bipolar HVDC system with metallic return HVDC system	20
3.7 Two 12-pulse groups per pole	22
3.8 Converter transformer arrangements	22
3.9 DC switching considerations.....	27
3.10 Series capacitor compensated HVDC systems.....	29
3.11 LCC/VSC hybrid bipolar system.....	33
4 Environment information.....	34
5 Rated power, current and voltage.....	37
5.1 Rated power.....	37
5.1.1 General	37
5.1.2 Rated power of an HVDC system with transmission line	37
5.1.3 Rated power of an HVDC back-to-back system.....	37
5.1.4 Direction of power flow.....	38
5.2 Rated current.....	38
5.3 Rated voltage.....	38
6 Overload and equipment capability.....	38
6.1 Overload.....	38
6.2 Equipment capability.....	39
6.2.1 General	39
6.2.2 Converter valve capability	39
6.2.3 Capability of oil-cooled transformers and reactors	40
6.2.4 AC harmonic filter and reactive power compensation equipment capability.....	40
6.2.5 Switchgear and buswork capability	40
7 Minimum power transfer and no-load stand-by state.....	40
7.1 General.....	40
7.2 Minimum current.....	40
7.3 Reduced direct voltage operation	41
7.4 No-load stand-by state	41
7.4.1 General	41
7.4.2 Converter transformers – No-load stand-by	41
7.4.3 Converter valves – No-load stand-by	41
7.4.4 AC filters and reactive compensation – No-load stand-by	42
7.4.5 DC reactors and d.c. filters – No-load stand-by.....	42
7.4.6 Auxiliary power system – No-load stand-by.....	42
7.4.7 Control and protection – No-load stand-by.....	42
8 AC system.....	42

8.1	General	42
8.2	AC voltage	42
8.2.1	Rated a.c. voltage	42
8.2.2	Steady-state voltage range	42
8.2.3	Negative sequence voltage	43
8.3	Frequency	43
8.3.1	Rated frequency	43
8.3.2	Steady-state frequency range	43
8.3.3	Short-term frequency variation	44
8.3.4	Frequency variation during emergency	44
8.4	System impedance at fundamental frequency	44
8.5	System impedance at harmonic frequencies	44
8.6	Positive and zero-sequence surge impedance	44
8.7	Other sources of harmonics	44
8.8	Subsynchronous torsional interaction (SSTI)	45
9	Reactive power	45
9.1	General	45
9.2	Conventional HVDC systems	45
9.3	Series capacitor compensated HVDC schemes	47
9.4	Converter reactive power consumption	47
9.5	Reactive power balance with the a.c. system	47
9.6	Reactive power supply	48
9.7	Maximum size of switchable VAR banks	48
10	HVDC transmission line, earth electrode line and earth electrode	48
10.1	General	48
10.2	Overhead line(s)	48
10.2.1	General	48
10.2.2	Electrical parameters	49
10.3	Cable line(s)	49
10.3.1	General	49
10.3.2	Electrical parameters	49
10.4	Earth electrode line	50
10.5	Earth electrode	50
11	Reliability	50
11.1	General	50
11.2	Outage	50
11.2.1	General	50
11.2.2	Scheduled outage	50
11.2.3	Forced outage	51
11.3	Capacity	51
11.3.1	General	51
11.3.2	Maximum continuous capacity P_m	51
11.3.3	Outage capacity P_o	51
11.3.4	Outage derating factor (ODF)	51
11.4	Outage duration terms	51
11.4.1	Actual outage duration (AOD)	51
11.4.2	Equivalent outage duration (EOD)	51
11.4.3	Period hours (PH)	52
11.4.4	Actual outage hours (AOH)	52

11.4.5	Equivalent outage hours (EOH)	52
11.5	Energy unavailability (EU)	52
11.5.1	General	52
11.5.2	Forced energy unavailability (FEU)	53
11.5.3	Scheduled energy unavailability (SEU)	53
11.6	Energy availability (EA)	53
11.7	Maximum permitted number of forced outages	53
11.8	Statistical probability of outages	53
11.8.1	Component faults	53
11.8.2	External faults	53
12	HVDC control	53
12.1	Control objectives	53
12.2	Control structure	54
12.2.1	General	54
12.2.2	Converter unit firing control	54
12.2.3	Pole control	57
12.2.4	HVDC substation control	59
12.2.5	Master control	59
12.3	Control order settings	59
12.4	Current limits	60
12.5	Control circuit redundancy	60
12.6	Measurements	60
13	Telecommunication	61
13.1	Types of telecommunication links	61
13.2	Telephone	61
13.3	Power line carrier (PLC)	61
13.4	Microwave	62
13.5	Radio link	62
13.6	Optical fibre telecommunication	62
13.7	Classification of data to be transmitted	63
13.8	Fast response telecommunication	63
13.9	Reliability	63
14	Auxiliary power supplies	64
14.1	General	64
14.2	Reliability and load classification	64
14.3	AC auxiliary supplies	65
14.4	Batteries and uninterruptible power supplies (UPS)	65
14.5	Emergency supply	66
15	Audible noise	66
15.1	General	66
15.2	Public nuisance	67
15.2.1	General	67
15.2.2	Valves and valve coolers	67
15.2.3	Converter transformers	67
15.2.4	DC reactors	67
15.2.5	AC filter reactors	67
15.3	Noise in working areas	68
16	Harmonic interference – AC	68

16.1	AC side harmonic generation.....	68
16.2	Filters.....	68
16.3	Interference disturbance criteria	72
16.4	Levels for interference.....	73
16.5	Filter performance	74
17	Harmonic interference – DC	74
17.1	DC side interference.....	74
17.1.1	Harmonic currents in HVDC transmission line.....	74
17.1.2	Characteristic and non-characteristic harmonics	74
17.1.3	Groups of harmonics	75
17.1.4	Calculation of harmonic currents	75
17.1.5	Calculation of induced voltages	75
17.1.6	Personnel safety.....	75
17.1.7	DC filters	76
17.2	DC filter performance	76
17.2.1	Requirements for voice communication circuits	76
17.2.2	Levels of interference	77
17.2.3	Safety.....	77
17.3	Specification requirements	77
17.3.1	Economic level of filtering.....	77
17.3.2	General criteria.....	78
17.3.3	Factors to be taken into account for calculations	79
17.3.4	Calculation of currents.....	79
18	Power line carrier interference (PLC).....	81
18.1	General.....	81
18.2	Performance specification.....	81
19	Radio frequency interference.....	82
19.1	General.....	84
19.2	RFI from HVDC systems.....	84
19.2.1	RFI sources.....	84
19.2.2	RFI propagation.....	85
19.2.3	RFI characteristics.....	85
19.3	RFI performance specification	86
19.3.1	RFI risk assessment	86
19.3.2	Specification RFI limit and its verification.....	86
19.3.3	Design aspects	87
20	Power losses	87
20.1	General.....	87
20.2	Main contributing sources.....	88
20.2.1	General	88
20.2.2	AC filters and reactive power compensation	88
20.2.3	Converter bridges	88
20.2.4	Converter transformer	88
20.2.5	DC reactor.....	88
20.2.6	DC filter	88
20.2.7	Auxiliary equipment	89
20.2.8	Other components	89
21	Provision for extensions to the HVDC systems	89

21.1 General	89
21.2 Specification for extensions	89
Annex A (informative) Factors affecting reliability and availability of converter stations	92
Bibliography	99
Figure 1 – Twelve-pulse converter unit	9
Figure 2 – Examples of back-to-back HVDC systems	12
Figure 3 – Monopolar HVDC system with earth return-system	13
Figure 4 – Two 12-pulse units in series	14
Figure 5 – Two 12-pulse units in parallel	15
Figure 6 – Monopolar HVDC system with metallic return-system	16
Figure 7 – Bipolar system	19
Figure 8 – Metallic return operation of the unfaulted pole in a bipolar system	20
Figure 9 – Bipolar HVDC system with metallic return-HVDC system	21
Figure 10 – Bipolar system with two 12-pulse units in series per pole	24
Figure 11 – Bipolar system with two 12-pulse units in parallel per pole	26
Figure 12 – DC switching of line conductors	27
Figure 13 – DC switching of converter poles	28
Figure 14 – DC switching – Overhead line to cable	29
Figure 15 – DC switching – Two-bipolar converters and lines	30
Figure 16 – DC switching – Intermediate	31
Figure 17 – Capacitor commutated converter configurations	32
Figure 18 – Variations of reactive power Q with active power P of an HVDC converter	46
Figure 19 – Control hierarchy	56
Figure 20 – Converter voltage-current characteristic	58
Figure 21 – Examples of a.c. filter connections for a bipole HVDC system	70
Figure 22 – Circuit diagrams for different filter types	71
Figure 23 – RY COM noise meter results averaged – Typical plot of converter noise levels on the d.c. line corrected and normalized to 3 kHz bandwidth $-0 \text{ dBm} = -0,775 \text{ V}$ 1 mW corresponding to $0,775 \text{ V}$ at a pole-to-pole surge impedance of 600Ω	82
Figure 24 – Extension methods for HVDC systems	91
Figure 25 – Recommended measurement procedure with definition of measuring point	87
Figure 26 – LCC/VSC hybrid bipolar system	34
Table 1 – Information supplied for HVDC substation	35
Table 2 – Performance parameters for voice communication circuits: Subscribers and trunk circuits	77

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PERFORMANCE OF HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS WITH LINE-COMMUTATED CONVERTERS –

Part 1: Steady-state conditions

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendments has been prepared for user convenience.

IEC TR 60919-1 edition 3.2 contains the third edition (2010-05) [documents 22F/213/DTR and 22F/218/RVC], its amendment 1 (2013-04) [documents 22F/277/DTR and 22F/286A/RVC] and its amendment 2 (2017-05) [documents 22F/447/DTR and 22F/452/RVDTR].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendments 1 and 2. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 60919-1, which is a technical report, has been prepared by subcommittee 22F: Power electronics for electrical transmission and distribution systems, of IEC technical committee 22: Power electronic systems and equipment.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the changes have been made to the description of multi 12-pulse groups per pole, especially for a large scale ultra high-voltage direct current (UHVDC) converter arrangement;
- b) the different arrangements of d.c. smoothing reactors have been included;
- c) the figures depicting two 12-pulse groups per pole arrangement have been added.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60919 series, published under the general title *Performance of high-voltage direct current (HVDC) systems with line-commutated converters*, can be found on the IEC website

The committee has decided that the contents of the base publication and its amendments will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.


IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

PERFORMANCE OF HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS WITH LINE-COMMUTATED CONVERTERS –

Part 1: Steady-state conditions

1 Scope

This part of the IEC 60919 provides general guidance on the steady-state performance requirements of high-voltage direct current (HVDC) systems. It concerns the steady-state performance of two-terminal HVDC systems utilizing 12-pulse converter units comprised of three-phase bridge (double-way) connections (see Figure 1), but it does not cover multi-terminal HVDC transmission systems. Both terminals are assumed to use thyristor valves as the main semiconductor valves and to have power flow capability in both directions. Diode valves are not considered in this report.

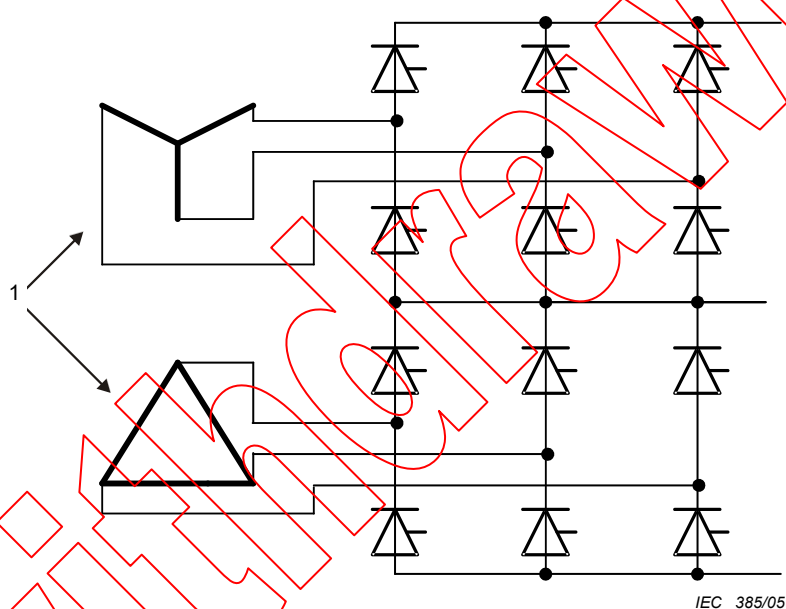

Key

- 1 Transformer valve windings

Figure 1 – Twelve-pulse converter unit

Only line-commutated converters are covered in this report, which includes capacitor commutated converter circuit configurations. General requirements for semiconductor line-commutated converters are given in IEC 60146-1-1, IEC/TR 60146-1-2 and IEC 60146-1-3. Voltage-sourced converters are not considered.

This technical report, which covers steady-state performance, is followed by additional documents on dynamic performance and transient performance. All three aspects should be considered when preparing two-terminal HVDC system specifications.

The difference between system performance specifications and equipment design specifications for individual components of a system should be realized. Equipment specifications and testing requirements are not defined in this report. Also excluded from this report are detailed seismic performance requirements. In addition, because there are many variations between different possible HVDC systems, this report does not consider these in detail; consequently, it should not be used directly as a specification for a particular project, but rather to provide the basis for an appropriate specification tailored to fit actual system requirements.

Frequently, performance specifications are prepared as a single package for the two HVDC substations in a particular system. Alternatively, some parts of the HVDC system can be separately specified and purchased. In such cases, due consideration should be given to co-ordination of each part with the overall HVDC system performance objectives and the interface of each with the system should be clearly defined. Typical of such parts, listed in the appropriate order of relative ease for separate treatment and interface definition, are:

- a) d.c. line, electrode line and earth electrode;
- b) telecommunication system;
- c) converter building, foundations and other civil engineering work;
- d) reactive power supply including a.c. shunt capacitor banks, shunt reactors, synchronous and static reactive power (VAR) compensators;
- e) a.c. switchgear;
- f) d.c. switchgear;
- g) auxiliary systems;
- h) a.c. filters;
- i) d.c. filters;
- j) d.c. reactors;
- k) converter transformers;
- l) surge arresters;
- m) series commutation capacitors;
- n) valves and their ancillaries;
- o) control and protection systems.

NOTE The last four items are the most difficult to separate, and, in fact, separation of these four may be inadvisable.

A complete steady-state performance specification for a HVDC system should consider Clauses 3 to 21 of this report.

Terms and definitions for high-voltage direct current (HVDC) transmission used in this report are given in IEC 60633.

Since the equipment items are usually separately specified and purchased, the HVDC transmission line, earth electrode line and earth electrode (see Clause 10) are included only because of their influence on the HVDC system performance.

For the purpose of this report, an HVDC substation is assumed to consist of one or more converter units installed in a single location together with buildings, reactors, filters, reactive power supply, control, monitoring, protective, measuring and auxiliary equipment. While there is no discussion of a.c. switching substations in this report, a.c. filters and reactive power sources are included, although they may be connected to an a.c. bus separate from the HVDC substation, as discussed in Clause 16.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60146-1-1, *Semiconductor converters – General requirements and line commutated converters – Part 1-1: Specifications of basic requirements*

IEC/TR 60146-1-2, *Semiconductor convertors – General requirements and line commutated convertors – Part 1-2: Application guide*

IEC 60146-1-3, *Semiconductor convertors – General requirements and line commutated convertors – Part 1-3: Transformers and reactors*

IEC 60633, *Terminology for high-voltage direct current (HVDC) transmission*

Withdrawn

FINAL VERSION



Performance of high-voltage direct current (HVDC) systems with line-commutated converters – Part 1: Steady-state conditions

Withhold 2017-05

CONTENTS

FOREWORD.....	7
1 Scope.....	9
2 Normative references	10
3 Types of HVDC systems.....	11
3.1 General.....	11
3.2 HVDC back-to-back system.....	11
3.3 Monopolar HVDC system with earth return	13
3.4 Monopolar HVDC system with metallic return	15
3.5 Bipolar earth return HVDC system.....	16
3.6 Bipolar HVDC system with metallic return.....	19
3.7 Two 12-pulse groups per pole	21
3.8 Converter transformer arrangements	21
3.9 DC switching considerations.....	25
3.10 Series capacitor compensated HVDC systems.....	27
3.11 LCC/VSC hybrid bipolar system.....	31
4 Environment information.....	32
5 Rated power, current and voltage.....	35
5.1 Rated power.....	35
5.1.1 General	35
5.1.2 Rated power of an HVDC system with transmission line	35
5.1.3 Rated power of an HVDC back-to-back system.....	35
5.1.4 Direction of power flow.....	36
5.2 Rated current	36
5.3 Rated voltage.....	36
6 Overload and equipment capability.....	36
6.1 Overload.....	36
6.2 Equipment capability.....	37
6.2.1 General	37
6.2.2 Converter valve capability	37
6.2.3 Capability of oil-cooled transformers and reactors	38
6.2.4 AC harmonic filter and reactive power compensation equipment capability.....	38
6.2.5 Switchgear and buswork capability	38
7 Minimum power transfer and no-load stand-by state	38
7.1 General.....	38
7.2 Minimum current.....	38
7.3 Reduced direct voltage operation	39
7.4 No-load stand-by state	39
7.4.1 General	39
7.4.2 Converter transformers – No-load stand-by	39
7.4.3 Converter valves – No-load stand-by	39
7.4.4 AC filters and reactive compensation – No-load stand-by	40
7.4.5 DC reactors and d.c. filters – No-load stand-by.....	40
7.4.6 Auxiliary power system – No-load stand-by.....	40
7.4.7 Control and protection – No-load stand-by.....	40
8 AC system.....	40

8.1	General	40
8.2	AC voltage	40
8.2.1	Rated a.c. voltage	40
8.2.2	Steady-state voltage range	40
8.2.3	Negative sequence voltage	41
8.3	Frequency	41
8.3.1	Rated frequency	41
8.3.2	Steady-state frequency range	41
8.3.3	Short-term frequency variation	42
8.3.4	Frequency variation during emergency	42
8.4	System impedance at fundamental frequency	42
8.5	System impedance at harmonic frequencies	42
8.6	Positive and zero-sequence surge impedance	42
8.7	Other sources of harmonics	42
8.8	Subsynchronous torsional interaction (SSTI)	43
9	Reactive power	43
9.1	General	43
9.2	Conventional HVDC systems	43
9.3	Series capacitor compensated HVDC schemes	45
9.4	Converter reactive power consumption	45
9.5	Reactive power balance with the a.c. system	45
9.6	Reactive power supply	46
9.7	Maximum size of switchable VAR banks	46
10	HVDC transmission line, earth electrode line and earth electrode	46
10.1	General	46
10.2	Overhead line(s)	46
10.2.1	General	46
10.2.2	Electrical parameters	47
10.3	Cable line(s)	47
10.3.1	General	47
10.3.2	Electrical parameters	47
10.4	Earth electrode line	48
10.5	Earth electrode	48
11	Reliability	48
11.1	General	48
11.2	Outage	48
11.2.1	General	48
11.2.2	Scheduled outage	48
11.2.3	Forced outage	49
11.3	Capacity	49
11.3.1	General	49
11.3.2	Maximum continuous capacity P_m	49
11.3.3	Outage capacity P_o	49
11.3.4	Outage derating factor (ODF)	49
11.4	Outage duration terms	49
11.4.1	Actual outage duration (AOD)	49
11.4.2	Equivalent outage duration (EOD)	49
11.4.3	Period hours (PH)	50
11.4.4	Actual outage hours (AOH)	50

11.4.5	Equivalent outage hours (EOH)	50
11.5	Energy unavailability (EU)	50
11.5.1	General	50
11.5.2	Forced energy unavailability (FEU)	51
11.5.3	Scheduled energy unavailability (SEU)	51
11.6	Energy availability (EA)	51
11.7	Maximum permitted number of forced outages	51
11.8	Statistical probability of outages	51
11.8.1	Component faults	51
11.8.2	External faults	51
12	HVDC control	51
12.1	Control objectives	51
12.2	Control structure	52
12.2.1	General	52
12.2.2	Converter unit firing control	52
12.2.3	Pole control	55
12.2.4	HVDC substation control	57
12.2.5	Master control	57
12.3	Control order settings	57
12.4	Current limits	58
12.5	Control circuit redundancy	58
12.6	Measurements	58
13	Telecommunication	59
13.1	Types of telecommunication links	59
13.2	Telephone	59
13.3	Power line carrier (PLC)	59
13.4	Microwave	60
13.5	Radio link	60
13.6	Optical fibre telecommunication	60
13.7	Classification of data to be transmitted	61
13.8	Fast response telecommunication	61
13.9	Reliability	61
14	Auxiliary power supplies	62
14.1	General	62
14.2	Reliability and load classification	62
14.3	AC auxiliary supplies	63
14.4	Batteries and uninterruptible power supplies (UPS)	63
14.5	Emergency supply	64
15	Audible noise	64
15.1	General	64
15.2	Public nuisance	65
15.2.1	General	65
15.2.2	Valves and valve coolers	65
15.2.3	Converter transformers	65
15.2.4	DC reactors	65
15.2.5	AC filter reactors	65
15.3	Noise in working areas	66
16	Harmonic interference – AC	66

16.1	AC side harmonic generation.....	66
16.2	Filters.....	66
16.3	Interference disturbance criteria	70
16.4	Levels for interference.....	71
16.5	Filter performance	72
17	Harmonic interference – DC	72
17.1	DC side interference.....	72
17.1.1	Harmonic currents in HVDC transmission line.....	72
17.1.2	Characteristic and non-characteristic harmonics	72
17.1.3	Groups of harmonics	73
17.1.4	Calculation of harmonic currents	73
17.1.5	Calculation of induced voltages	73
17.1.6	Personnel safety.....	73
17.1.7	DC filters	74
17.2	DC filter performance	74
17.2.1	Requirements for voice communication circuits	74
17.2.2	Levels of interference	75
17.2.3	Safety.....	75
17.3	Specification requirements	75
17.3.1	Economic level of filtering.....	75
17.3.2	General criteria.....	76
17.3.3	Factors to be taken into account for calculations	77
17.3.4	Calculation of currents.....	77
18	Power line carrier interference (PLC).....	78
18.1	General.....	78
18.2	Performance specification.....	78
19	Radio frequency interference.....	80
19.1	General.....	80
19.2	RFI from HVDC systems.....	80
19.2.1	RFI sources.....	80
19.2.2	RFI propagation.....	80
19.2.3	RFI characteristics.....	81
19.3	RFI performance specification	81
19.3.1	RFI risk assessment	81
19.3.2	Specification RFI limit and its verification.....	82
19.3.3	Design aspects.....	83
20	Power losses	83
20.1	General.....	83
20.2	Main contributing sources.....	84
20.2.1	General	84
20.2.2	AC filters and reactive power compensation	84
20.2.3	Converter bridges	84
20.2.4	Converter transformer	84
20.2.5	DC reactor.....	84
20.2.6	DC filter	84
20.2.7	Auxiliary equipment	85
20.2.8	Other components	85
21	Provision for extensions to the HVDC systems	85

21.1 General	85
21.2 Specification for extensions	85
Annex A (informative) Factors affecting reliability and availability of converter stations	88
Bibliography	95
Figure 1 – Twelve-pulse converter unit	9
Figure 2 – Examples of back-to-back HVDC systems	12
Figure 3 – Monopolar HVDC system with earth return	13
Figure 4 – Two 12-pulse units in series	14
Figure 5 – Two 12-pulse units in parallel	15
Figure 6 – Monopolar HVDC system with metallic return	16
Figure 7 – Bipolar system	18
Figure 8 – Metallic return operation of the unfaulted pole in a bipolar system	19
Figure 9 – Bipolar HVDC system with metallic return	20
Figure 10 – Bipolar system with two 12-pulse units in series per pole	23
Figure 11 – Bipolar system with two 12-pulse units in parallel per pole	24
Figure 12 – DC switching of line conductors	25
Figure 13 – DC switching of converter poles	26
Figure 14 – DC switching – Overhead line to cable	27
Figure 15 – DC switching – Two-bipolar converters and lines	28
Figure 16 – DC switching – Intermediate	29
Figure 17 – Capacitor commutated converter configurations	30
Figure 18 – Variations of reactive power Q with active power P of an HVDC converter	44
Figure 19 – Control hierarchy	54
Figure 20 – Converter voltage-current characteristic	56
Figure 21 – Examples of a.c. filter connections for a bipole HVDC system	68
Figure 22 – Circuit diagrams for different filter types	69
Figure 23 – RY COM noise meter results averaged – Typical plot of converter noise levels on the d.c. line corrected and normalized to 3 kHz bandwidth $-0 \text{ dBm} = 1 \text{ mW}$ corresponding to $0,775 \text{ V}$ at a pole-to-pole surge impedance of 600Ω	79
Figure 24 – Extension methods for HVDC systems	87
Figure 25 – Recommended measurement procedure with definition of measuring point	83
Figure 26 – LCC/VSC hybrid bipolar system	32
Table 1 – Information supplied for HVDC substation	33
Table 2 – Performance parameters for voice communication circuits: Subscribers and trunk circuits	75

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PERFORMANCE OF HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS WITH LINE-COMMUTATED CONVERTERS –

Part 1: Steady-state conditions

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendments has been prepared for user convenience.

IEC TR 60919-1 edition 3.2 contains the third edition (2010-05) [documents 22F/213/DTR and 22F/218/RVC], its amendment 1 (2013-04) [documents 22F/277/DTR and 22F/286A/RVC] and its amendment 2 (2017-05) [documents 22F/447/DTR and 22F/452/RVDTR].

This Final version does not show where the technical content is modified by amendments 1 and 2. A separate Redline version with all changes highlighted is available in this publication.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 60919-1, which is a technical report, has been prepared by subcommittee 22F: Power electronics for electrical transmission and distribution systems, of IEC technical committee 22: Power electronic systems and equipment.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the changes have been made to the description of multi 12-pulse groups per pole, especially for a large scale ultra high-voltage direct current (UHVDC) converter arrangement;
- b) the different arrangements of d.c. smoothing reactors have been included;
- c) the figures depicting two 12-pulse groups per pole arrangement have been added.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 60919 series, published under the general title *Performance of high-voltage direct current (HVDC) systems with line-commutated converters*, can be found on the IEC website

The committee has decided that the contents of the base publication and its amendments will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

PERFORMANCE OF HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS WITH LINE-COMMUTATED CONVERTERS –

Part 1: Steady-state conditions

1 Scope

This part of the IEC 60919 provides general guidance on the steady-state performance requirements of high-voltage direct current (HVDC) systems. It concerns the steady-state performance of two-terminal HVDC systems utilizing 12-pulse converter units comprised of three-phase bridge (double-way) connections (see Figure 1), but it does not cover multi-terminal HVDC transmission systems. Both terminals are assumed to use thyristor valves as the main semiconductor valves and to have power flow capability in both directions. Diode valves are not considered in this report.

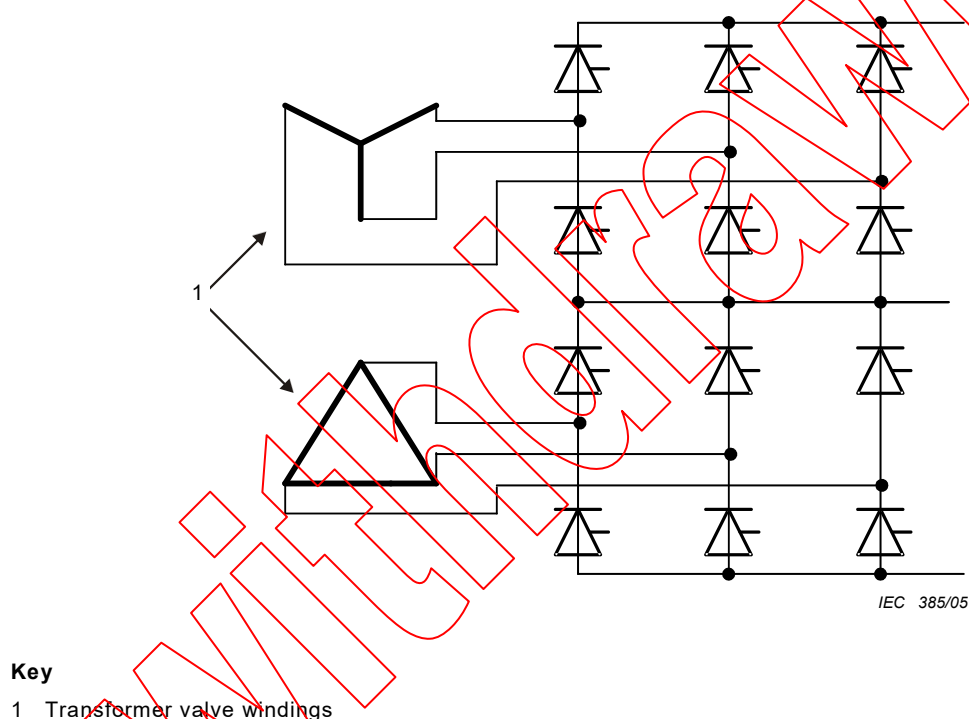


Figure 1 – Twelve-pulse converter unit

Only line-commutated converters are covered in this report, which includes capacitor commutated converter circuit configurations. General requirements for semiconductor line-commutated converters are given in IEC 60146-1-1, IEC/TR 60146-1-2 and IEC 60146-1-3. Voltage-sourced converters are not considered.

This technical report, which covers steady-state performance, is followed by additional documents on dynamic performance and transient performance. All three aspects should be considered when preparing two-terminal HVDC system specifications.

The difference between system performance specifications and equipment design specifications for individual components of a system should be realized. Equipment specifications and testing requirements are not defined in this report. Also excluded from this report are detailed seismic performance requirements. In addition, because there are many variations between different possible HVDC systems, this report does not consider these in detail; consequently, it should not be used directly as a specification for a particular project, but rather to provide the basis for an appropriate specification tailored to fit actual system requirements.

Frequently, performance specifications are prepared as a single package for the two HVDC substations in a particular system. Alternatively, some parts of the HVDC system can be separately specified and purchased. In such cases, due consideration should be given to co-ordination of each part with the overall HVDC system performance objectives and the interface of each with the system should be clearly defined. Typical of such parts, listed in the appropriate order of relative ease for separate treatment and interface definition, are:

- a) d.c. line, electrode line and earth electrode;
- b) telecommunication system;
- c) converter building, foundations and other civil engineering work;
- d) reactive power supply including a.c. shunt capacitor banks, shunt reactors, synchronous and static reactive power (VAR) compensators;
- e) a.c. switchgear;
- f) d.c. switchgear;
- g) auxiliary systems;
- h) a.c. filters;
- i) d.c. filters;
- j) d.c. reactors;
- k) converter transformers;
- l) surge arresters;
- m) series commutation capacitors;
- n) valves and their ancillaries;
- o) control and protection systems.

NOTE The last four items are the most difficult to separate, and, in fact, separation of these four may be inadvisable.

A complete steady-state performance specification for a HVDC system should consider Clauses 3 to 21 of this report.

Terms and definitions for high-voltage direct current (HVDC) transmission used in this report are given in IEC 60633.

Since the equipment items are usually separately specified and purchased, the HVDC transmission line, earth electrode line and earth electrode (see Clause 10) are included only because of their influence on the HVDC system performance.

For the purpose of this report, an HVDC substation is assumed to consist of one or more converter units installed in a single location together with buildings, reactors, filters, reactive power supply, control, monitoring, protective, measuring and auxiliary equipment. While there is no discussion of a.c. switching substations in this report, a.c. filters and reactive power sources are included, although they may be connected to an a.c. bus separate from the HVDC substation, as discussed in Clause 16.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60146-1-1, *Semiconductor converters – General requirements and line commutated converters – Part 1-1: Specifications of basic requirements*

IEC/TR 60146-1-2, *Semiconductor convertors – General requirements and line commutated convertors – Part 1-2: Application guide*

IEC 60146-1-3, *Semiconductor convertors – General requirements and line commutated convertors – Part 1-3: Transformers and reactors*

IEC 60633, *Terminology for high-voltage direct current (HVDC) transmission*

Withdrawn