

INTERNATIONAL
STANDARD

ISO/IEC
13818-1

Ninth edition
2023-12

**Information technology — Generic
coding of moving pictures and
associated audio information —**

**Part 1:
Systems**

*Technologies de l'information — Codage générique des images
animées et du son associé —*

Partie 1: Systèmes



Reference number
ISO/IEC 13818-1:2023(E)

© ISO/IEC 2023



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted.

ISO and IEC draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO and IEC take no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO and IEC had received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents and <https://patents.iec.ch>. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

This document was prepared by ITU-T (as ITU-T H.222.0) and drafted in accordance with its editorial rules, in collaboration with Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

This ninth edition cancels and replaces the eighth edition (ISO/IEC 13818-1:2022), which has been technically revised. It also incorporates the Amendment ISO/IEC 13818-1:2022/Amd 1:2023 and the Technical Corrigendum ISO/IEC 13818-1:2022/Cor 1:2023.

The main changes are as follows:

- updates references to ISO/IEC 14496-1 where clause numbering and field naming has changed;
- clarifies a reference to ISO/IEC 23008-3, where the field 3dAudioSceneInfoID is named differently;
- removes semantic definitions for fields that do not exist in the respective syntax table (Table 2-123);
- improves the semantic definition for HDR_WCG_idc equal to '0';
- corrects a mismatch in field size between syntax table and semantic definition of SubstreamOffset[k][j][i];
- corrects a misleading semantic definition of the media_description_flag for the Media_service_kind descriptor.

ISO/IEC 13818-1:2023(E)

A list of all parts in the ISO/IEC 13818 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

CONTENTS

	Page
SECTION 1 – GENERAL.....	1
1.1 Scope.....	1
1.2 Normative references	1
SECTION 2 – TECHNICAL ELEMENTS	4
2.1 Definitions.....	4
2.2 Symbols and abbreviations	12
2.3 Method of describing bit stream syntax	14
2.4 Transport stream bitstream requirements.....	15
2.5 Program stream bitstream requirements.....	63
2.6 Program and program element descriptors.....	77
2.7 Restrictions on the multiplexed stream semantics	166
2.8 Compatibility with ISO/IEC 11172	170
2.9 Registration of copyright identifiers	170
2.10 Registration of private data format.....	171
2.11 Carriage of ISO/IEC 14496 data.....	171
2.12 Carriage of metadata	183
2.13 Carriage of ISO 15938 data.....	192
2.14 Carriage of Rec. ITU-T H.264 ISO/IEC 14496-10 video	192
2.15 Carriage of ISO/IEC 14496-17 text streams	208
2.16 Carriage of auxiliary video streams	210
2.17 Carriage of HEVC.....	210
2.18 Carriage of green access units.....	224
2.19 Carriage of ISO/IEC 23008-3 MPEG-H 3D audio data.....	226
2.20 Carriage of Quality Access Units in MPEG-2 sections.....	228
2.21 Carriage of sample variants.....	229
2.22 Carriage of Media Orchestration Access Units.....	230
2.23 Carriage of VVC	230
2.24 Carriage of EVC	235
2.25 Carriage of LCEVC	238
Annex A CRC decoder model	240
A.1 CRC decoder model.....	240
Annex B Digital storage medium command and control (DSM-CC).....	241
B.1 Introduction.....	241
B.2 General elements.....	242
B.3 Technical elements.....	244
Annex C Program-specific information.....	250
C.1 Explanation of program-specific information in transport streams.....	250
C.2 Introduction.....	250
C.3 Functional mechanism	250
C.4 The mapping of sections into transport stream packets.....	251
C.5 Repetition rates and random access	251
C.6 What is a program?	252
C.7 Allocation of program_number	252
C.8 Usage of PSI in a typical system.....	252
C.9 The relationships of PSI structures	253
C.10 Bandwidth utilization and signal acquisition time	255
Annex D Systems timing model and application implications of this Recommendation International Standard	258
D.1 Introduction.....	258
Annex E Data transmission applications	267
E.1 General considerations.....	267
E.2 Suggestion.....	267
Annex F Graphics of syntax for this Recommendation International Standard.....	268

	<i>Page</i>
F.1 Introduction.....	268
Annex G General information	272
G.1 General information	272
Annex H Private data.....	273
H.1 Private data.....	273
Annex I Systems conformance and real-time interface	274
I.1 Systems conformance and real-time interface.....	274
Annex J Interfacing jitter-inducing networks to MPEG-2 decoders.....	275
J.1 Introduction.....	275
J.2 Network compliance models.....	275
J.3 Network specification for jitter smoothing	276
J.4 Example decoder implementations	277
Annex K Splicing transport streams	278
K.1 Introduction.....	278
K.2 The different types of splicing point	278
K.3 Decoder behaviour on splices	279
Annex L Registration procedure (see 2.9).....	281
L.1 Procedure for the request of a Registered Identifier (RID)	281
L.2 Responsibilities of the Registration Authority	281
L.3 Responsibilities of parties requesting an RID	281
L.4 Appeal procedure for denied applications.....	281
Annex M Registration application form (see 2.9)	283
M.1 Contact information of organization requesting a Registered Identifier (RID).....	283
M.2 Statement of an intention to apply the assigned RID	283
M.3 Date of intended implementation of the RID	283
M.4 Authorized representative	283
M.5 For official use only of the Registration Authority	283
Annex N Registration Authority Diagram of administration structure (see 2.9).....	284
Annex O Registration procedure (see 2.10).....	285
O.1 Procedure for the request of an RID.....	285
O.2 Responsibilities of the Registration Authority	285
O.3 Contact information for the Registration Authority	285
O.4 Responsibilities of parties requesting an RID	285
O.5 Appeal procedure for denied applications.....	285
Annex P Registration application form	287
P.1 Contact information of organization requesting an RID	287
P.2 Request for a specific RID	287
P.3 Short description of RID that is in use and date system that was implemented	287
P.4 Statement of an intention to apply the assigned RID	287
P.5 Date of intended implementation of the RID	287
P.6 Authorized representative	287
P.7 For official use of the Registration Authority	287
Annex Q T-STD and P-STD buffer models for ISO/IEC 13818-7 ADTS	288
Q.1 Introduction.....	288
Q.2 Leak rate from transport buffer	288
Q.3 Buffer size.....	288
Q.4 Conclusion	289
Annex R Carriage of ISO/IEC 14496 scenes in Rec. ITU-T H.222.0 ISO/IEC 13818-1	291
R.1 Content access procedure for ISO/IEC 14496 program components within a program stream	291
R.2 Content access procedure for ISO/IEC 14496 program components within a transport stream	292
Annex S Carriage of JPEG 2000 part 1 video over MPEG-2 transport streams.....	296
S.1 Introduction.....	296

	<i>Page</i>
S.2 J2K video access unit, J2K video elementary stream, J2K video sequence and J2K still picture.....	296
S.3 Optional J2K block mode for high resolution support.....	296
S.4 Optional J2K stripe mode for Ultra-Low Latency	297
S.5 Elementary stream header (elsm) and mapping to PES packets	297
S.6 J2K transport constraints.....	300
S.7 Interpretation of flags in adaptation and PES headers for J2K video elementary streams	301
S.8 T-STD extension for J2K video elementary streams	301
Annex T MIME type for MPEG-2 transport streams	304
T.1 Introduction.....	304
T.2 MIME type and subtype.....	304
T.3 Security considerations	305
T.4 Parameters.....	305
Annex U Carriage of timeline and external media information over MPEG-2 transport streams	307
U.1 Introduction.....	307
U.2 TEMI access unit and TEMI elementary stream.....	308
U.3 AF descriptors.....	309
Annex V Transport of HEVC tiles	318
V.1 Introduction.....	318
V.2 HEVC tile substream identification example	319
V.3 Subregion layout example.....	319
Annex W Carriage of JPEG XS part 1 video over MPEG-2 Transport Streams	321
W.1 Introduction.....	321
W.2 JPEG XS video access unit, JPEG XS video elementary stream, JPEG XS video sequence and JPEG XS still picture	321
W.3 Elementary stream header (jxes) and mapping to PES packets.....	321
W.4 JPEG XS transport constraints	322
W.5 Interpretation of flags in adaptation field and PES packet for JPEG XS video elementary streams.....	323
W.6 T-STD extension for JPEG XS video elementary streams.....	323
Bibliography	326

List of Tables

	<i>Page</i>
Table 2-1 – Transport stream.....	26
Table 2-2 – Transport packet of this Recommendation International Standard.....	26
Table 2-3 – PID table	27
Table 2-4 – Scrambling control values.....	27
Table 2-5 – Adaptation field control values	28
Table 2-6 – Transport stream adaptation field.....	28
Table 2-7 – Splice parameters Table 1 Simple Profile Main Level, Main Profile Main Level, SNR Profile Main Level (both layers), Spatial Profile High-1440 Level (base layer), High Profile Main Level (middle + base layers), Multi-view Profile Main Level (base layer) Video	35
Table 2-8 – Splice parameters Table 2 Main Profile Low Level, SNR Profile Low Level (both layers), High Profile Main Level (base layer), Multi-view Profile Low Level (base layer) Video.....	35
Table 2-9 – Splice parameters Table 3 Main Profile High-1440 Level, Spatial Profile High-1440 Level (all layers), High Profile High-1440 Level (middle + base layers), Multi-view Profile High-1440 Level (base layer) Video	36
Table 2-10 – Splice parameters Table 4 Main Profile High Level, High Profile High-1440 Level (all layers), High Profile High Level (middle + base layers), Multi-view Profile High Level (base layer) Video.....	36
Table 2-11 – Splice parameters Table 5 SNR Profile Low Level (base layer) Video	36
Table 2-12 – Splice parameters Table 6 SNR Profile Main Level (base layer) Video	36
Table 2-13 – Splice parameters Table 7 Spatial Profile High-1440 Level (middle + base layers) Video	37
Table 2-14 – Splice parameters Table 8 High Profile Main Level (all layers), High Profile High-1440 Level (base layer) Video	37
Table 2-15 – Splice parameters Table 9 High Profile High Level (base layer), Multi-view Profile Main Level (both layers) Video	37
Table 2-16 – Splice parameters Table 10 High Profile High Level (all layers), Multi-view Profile High-1440 Level (both layers) Video	38
Table 2-17 – Splice parameters Table 11 4:2:2 Profile Main Level Video	38
Table 2-18 – Splice parameters Table 12 Multi-view Profile Low Level (both layers) Video.....	38
Table 2-19 – Splice parameters Table 13 Multi-view Profile High Level (both layers) Video	38
Table 2-20 – Splice parameters Table 14 4:2:2 Profile High Level Video.....	39
Table 2-21 – PES packet	39
Table 2-22 – Stream_id assignments	42
Table 2-23 – PES scrambling control values.....	43
Table 2-24 – Trick mode control values.....	48
Table 2-25 – Field_id field control values.....	49
Table 2-26 – Coefficient selection values.....	49
Table 2-27 – Stream_id_extension assignments.....	51
Table 2-28 – Program-specific information.....	52
Table 2-29 – Program-specific information pointer	54
Table 2-30 – Program association section	54
Table 2-31 – table_id assignment values	55
Table 2-32 – Conditional access section.....	56
Table 2-33 – Transport stream program map section	57
Table 2-34 – Stream type assignments	58
Table 2-35 – Private section	61
Table 2-36 – The transport stream description table	62
Table 2-37 – Program stream	68
Table 2-38 – Program stream pack	68
Table 2-39 – Program stream pack header	69
Table 2-40 – Program stream system header.....	70
Table 2-41 – Program stream map.....	73
Table 2-42 – Program stream directory packet.....	75
Table 2-43 – Intra_coded indicator.....	76
Table 2-44 – Coding_parameters indicator	77
Table 2-45 – Program and program element descriptors	77
Table 2-46 – Video stream descriptor	79

	<i>Page</i>
Table 2-47 – Frame rate code	79
Table 2-48 – Audio stream descriptor	80
Table 2-49 – Hierarchy descriptor.....	80
Table 2-50 – Hierarchy_type field values.....	82
Table 2-51 – Registration descriptor	82
Table 2-52 – Data stream alignment descriptor.....	83
Table 2-53 – Video stream alignment values	83
Table 2-54 – AVC video stream alignment values	84
Table 2-55 – HEVC video stream alignment values	84
Table 2-56 – Audio stream alignment values	84
Table 2-57 – VVC video stream alignment values.....	85
Table 2-58 – EVC video stream alignment values	85
Table 2-59 – Target background grid descriptor	86
Table 2-60 – Video window descriptor	86
Table 2-61 – Conditional access descriptor	87
Table 2-62 – ISO 639 language descriptor	87
Table 2-63 – Audio type values.....	88
Table 2-64 – System clock descriptor	89
Table 2-65 – Multiplex buffer utilization descriptor	89
Table 2-66 – Copyright descriptor.....	90
Table 2-67 – Maximum bitrate descriptor	90
Table 2-68 – Private data indicator descriptor.....	91
Table 2-69 – Smoothing buffer descriptor.....	91
Table 2-70 – STD descriptor	92
Table 2-71 – IBP descriptor.....	92
Table 2-72 – MPEG-4 video descriptor.....	93
Table 2-73 – MPEG-4 audio descriptor.....	93
Table 2-75 – IOD descriptor.....	96
Table 2-76 – SL descriptor	96
Table 2-77 – FMC descriptor	97
Table 2-78 – External_ES_ID descriptor.....	97
Table 2-79 – Muxcode descriptor.....	98
Table 2-80 – M4MuxBufferSize descriptor.....	98
Table 2-81 – MultiplexBuffer descriptor.....	99
Table 2-82 – M4MuxTiming descriptor	99
Table 2-83 – Content labelling descriptor	100
Table 2-84 – Metadata_application_format.....	100
Table 2-85 – Content_time_base_indicator values.....	101
Table 2-86 – Metadata pointer descriptor.....	102
Table 2-87 – Metadata format values	102
Table 2-88 – MPEG_carriage_flags	103
Table 2-89 – Metadata descriptor	104
Table 2-90 – decoder_config_flags	105
Table 2-91 – Metadata STD descriptor.....	106
Table 2-92 – AVC video descriptor.....	106
Table 2-93 – AVC timing and HRD descriptor	108
Table 2-94 – MPEG-2 AAC_audio_descriptor	109
Table 2-95 – MPEG-2_AAC_additional_information field values	110
Table 2-96 – MPEG-4 text descriptor	110
Table 2-97 – MPEG-4 audio extension descriptor	110
Table 2-98 – Auxiliary video stream descriptor	111
Table 2-99 – SVC extension descriptor	112
Table 2-100 – MVC extension descriptor.....	113
Table 2-101 – J2K video descriptor.....	114

	<i>Page</i>
Table 2-102 – Example frame rates based on DEN_frame_rate and NUM_frame_rate values	116
Table 2-103 – MVC operation point descriptor.....	118
Table 2-104 – MPEG2_stereoscopic_video_format_descriptor syntax	119
Table 2-105 – Stereoscopic_program_info_descriptor syntax	119
Table 2-106 – Stereoscopic_service_type values	120
Table 2-107 – Stereoscopic_video_info_descriptor syntax.....	120
Table 2-108 – Upsampling factor values.....	121
Table 2-109 – Extension descriptor.....	121
Table 2-110 – Extension descriptor tag values.....	124
Table 2-111 – Transport_profile_descriptor syntax	125
Table 2-112 – Transport_profile values	125
Table 2-113 – HEVC video descriptor	126
Table 2-114 – Semantics of HDR_WGC_idc.....	128
Table 2-115 – HEVC timing and HRD descriptor.....	128
Table 2-116 – Adaptation field extension descriptor.....	129
Table 2-117 – HEVC operation point descriptor.....	130
Table 2-118 – HEVC hierarchy extension descriptor.....	132
Table 2-119 – Semantics of extension dimension bits.....	132
Table 2-120 – Green extension descriptor	133
Table 2-121 – MPEG-H 3D audio descriptor.....	134
Table 2-122 – MPEG-H 3D audio config descriptor.....	134
Table 2-123 – MPEG-H 3D audio scene descriptor	135
Table 2-124 – MPEG-H 3D audio text label descriptor	138
Table 2-125 – MPEG-H 3D audio multi-stream descriptor.....	140
Table 2-126 – MPEG-H 3D audio DRC and Loudness descriptor()	141
Table 2-127 – MPEG-H 3D audio command descriptor	143
Table 2-128 – Quality extension descriptor.....	144
Table 2-129 – Virtual segmentation descriptor	145
Table 2-130 – HEVC tile substream descriptor.....	146
Table 2-131 — HEVC subregion descriptor	147
Table 2-132 – JPEG XS video descriptor.....	149
Table 2-133 – VVC video descriptor.....	151
Table 2-134 – Semantics of HDR_WGC_idc.....	152
Table 2-135 – SDR widely used video property combinations	153
Table 2-136 – WCG widely used video property combinations.....	153
Table 2-137 – HDR/WCG widely used video property combinations	153
Table 2-138 – No Indication.....	154
Table 2-139 – VVC timing and HRD descriptor	154
Table 2-140 – EVC video descriptor	156
Table 2-141 – EVC timing and HRD descriptor	157
Table 2-142 – LCEVC video descriptor	158
Table 2-143 – LCEVC linkage descriptor	159
Table 2-144 – Media service kind descriptor	160
Table 2-145 – media_description_flag	160
Table 2-146 – Media type indicator.....	160
Table 2-147 – ID_length_code	161
Table 2-148 – ID_type.....	161
Table 2-149 – configuration type values	161
Table 2-150 – lang_len_indicator.....	162
Table 2-151 – Media service type values	162
Table 2-152 – Carriage of individual ISO/IEC 14496 streams in Rec. ITU-T H.222.0 ISO/IEC 13818-1	172
Table 2-153 – Section syntax for transport of ISO/IEC 14496 stream	177
Table 2-154 – ISO/IEC defined options for carriage of an ISO/IEC 14496 scene and associated streams in Rec. ITU-T H.222.0 ISO/IEC 13818-1	180
Table 2-155 – Metadata Access Unit Wrapper.....	187

	<i>Page</i>
Table 2-156 – Metadata AU cell	187
Table 2-157 – Cell fragment indication.....	187
Table 2-158 – Section syntax for transport of metadata	188
Table 2-159 – Section fragment indication.....	189
Table 2-160 – View and dependency representation delimiter NAL unit	198
Table 2-161 – Implied hierarchy_layer_index if no hierarchy descriptors are used.....	218
Table 2-162 – Green access unit section syntax	225
Table 2-163 – Green access unit.....	225
Table 2-164 – Quality Access Unit	228
Table B.1 – DSM-CC syntax.....	245
Table B.2 – Command_id assigned values.....	245
Table B.3 – DSM-CC control.....	246
Table B.4 – Select mode assigned values.....	247
Table B.5 – DSM-CC Acknowledgement	248
Table B.6 – Time code	249
Table C.1 – Composite_descriptor	255
Table C.2 – Sub-descriptor	255
Table C.3 – Program association table bandwidth usage (bit/s) Number of programs per transport stream	256
Table C.4 – Program map table bandwidth usage (bit/s) Number of programs per transport stream.....	256
Table D.1 – Re-multiplexing strategy	263
Table E.1 – PES packet header example	267
Table S.1 – J2K Access unit elementary stream header	298
Table S.2 – Operating levels and maximum buffer size for JPEG 2000 broadcast profiles (from Table A.49 in Rec. ITU-T T.800 (2015) ISO/IEC 15444-1:2016)	303
Table T.1 – 'codecs' parameter values for some specific stream_type values	305
Table U.1 – Variable field length notation example.....	307
Table U.1bis – Table U.1 in equivalent full notation	308
Table U.2 – TEMI access unit	308
Table U.3 – AF descriptor tags.....	309
Table U.4 – TEMI location descriptor.....	310
Table U.5 – TEMI URL scheme types	310
Table U.6 – TEMI service types.....	311
Table U.7 – TEMI base URL descriptor.....	311
Table U.8 – TEMI timeline descriptor	312
Table U.9 – TEMI MPEG-H_3dAudio_extStreamID descriptor	314
Table U.10 – Boundary descriptor.....	315
Table U.11 – sequence_number_length_code interpretation.....	315
Table U.12 – Labelling Descriptor	316
Table U.13 – label_length_code interpretation.....	316
Table U.14 – label_type values	317
Table U.15 – HEVC tile substream af_descriptor	317
Table W.1 – JPEG XS Access unit elementary stream header (jxes header)	321

List of Figures

	<i>Page</i>
Figure Intro. 1 – Simplified overview of the scope of this Recommendation International Standard	xiv
Figure Intro. 2 – Prototypical transport demultiplexing and decoding example.....	xvi
Figure Intro. 3 – Prototypical transport multiplexing example.....	xvi
Figure Intro. 4 – Prototypical transport stream to program stream conversion	xvi
Figure Intro. 5 – Prototypical decoder for program streams.....	xvii
Figure 2-1 – Transport stream system target decoder notation.....	16
Figure 2-2 – Program stream system target decoder notation	63
Figure 2-3 – Target background grid descriptor display area	85
Figure 2-4 – Media Service Kind Descriptor semantics at program level	165
Figure 2-5 – Media Program Kind Descriptor semantics at elementary stream level	165
Figure 2-6 – T-STD model extensions for individual ISO/IEC 14496 elementary streams	172
Figure 2-7 – T-STD model for ISO/IEC 14496 content	178
Figure 2-8 – P-STD model for ISO/IEC 14496 Systems stream	181
Figure 2-9 – Timing model for delivery of content and metadata	184
Figure 2-10 – Delivery of metadata in PES packets	185
Figure 2-11 – Metadata signalling and referencing	191
Figure 2-12 – Metadata decoding in the STD.....	191
Figure 2-13 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 video.....	195
Figure 2-14 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 video	197
Figure 2-15 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with scalable video sub-bitstreams.....	198
Figure 2-16 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with scalable video sub-bitstreams.....	201
Figure 2-17 – T-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with MVC video sub-bitstreams.....	203
Figure 2-18 – P-STD model extensions for Rec. ITU-T H.264 ISO/IEC 14496-10 Video with MVC video sub-bitstreams.....	207
Figure 2-19 – T-STD model extensions for ISO/IEC 14496-17 text streams.....	209
Figure 2-20 – T-STD model extensions for single layer HEVC.....	212
Figure 2-21 – T-STD model extensions for layered transport of HEVC temporal video subsets.....	214
Figure 2-22 – T-STD model extensions for bitstream-partition-specific CPB operation	216
Figure 2-23 – T-STD model extensions for transport of HEVC tiles through individual ESs	220
Figure 2-24 – T-STD model extensions for transport of HEVC tiles in a common ES using AF descriptors	222
Figure 2-25 – T-STD model extension for transport of HEVC tiles in a common ES ignoring AF descriptors	224
Figure 2-26 – T-STD model extension for green access units.....	226
Figure 2-27 – Transport stream system target decoder for multiple audio elementary streams	228
Figure 2-28 – Quality Access Unit decoder processing model.....	229
Figure 2-29 – T-STD model extensions for single layer VVC	231
Figure 2-30 – T-STD model extensions for layered transport of VVC temporal video subsets	233
Figure 2-31 – T-STD model extensions for single layer EVC	236
Figure A.1 – 32-bit CRC decoder model.....	240
Figure B.1 – Configuration of DSM-CC application.....	243
Figure B.2 – BSM-CC bitstream decoded as a stand-alone bitstream.....	243
Figure B.3 – DSM-CC bitstream decoded as part of the system bitstream	244
Figure C.1 – Program and network mapping relationships	253
Figure D.1 – Constant delay model	258
Figure D.2 – STC recovery using PLL.....	262
Figure F.1 – Transport stream syntax diagram	268
Figure F.2 – PES packet syntax diagram	269
Figure F.3 – Program association section diagram	269
Figure F.4 – Conditional access section diagram	269
Figure F.5 – TS program map section diagram	270
Figure F.6 – Private section diagram	270
Figure F.7 – Program stream diagram	271

	<i>Page</i>
Figure F.8 – Program stream map diagram	271
Figure J.1 – Sending system streams over a jitter-inducing network	276
Figure J.2 – Jitter-smoothing using network-layer timestamps	276
Figure J.3 – Integrated dejittering and MPEG-2 decoding	277
Figure R.1 – Example of ISO/IEC 14496 content in a program stream	292
Figure R.2 – Example of ISO/IEC 14496 content in a transport stream.....	293
Figure R.3 – Usage of MPEG-4 in a transport stream with BIFS scene referring to native PES	294
Figure R.4 – Usage of MPEG-4 in a transport stream with an ODUpdate_descriptor carrying an image ObjectDescriptor in the PMT	295
Figure S.1 – Structure and order of JPEG 2000 access units.....	300
Figure S.2 – T-STD model extensions for J2K Video.....	301
Figure U.1 – Stream partitioning into 2 and 5 second segments	315
Figure V.1 – Illustration of HEVC tiled encoding of panoramic content beyond UHD.....	318
Figure V.2 – Example of HEVC tile substream identification	319
Figure V.3 – Example of subregion layout for a 3 x 3 RoI	319
Figure W.1 – Structure and order of JPEG XS access units	322
Figure W.2 – T-STD model extensions for JPEG XS Video.....	324

Introduction

The systems part of this Recommendation | International Standard addresses the combining of one or more elementary streams of video and audio, as well as other data, into single or multiple streams which are suitable for storage or transmission. Systems coding follows the syntactical and semantic rules imposed by this Specification and provides information to enable synchronized decoding of decoder buffers over a wide range of retrieval or receipt conditions.

System coding shall be specified in two forms: the transport stream and the program stream. Each is optimized for a different set of applications. Both the transport stream and program stream defined in this Recommendation | International Standard provide coding syntax which is necessary and sufficient to synchronize the decoding and presentation of the video and audio information, while ensuring that data buffers in the decoders do not overflow or underflow. Information is coded in the syntax using time stamps concerning the decoding and presentation of coded audio and visual data and time stamps concerning the delivery of the data stream itself. Both stream definitions are packet-oriented multiplexes.

The basic multiplexing approach for single video and audio elementary streams is illustrated in Figure Intro. 1. The video and audio data is encoded as described in Rec. ITU-T H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3. The resulting compressed elementary streams are packetized to produce PES packets. Information needed to use PES packets independently of either transport streams or program streams may be added when PES packets are formed. This information is not needed and need not be added when PES packets are further combined with system level information to form transport streams or program streams. This systems standard covers those processes to the right of the vertical dashed line.

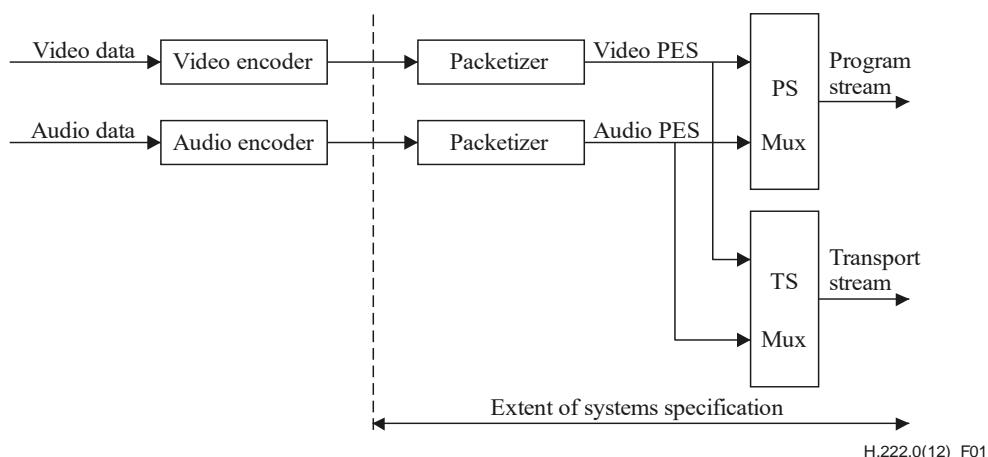


Figure Intro. 1 – Simplified overview of the scope of this Recommendation | International Standard

The program stream is analogous and similar to the ISO/IEC 11172 systems layer. It results from combining one or more streams of PES packets, which have a common time base, into a single stream.

For applications that require the elementary streams that comprise a single program to be in separate streams that are not multiplexed, the elementary streams can also be encoded as separate program streams, one per elementary stream, with a common time base. In this case the values encoded in the SCR fields of the various streams shall be consistent.

Like the single program stream, all elementary streams can be decoded with synchronization.

The program stream is designed for use in relatively error-free environments and is suitable for applications which may involve software processing of system information such as interactive multi-media applications. Program stream packets may be of variable and relatively great length.

The transport stream combines one or more programs with one or more independent time bases into a single stream. PES packets made up of elementary streams that form a program share a common time base. The transport stream is designed for use in environments where errors are likely, such as storage or transmission in lossy or noisy media. Transport stream packets are 188 bytes in length.

Program and transport streams are designed for different applications and their definitions do not strictly follow a layered model. It is possible and reasonable to convert from one to the other; however, one is not a subset or superset of the other. In particular, extracting the contents of a program from a transport stream and creating a valid program stream is possible and is accomplished through the common interchange format of PES packets, but not all of the fields needed in a program stream are contained within the transport stream; some must be derived. The transport stream may be used to span a range of layers in a layered model, and is designed for efficiency and ease of implementation in high bandwidth applications.

The scope of syntactical and semantic rules set forth in the systems specification differs: the syntactical rules apply to systems layer coding only, and do not extend to the compression layer coding of the video and audio specifications; by contrast, the semantic rules apply to the combined stream in its entirety.

The systems specification does not specify the architecture or implementation of encoders or decoders, nor those of multiplexors or demultiplexors. However, bit stream properties do impose functional and performance requirements on encoders, decoders, multiplexors and demultiplexors. For instance, encoders must meet minimum clock tolerance requirements. Notwithstanding this and other requirements, a considerable degree of freedom exists in the design and implementation of encoders, decoders, multiplexors, and demultiplexors.

Intro. 1 Transport stream

The transport stream is a stream definition which is tailored for communicating or storing one or more programs of coded data according to Rec. ITU-T H.262 | ISO/IEC 13818-2 and ISO/IEC 13818-3 and other data in environments in which significant errors may occur. Such errors may be manifested as bit value errors or loss of packets.

Transport streams may be either fixed or variable rate. In either case the constituent elementary streams may either be fixed or variable rate. The syntax and semantic constraints on the stream are identical in each of these cases. The transport stream rate is defined by the values and locations of program clock reference (PCR) fields, which in general are separate PCR fields for each program.

There are some difficulties with constructing and delivering a transport stream containing multiple programs with independent time bases such that the overall bit rate is variable. Refer to 2.4.2.3.

The transport stream may be constructed by any method that results in a valid stream. It is possible to construct transport streams containing one or more programs from elementary coded data streams, from program streams, or from other transport streams which may themselves contain one or more programs.

The transport stream is designed in such a way that several operations on a transport stream are possible with minimum effort. Among these are:

- 1) Retrieve the coded data from one program within the transport stream, decode it and present the decoded results as shown in Figure Intro. 2.
- 2) Extract the transport stream packets from one program within the transport stream and produce as output a different transport stream with only that one program as shown in Figure Intro. 3.
- 3) Extract the transport stream packets of one or more programs from one or more transport streams and produce as output a different transport stream (not illustrated).
- 4) Extract the contents of one program from the transport stream and produce as output a program stream containing that one program as shown in Figure Intro. 4.
- 5) Take a program stream, convert it into a transport stream to carry it over a lossy environment, and then recover a valid, and in certain cases, identical program stream.

Figure Intro. 2 and Figure Intro. 3 illustrate prototypical demultiplexing and decoding systems which take as input a transport stream. Figure Intro. 2 illustrates the first case, where a transport stream is directly demultiplexed and decoded. Transport streams are constructed in two layers:

- a system layer; and
- a compression layer.

The input stream to the transport stream decoder has a system layer wrapped about a compression layer. Input streams to the video and audio decoders have only the compression layer.

Operations performed by the prototypical decoder which accepts transport streams either apply to the entire transport stream ("multiplex-wide operations"), or to individual elementary streams ("stream-specific operations"). The transport stream system layer is divided into two sub-layers, one for multiplex-wide operations (the transport stream packet layer), and one for stream-specific operations (the PES packet layer).

A prototypical decoder for transport streams, including audio and video, is also depicted in Figure Intro. 2 to illustrate the function of a decoder. The architecture is not unique – some system decoder functions, such as decoder timing control, might equally well be distributed among elementary stream decoders and the channel-specific decoder – but this figure is useful for discussion. Likewise, indication of errors detected by the channel-specific decoder to the individual audio and video decoders may be performed in various ways and such communication paths are not shown in the diagram. The prototypical decoder design does not imply any normative requirement for the design of a transport stream decoder. Indeed non-audio/video data is also allowed, but not shown.

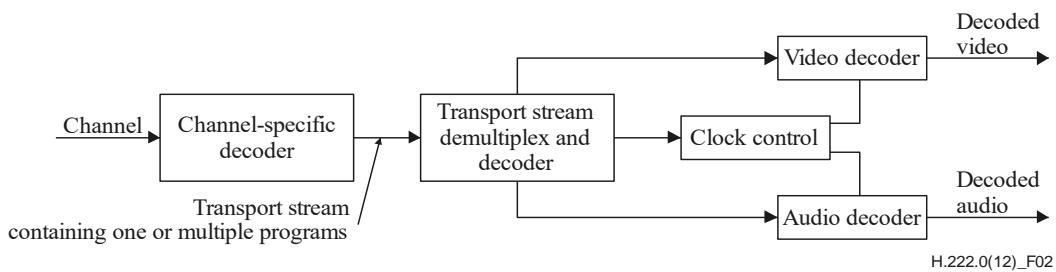


Figure Intro. 2 – Prototypical transport demultiplexing and decoding example

Figure Intro. 3 illustrates the second case, where a transport stream containing multiple programs is converted into a transport stream containing a single program. In this case the re-multiplexing operation may necessitate the correction of program clock reference (PCR) values to account for changes in the PCR locations in the bit stream.

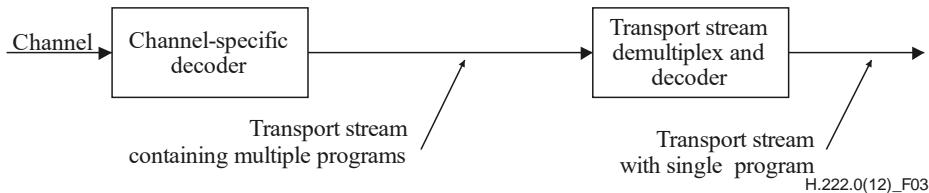


Figure Intro. 3 – Prototypical transport multiplexing example

Figure Intro. 4 illustrates a case in which a multi-program transport stream is first demultiplexed and then converted into a program stream.

Figures Intro. 3 and Intro. 4 indicate that it is possible and reasonable to convert between different types and configurations of transport streams. There are specific fields defined in the transport stream and program stream syntax which facilitate the conversions illustrated. There is no requirement that specific implementations of demultiplexors or decoders include all of these functions.

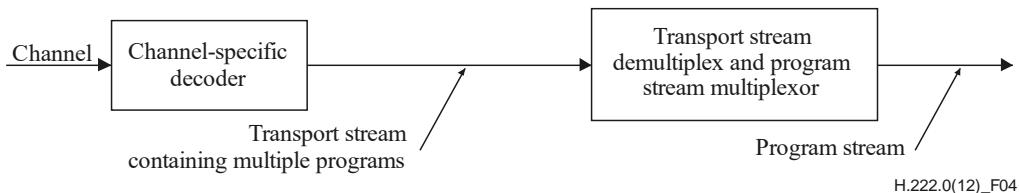


Figure Intro. 4 – Prototypical transport stream to program stream conversion

Intro. 2 Program stream

The program stream is a stream definition which is tailored for communicating or storing one program of coded data and other data in environments where errors are very unlikely, and where processing of system coding, e.g., by software, is a major consideration.

Program streams may be either fixed or variable rate. In either case, the constituent elementary streams may be either fixed or variable rate. The syntax and semantics constraints on the stream are identical in each case. The program stream rate is defined by the values and locations of the system clock reference (SCR) and mux_rate fields.

A prototypical audio/video program stream decoder system is depicted in Figure Intro. 5. The architecture is not unique – system decoder functions including decoder timing control might as equally well be distributed among elementary stream decoders and the channel-specific decoder – but this figure is useful for discussion. The prototypical decoder design does not imply any normative requirement for the design of a program stream decoder. Indeed, non-audio/video data is also allowed, but not shown.

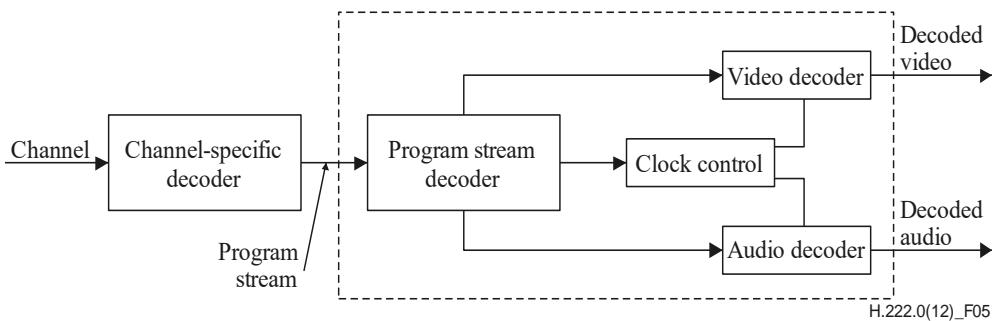


Figure Intro. 5 – Prototypical decoder for program streams

The prototypical decoder for program streams shown in Figure Intro. 5 is composed of system, video and audio decoders conforming to Parts 1, 2 and 3, respectively, of ISO/IEC 13818. In this decoder, the multiplexed coded representation of one or more audio and/or video streams is assumed to be stored or communicated on some channel in some channel-specific format. The channel-specific format is not governed by this Recommendation | International Standard, nor is the channel-specific decoding part of the prototypical decoder.

The prototypical decoder accepts as input a program stream and relies on a program stream decoder to extract timing information from the stream. The program stream decoder demultiplexes the stream, and the elementary streams so produced serve as inputs to video and audio decoders, whose outputs are decoded video and audio signals. Included in the design, but not shown in the figure, is the flow of timing information among the program stream decoder, the video and audio decoders, and the channel-specific decoder. The video and audio decoders are synchronized with each other and with the channel using this timing information.

Program streams are constructed in two layers: a system layer and a compression layer. The input stream to the program stream decoder has a system layer wrapped about a compression layer. Input streams to the video and audio decoders have only the compression layer.

Operations performed by the prototypical decoder either apply to the entire program stream ("multiplex-wide operations"), or to individual elementary streams ("stream-specific operations"). The program stream system layer is divided into two sub-layers, one for multiplex-wide operations (the pack layer), and one for stream-specific operations (the PES packet layer).

Intro. 3 Conversion between transport stream and program stream

It may be possible and reasonable to convert between transport streams and program streams by means of PES packets. This results from the specification of transport stream and program stream as embodied in 2.4.1 and 2.5.1 of the normative requirements of this Recommendation | International Standard. PES packets may, with some constraints, be mapped directly from the payload of one multiplexed bit stream into the payload of another multiplexed bit stream. It is possible to identify the correct order of PES packets in a program to assist with this if the `program_packet_sequence_counter` is present in all PES packets.

Certain other information necessary for conversion, e.g., the relationship between elementary streams, is available in tables and headers in both streams. Such data, if available, shall be correct in any stream before and after conversion.

Intro. 4 Packetized elementary stream

Transport streams and program streams are each logically constructed from PES packets, as indicated in the syntax definitions in 2.4.3.6. PES packets shall be used to convert between transport streams and program streams; in some cases the PES packets need not be modified when performing such conversions. PES packets may be much larger than the size of a transport stream packet.

A continuous sequence of PES packets of one elementary stream with one stream ID may be used to construct a PES Stream. When PES packets are used to form a PES stream, they shall include elementary stream clock reference (ESCR) fields and elementary stream rate (ES_Rate) fields, with constraints as defined in 2.4.3.8. The PES stream data shall be contiguous bytes from the elementary stream in their original order. PES streams do not contain some necessary system information which is contained in program streams and transport streams. Examples include the information in the pack header, system header, program stream map, program stream directory, program map table, and elements of the transport stream packet syntax.

The PES stream is a logical construct that may be useful within implementations of this Recommendation | International Standard; however, it is not defined as a stream for interchange and interoperability. Applications requiring streams containing only one elementary stream can use program streams or transport streams which each contain only one elementary stream. These streams contain all of the necessary system information. Multiple program streams or transport streams, each containing a single elementary stream, can be constructed with a common time base and therefore carry a complete program, i.e., with audio and video.

Intro. 5 Timing model

Systems, video and audio all have a timing model in which the end-to-end delay from the signal input to an encoder to the signal output from a decoder is a constant. This delay is the sum of encoding, encoder buffering, multiplexing, communication or storage, demultiplexing, decoder buffering, decoding, and presentation delays. As part of this timing model all video pictures and audio samples are presented exactly once, unless specifically coded to the contrary, and the inter-picture interval and audio sample rate are the same at the decoder as at the encoder. The system stream coding contains timing information which can be used to implement systems which embody constant end-to-end delay. It is possible to implement decoders which do not follow this model exactly; however, in such cases it is the decoder's responsibility to perform in an acceptable manner. The timing is embodied in the normative specifications of this Recommendation | International Standard, which must be adhered to by all valid bit streams, regardless of the means of creating them.

All timing is defined in terms of a common system clock, referred to as a system time clock (STC). In the program stream this clock may have an exactly specified ratio to the video or audio sample clocks, or it may have an operating frequency which differs slightly from the exact ratio while still providing precise end-to-end timing and clock recovery.

In the transport stream the system clock frequency is constrained to have the exactly specified ratio to the audio and video sample clocks at all times; the effect of this constraint is to simplify sample rate recovery in decoders.

Intro. 6 Conditional access

Encryption and scrambling for conditional access to programs encoded in the program and transport streams is supported by the system data stream definitions. Conditional access mechanisms are not specified here. The stream definitions are designed so that implementation of practical conditional access systems is reasonable, and there are some syntactical elements specified which provide specific support for such systems.

Intro. 7 Multiplex-wide operations

Multiplex-wide operations include the coordination of data retrieval of the channel, the adjustment of clocks, and the management of buffers. The tasks are intimately related. If the rate of data delivery of the channel is controllable, then data delivery may be adjusted so that decoder buffers neither overflow nor underflow; but if the data rate is not controllable, then elementary stream decoders must slave their timing to the data received from the channel to avoid overflow or underflow.

Program streams are composed of packs whose headers facilitate the above tasks. Pack headers specify intended times at which each byte is to enter the program stream Decoder from the channel, and this target arrival schedule serves as a reference for clock correction and buffer management. The schedule need not be followed exactly by decoders, but they must compensate for deviations about it.

Similarly, transport streams are composed of transport stream packets with headers containing information which specifies the times at which each byte is intended to enter a transport stream decoder from the channel. This schedule provides exactly the same function as that which is specified in the program stream.

An additional multiplex-wide operation is a decoder's ability to establish what resources are required to decode a transport stream or program stream. The first pack of each program stream conveys parameters to assist decoders in this task. Included, for example, are the stream's maximum data rate and the highest number of simultaneous video channels. The transport stream likewise contains globally useful information.

The transport stream and program stream each contain information which identifies the pertinent characteristics of, and relationships between, the elementary streams which constitute each program. Such information may include the language spoken in audio channels, as well as the relationship between video streams when multi-layer video coding is implemented.

Intro. 8 Individual stream operations (PES packet layer)

The principal stream-specific operations are:

- 1) demultiplexing; and
- 2) synchronizing playback of multiple elementary streams.

Intro. 8.1 Demultiplexing

On encoding, program streams are formed by multiplexing elementary streams, and transport streams are formed by multiplexing elementary streams, program streams, or the contents of other transport streams. Elementary streams may include private, reserved, and padding streams in addition to audio and video streams. The streams are temporally subdivided into packets, and the packets are serialized. A PES packet contains coded bytes from one and only one elementary stream.

In the program stream both fixed and variable packet lengths are allowed subject to constraints as specified in 2.5.1 and 2.5.2. For transport streams the packet length is 188 bytes. Both fixed and variable PES packet lengths are allowed, and will be relatively long in most applications.

On decoding, demultiplexing is required to reconstitute elementary streams from the multiplexed program stream or transport stream. Stream_id codes in program stream packet headers, and packet ID codes in the transport stream make this possible.

Intro. 8.2 Synchronization

Synchronization among multiple elementary streams is accomplished with presentation time stamps (PTSs) in the program stream and transport streams. Time stamps are generally in units of 90 kHz, but the system clock reference (SCR), the program clock reference (PCR) and the optional elementary stream clock reference (ESCR) have extensions with a resolution of 27 MHz. Decoding of N-elementary streams is synchronized by adjusting the decoding of streams to a common master time base rather than by adjusting the decoding of one stream to match that of another. The master time base may be one of the N-decoders' clocks, the data source's clock, or it may be some external clock.

Each program in a transport stream, which may contain multiple programs, may have its own time base. The time bases of different programs within a transport stream may be different.

Because PTSs apply to the decoding of individual elementary streams, they reside in the PES packet layer of both the transport streams and program streams. End-to-end synchronization occurs when encoders save time stamps at capture time, when the time stamps propagate with associated coded data to decoders, and when decoders use those time stamps to schedule presentations.

Synchronization of a decoding system with a channel is achieved through the use of the SCR in the program stream and by its analogue, the PCR, in the transport stream. The SCR and PCR are time stamps encoding the timing of the bit stream itself, and are derived from the same time base used for the audio and video PTS values from the same program. Since each program may have its own time base, there are separate PCR fields for each program in a transport stream containing multiple programs. In some cases it may be possible for programs to share PCR fields. Refer to 2.4.4, program-specific information (PSI), for the method of identifying which PCR is associated with a program. A program shall have one and only one PCR time base associated with it.

Intro. 8.3 Relation to compression layer

The PES packet layer is independent of the compression layer in some senses, but not in all. It is independent in the sense that PES packet payloads need not start at compression layer start codes, as defined in Parts 2 and 3 of ISO/IEC 13818. For example, video start codes may occur anywhere within the payload of a PES packet, and start codes may be split by a PES packet header. However, time stamps encoded in PES packet headers apply to presentation times of compression layer constructs (namely, presentation units). In addition, when the elementary stream data conforms to Rec. ITU-T H.262 | ISO/IEC 13818-2 or ISO/IEC 13818-3, the PES_packet_data_bytes shall be byte aligned to the bytes of this Recommendation | International Standard.

Intro. 9 System reference decoder

Part 1 of ISO/IEC 13818 employs a "system target decoder" (STD), one for transport streams (refer to 2.4.2) referred to as "transport system target decoder" (T-STD) and one for program streams (refer to 2.5.2) referred to as "program system target decoder" (P-STD), to provide a formalism for timing and buffering relationships. Because the STD is parameterized in terms of Rec. ITU-T H.222.0 | ISO/IEC 13818-1 fields (for example, buffer sizes) each elementary stream leads to its own parameterization of the STD. Encoders shall produce bit streams that meet the appropriate STD's constraints. Physical decoders may assume that a stream plays properly on its STD. The physical decoder must compensate for ways in which its design differs from that of the STD.

Intro. 10 Applications

The streams defined in this Recommendation | International Standard are intended to be as useful as possible to a wide variety of applications. Application developers should select the most appropriate stream.

Modern data communications networks may be capable of supporting Rec. ITU-T H.222.0 | ISO/IEC 13818-1 video and ISO/IEC 13818 audio. A real-time transport protocol is required. The program stream may be suitable for transmission on such networks.

The program stream is also suitable for multimedia applications on CD-ROM. Software processing of the program stream may be appropriate.

The transport stream may be more suitable for error-prone environments, such as those used for distributing compressed bit-streams over long-distance networks and in broadcast systems.

Many applications require storage and retrieval of Rec. ITU-T H.222.0 | ISO/IEC 13818-1 bitstreams on various digital storage media (DSM). A digital storage media command and control (DSM-CC) protocol is specified in Annex B and Part 6 of ISO/IEC 13818 in order to facilitate the control of such media.

INTERNATIONAL STANDARD
ITU-T RECOMMENDATION

**Information technology – Generic coding of moving pictures and
associated audio information: Systems**

SECTION 1 – GENERAL

1.1 Scope

This Recommendation | International Standard specifies the system layer of the coding. It was developed principally to support the combination of the video and audio coding methods defined in Parts 2 and 3 of ISO/IEC 13818. The system layer supports six basic functions:

- 1) the synchronization of multiple compressed streams on decoding;
- 2) the interleaving of multiple compressed streams into a single stream;
- 3) the initialization of buffering for decoding start up;
- 4) continuous buffer management;
- 5) time identification;
- 6) multiplexing and signalling of various components in a system stream.

A Rec. ITU-T H.222.0 | ISO/IEC 13818-1 multiplexed bit stream is either a transport stream or a program stream. Both streams are constructed from PES packets and packets containing other necessary information. Both stream types support multiplexing of video and audio compressed streams from one program with a common time base. The transport stream additionally supports the multiplexing of video and audio compressed streams from multiple programs with independent time bases. For almost error-free environments the program stream is generally more appropriate, supporting software processing of program information. The transport stream is more suitable for use in environments where errors are likely.

A Rec. ITU-T H.222.0 | ISO/IEC 13818-1 multiplexed bit stream, whether a transport stream or a program stream, is constructed in two layers: the outermost layer is the system layer, and the innermost is the compression layer. The system layer provides the functions necessary for using one or more compressed data streams in a system. The video and audio parts of this Specification define the compression coding layer for audio and video data. Coding of other types of data is not defined by this Specification, but is supported by the system layer provided that the other types of data adhere to the constraints defined in 2.7.

1.2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

1.2.1 Identical Recommendations | International Standards

- Recommendation ITU-T H.262 (2012) | ISO/IEC 13818-2:2013, *Information technology – Generic coding of moving pictures and associated audio information: Video*.
- Recommendation ITU-T T.800 (2019) | ISO/IEC 15444-1:2019, *Information technology – JPEG 2000 image coding system: Core coding system*.

1.2.2 Paired Recommendations | International Standards equivalent in technical content

- Recommendation ITU-T H.264 (2019), *Advanced video coding for generic audiovisual services*.
ISO/IEC 14496-10:2020, *Information technology – Coding of audio-visual objects – Part 10: Advanced video coding*.
- Recommendation ITU-T H.265 (2019), *High efficiency video coding*.
ISO/IEC 23008-2:2020, *Information technology – High efficiency coding and media delivery in heterogeneous environments – Part 2: High efficiency video coding*.

- Recommendation ITU-T H.273 (2021), *Coding-independent code points for video signal type identification*.
- ISO/IEC 23091-2:2021, *Information technology — Coding-independent code points — Part 2: Video*.
- Recommendation ITU-T T.171 (1996), *Protocols for interactive audiovisual services: coded representation of multimedia and hypermedia objects*.
- ISO/IEC 13522-1:1997, *Information technology – Coding of Multimedia and Hypermedia information – Part 1: MHEG object representation – Base notation (ASN.1)*.
- Recommendation ITU-T H.266 (2020), *Versatile video coding*.
- ISO/IEC 23090-3:2021, *Information technology – Coded Representation of Immersive Media – Part 3: Versatile video coding*.
- Recommendation ITU-T H.274 (2020), *Versatile supplemental enhancement information messages for coded video bitstreams*.
- ISO/IEC 23002-7:2021 – *Information Technology – MPEG Video technologies – Part 7: Versatile supplemental enhancement information messages for coded video bitstreams*.

1.2.3 Additional references

- Recommendation ITU-R BT.709-6 (2015), *Parameter values for the HDTV standards for production and international programme exchange*.
- Recommendation ITU-R BT.1886 (2011), *Reference electro-optical transfer function for flat panel displays used in HDTV studio production*.
- Recommendation ITU-R BT.2020 (2015), *Parameter values for ultra-high definition television systems for production and international programme exchange*.
- Recommendation ITU-R BT.2100-2 (2018), *Image parameter values for high dynamic range television for use in production and international programme exchange*.
- ISO 639-2:1998, *Codes for the representation of names of languages – Part 2: Alpha-3 code*.
- ISO 8859-1:1998, *Information technology – 8-bit single-byte coded graphic character sets – Part 1: Latin alphabet No. 1*.
- ISO 15706-1:2002, *Information and documentation – International Standard Audiovisual Number (ISAN) – Part 1: Audiovisual work identifier*.
- ISO 15706-2:2007, *Information and documentation – International Standard Audiovisual Number (ISAN) – Part 2: Version identifier*.
- ISO/IEC 11172-1:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 1: Systems*.
- ISO/IEC 11172-2:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 2: Video*.
- ISO/IEC 11172-3:1993, *Information technology – Coding of moving pictures and associated audio for digital storage media at up to about 1,5 Mbit/s – Part 3: Audio*.
- ISO/IEC 13818-3:1998, *Information technology – Generic coding of moving pictures and associated audio information – Part 3: Audio*.
- ISO/IEC 13818-6:1998, *Information technology – Generic coding of moving pictures and associated audio information – Part 6: Extensions for DSM-CC*.
- ISO/IEC 13818-7:2006, *Information technology – Generic coding of moving pictures and associated audio information – Part 7: Advanced Audio Coding (AAC)*.
- ISO/IEC 13818-11:2004, *Information technology – Generic coding of moving pictures and associated audio information – Part 11: IPMP on MPEG-2 systems*.
- ISO/IEC 14496-1:2010, *Information technology – Coding of audio-visual objects – Part 1: Systems*.
- ISO/IEC 14496-2:2004, *Information technology – Coding of audio-visual objects – Part 2: Visual*.
- ISO/IEC 14496-3:2019, *Information technology – Coding of audio-visual objects – Part 3: Audio*.
- ISO/IEC 14496-17:2006, *Information technology, Coding of audio-visual objects – Part 17: Streaming text format*.
- ISO/IEC 21122-1:2019, *JPEG XS low-latency lightweight image coding system – Part 1: Core coding system*.

- ISO/IEC 21122-2:2019, *JPEG XS low-latency lightweight image coding system – Part 2: Profiles and buffer models*.
- ISO/IEC 21122-3:2019, *JPEG XS low-latency lightweight image coding system – Part 3: Transport and container formats*.
- ISO/IEC 23001-8:2016, *Information technology – MPEG systems technologies – Part 8: Coding-independent code-points*.
- ISO/IEC 23001-10:2020, *Information technology – MPEG systems technologies – Part 10: Carriage of timed metadata metrics of media in ISO base media file format*.
- ISO/IEC 23001-11:2019, *Information technology – MPEG systems technologies – Part 11: Energy-efficient media consumption (Green Metadata)*.
- ISO/IEC 23001-12:2018, *Information technology – MPEG systems technologies – Part 12: Sample Variants*.
- ISO/IEC 23001-13:2019, *Information technology – MPEG systems technologies – Part 13: Media Orchestration*.
- ISO/IEC 23003-3:2020, *Information technology – MPEG audio technologies – Part 3: Unified speech and audio coding*.
- ISO/IEC 23003-4:2020, *Information technology – MPEG audio technologies – Part 4: Dynamic Range Control*.
- ISO/IEC 23008-3:2019, *Information technology – High efficiency coding and media delivery in heterogeneous environments – Part 3: 3D audio*.
- ISO/IEC 23091-2:2019, *Coding-independent code points – Part 2: Video*.
- ISO/IEC 23094-1:2020, *Information technology – General video coding – Part 1: Essential video coding*.
- ISO/IEC 23094-2:2021, *Information technology – General video coding – Part 2: Low complexity enhancement video coding*.
- ANSI/SCTE 35 (2019), *Digital Program Insertion Cueing Message for Cable*.
- IETF BCP 47: IETF RFC 4647 (2006) *Matching of Language Tags* combined with IETF RFC 5646 (2009), *Tags for Identifying Languages*.
- IETF RFC 3986 (2005), *Uniform Resource Identifier (URI): Generic Syntax*.
- IETF RFC 5484 (2009), *Associating Time-Codes with RTP Streams*.