

**INTERNATIONAL  
STANDARD**

**ISO/IEC  
14776-342**

First edition  
2000-06

---

---

**Information technology –  
Small Computer System Interface –**

**Part 342:  
Controller Commands-2 (SCC-2)**



Reference number  
ISO/IEC 14776-342:2000(E)

## **PATENT STATEMENT**

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this International Standard may involve the use of patents concerning SCC-2.

The ISO and IEC take no position concerning the evidence, validity and scope of the patent rights. The holder of the putative patent rights has assured the ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of the putative patent rights is registered with the ISO and IEC. Information may be obtained from:

IBM Corporation  
Intellectual Property Licensing  
5600 Cottle Road  
San Jose, CA 95153

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

## Contents

	Page
Foreword .....	ix
Introduction .....	x
1 Scope .....	1
2 Normative references .....	1
3 Definitions, symbols, abbreviations, and conventions .....	1
3.1 Definitions .....	1
3.2 Symbols and abbreviations .....	4
3.3 Keywords .....	4
3.4 Conventions .....	5
4 General .....	6
5 Models for systems containing arrays of devices .....	7
5.1 Model overview .....	7
5.2 System layering model .....	7
5.2.1 SAACL functions .....	7
5.2.2 Protocol conversion layer .....	8
5.2.3 Storage array conversion layer (SAACL) .....	9
5.2.4 Examples of system layering variations .....	10
5.2.5 Branch of generic layers .....	11
5.2.6 Software SAACL with a branch of SCSI disks .....	12
5.2.7 Branch with HBA SAACL .....	13
5.2.8 Branch with bridge controller SAACL .....	14
5.2.9 Branch with SAACLs in multiple layers .....	15
5.3 Model for SCSI storage arrays .....	15
5.3.1 SCSI storage array addressing .....	16
5.3.1.1 SCSI storage array LUN_Z address .....	16
5.3.1.2 Direct addressing .....	16
5.3.1.2.1 Eight byte LUN structure .....	16
5.3.1.2.2 Logical unit address method .....	18
5.3.1.2.3 Peripheral device address method .....	18
5.3.1.2.4 Volume set address method .....	19
5.3.1.3 Indirect addressing .....	20
5.3.1.3.1 Component device address method .....	20
5.3.1.3.2 Logical unit address method .....	20
5.3.1.3.3 Peripheral device address method .....	20
5.3.1.3.4 Redundancy group address method .....	21
5.3.1.3.5 Spare address method .....	21
5.3.1.3.6 Volume set address method .....	21
5.3.2 SCSI storage array objects .....	21
5.3.2.1 Adding objects .....	22
5.3.2.2 Association of objects .....	22
5.3.2.3 Attachment of objects .....	22
5.3.2.4 Covering of objects .....	22
5.3.2.5 Exchanging objects .....	23
5.3.2.6 Protected objects .....	23
5.3.2.7 Removing objects .....	23
5.3.2.8 Component device .....	23
5.3.2.9 Peripheral device .....	23
5.3.2.10 P_extent .....	24
5.3.2.11 Ps_extent .....	24
5.3.2.12 Redundancy group .....	24
5.3.2.12.1 No redundancy method of check data mapping .....	28
5.3.2.12.2 Copy redundancy method of check data mapping .....	28

5.3.2.12.3 XOR or P+Q redundancy method of check data mapping .....	28
5.3.2.12.4 S redundancy method of check data mapping .....	28
5.3.2.12.5 P+S redundancy method of check data mapping .....	28
5.3.2.12.6 Vendor specific redundancy method of check data mapping .....	29
5.3.2.13 Spares .....	29
5.3.2.14 Volume sets .....	30
5.3.3 SCSI storage array operations .....	35
5.3.3.1 Deassign LUN_V operation .....	35
5.3.3.2 Rebuild operation .....	35
5.3.3.3 Recalculate operation .....	35
5.3.3.4 Regenerate operation .....	35
5.3.3.5 Verify operation .....	35
5.3.4 SCSI storage array states .....	35
5.3.5 SCSI storage array configuration options .....	36
5.3.5.1 Simple configuration method .....	36
5.3.5.2 Basic configuration method .....	36
5.3.5.3 General configuration method .....	37
5.3.6 SCSI storage array exception conditions .....	38
<b>6 Commands for SCSI storage array devices .....</b>	<b>39</b>
6.1 Op codes for SCSI storage array commands .....	39
6.2 Glossary of SCSI storage array service actions .....	39
6.2.1 MAINTENANCE (IN) command service actions .....	39
6.2.1.11 MAINTENANCE (OUT) command service actions .....	40
6.2.1.20 REDUNDANCY GROUP (IN) command service actions .....	40
6.2.1.24 REDUNDANCY GROUP (OUT) command service actions .....	41
6.2.1.33 SPARE (IN) command service actions .....	41
6.2.1.36 SPARE (OUT) command service actions .....	41
6.2.1.40 VOLUME SET (IN) command service actions .....	41
6.2.1.45 VOLUME SET (OUT) command service actions .....	41
6.3 MAINTENANCE(IN) command .....	43
6.3.1 MAINTENANCE(IN) command service actions .....	43
6.3.1.1 REPORT ASSIGNED/UNASSIGNED P_EXTENT service action .....	43
6.3.1.2 REPORT COMPONENT DEVICE service action .....	46
6.3.1.3 REPORT COMPONENT DEVICE ATTACHMENTS service .....	49
6.3.1.4 REPORT DEVICE IDENTIFICATION service action .....	52
6.3.1.5 REPORT PERIPHERAL DEVICE service action .....	53
6.3.1.6 REPORT PERIPHERAL DEVICE ASSOCIATIONS service action .....	55
6.3.1.7 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action .....	57
6.3.1.8 REPORT STATES service action .....	59
6.3.1.9 REPORT SUPPORTED CONFIGURATION METHOD service action .....	66
6.3.1.10 REPORT UNCONFIGURED CAPACITY service action .....	68
6.4 MAINTENANCE (OUT) commands .....	70
6.4.1 MAINTENANCE (OUT) command service actions .....	70
6.4.1.1 ADD PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	70
6.4.1.2 ATTACH TO COMPONENT DEVICE service action .....	71
6.4.1.3 BREAK PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	73
6.4.1.4 EXCHANGE P_EXTENT service action .....	74
6.4.1.5 EXCHANGE PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	75
6.4.1.6 INSTRUCT COMPONENT DEVICE service action .....	76
6.4.1.7 REMOVE PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	77
6.4.1.8 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action .....	78
6.5 REDUNDANCY GROUP (IN) command .....	80
6.5.1 REDUNDANCY GROUP (IN) command service actions .....	80
6.5.1.1 REPORT BASIC REDUNDANCY GROUP service action .....	80
6.5.1.2 REPORT REDUNDANCY GROUPS service action .....	83
6.5.1.3 REPORT UNASSIGNED REDUNDANCY GROUP SPACE service action .....	87
6.6 REDUNDANCY GROUP (OUT) command .....	90
6.6.1 REDUNDANCY GROUP (OUT) command service actions .....	90
6.6.1.1 CONTROL GENERATION OF CHECK DATA service action .....	91
6.6.1.2 CREATE/MODIFY BASIC REDUNDANCY GROUP service action .....	92

6.6.1.3 CREATE/MODIFY REDUNDANCY GROUP service action .....	97
6.6.1.4 DELETE REDUNDANCY GROUP service action .....	101
6.6.1.5 REBUILD P_EXTENT service action .....	102
6.6.1.6 REBUILD PERIPHERAL DEVICE service action .....	105
6.6.1.7 RECALCULATE CHECK DATA service action .....	108
6.6.1.8 VERIFY CHECK DATA service action .....	109
6.7 VOLUME SET (IN) command .....	112
6.7.1 VOLUME SET (IN) command service actions .....	112
6.7.1.1 REPORT BASIC VOLUME SET service action .....	112
6.7.1.2 REPORT STORAGE ARRAY CONFIGURATION service action .....	115
6.7.1.3 REPORT UNASSIGNED VOLUME SETS service action .....	118
6.7.1.4 REPORT VOLUME SETS service action .....	120
6.8 VOLUME SET (OUT) command .....	123
6.8.1 VOLUME SET (OUT) command service actions .....	123
6.8.1.1 ASSIGN LUN_V service action .....	124
6.8.1.2 CONTROL GENERATION OF CHECK DATA service action .....	126
6.8.1.3 CONTROL WRITE OPERATIONS service action .....	127
6.8.1.4 CREATE/MODIFY BASIC VOLUME SET service action .....	128
6.8.1.5 CREATE/MODIFY STORAGE ARRAY CONFIGURATION service action .....	133
6.8.1.6 CREATE/MODIFY VOLUME SET service action .....	138
6.8.1.7 DEASSIGN LUN_V service action .....	142
6.8.1.8 DELETE VOLUME SET service action .....	143
6.8.1.9 RECALCULATE VOLUME SET CHECK DATA service action .....	144
6.8.1.10 VERIFY VOLUME SET CHECK DATA service action .....	146
6.9 SPARE (IN) command .....	149
6.9.1 SPARE (IN) command service actions .....	149
6.9.1.1 REPORT P_EXTENT SPARE service action .....	149
6.9.1.2 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action .....	152
6.10 SPARE (OUT) command .....	155
6.10.1 SPARE (OUT) command service actions .....	155
6.10.1.1 CREATE/MODIFY P_EXTENT SPARE service action .....	156
6.10.1.2 CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action ...	159
6.10.1.3 DELETE SPARE service action .....	161
6.11 Parameters for storage array devices .....	163
6.11.1 Mode parameters .....	163
6.11.1.1 LUN mapping page .....	163
Annex A (normative) SCSI storage array IDENTIFY message format .....	165
A.1 SCSI storage array IDENTIFY message overview .....	165
A.2 IDENTIFY message .....	165
Annex B (informative) SCSI storage array addressing examples .....	166
B.1 SCSI storage array addressing examples overview .....	166
B.2 Addressing Examples for the 8-byte LUN structure .....	166
B.3 Addressing Examples for the 6-bit LUN structure .....	169
Annex C (informative) Examples of check data and user data mappings .....	170
C.1 Example P+S redundancy mapping .....	170
C.2 Example XOR redundancy mapping .....	170
C.3 User data mapping examples .....	171
Annex D (informative) Example of a SCSI storage array configuration using a CREATE/MODIFY ARRAY CONFIGURATION service action .....	175
D.1 Example .....	175

## Tables

	Page
1 Addressing methods within a SCSI storage array .....	16
2 Eight byte LUN structure adjustments .....	17
3 Eight byte LUN structure .....	17
4 FIRST LEVEL ADDRESSING field, SECOND LEVEL ADDRESSING field, THIRD LEVEL ADDRESSING field, and FOURTH LEVEL ADDRESSING field .....	18
5 ADDRESS METHOD .....	18
6 Logical unit addressing .....	18
7 Peripheral device addressing .....	19
8 Volume set addressing .....	20
9 Component device address .....	20
10 Redundancy group address .....	21
11 Spare address .....	21
12 Commands for SCSI storage array devices .....	39
13 Service actions for MAINTENANCE(IN) command .....	43
14 REPORT ASSIGNED/UNASSIGNED P_EXTENT service action .....	44
15 REPORT ASSIGNED/UNASSIGNED P_EXTENT parameter list .....	45
16 Data format of ASSIGNED/UNASSIGNED P_EXTENT DESCRIPTOR .....	45
17 Data format of P_EXTENT DESCRIPTOR .....	46
18 REPORT COMPONENT DEVICE service action .....	47
19 REPORT COMPONENT DEVICE parameter list .....	48
20 Data format of COMPONENT DEVICE DESCRIPTOR .....	48
21 COMPONENT DEVICE TYPES .....	49
22 REPORT COMPONENT DEVICE ATTACHMENTS service action .....	49
23 REPORT COMPONENT DEVICE ATTACHMENTS parameter list .....	50
24 Format of COMPONENT DEVICE ATTACHMENT DESCRIPTOR .....	51
25 Data format of LOGICAL UNIT DESCRIPTOR .....	51
26 LOGICAL UNIT types .....	52
27 REPORT DEVICE IDENTIFICATION service action .....	52
28 REPORT PERIPHERAL DEVICE service action .....	53
29 SELECT REPORT .....	54
30 REPORT PERIPHERAL DEVICE parameter List .....	54
31 Format of PERIPHERAL DEVICE DESCRIPTOR .....	55
32 REPORT PERIPHERAL DEVICE ASSOCIATIONS service action .....	55
33 REPORT PERIPHERAL DEVICE ASSOCIATIONS parameter list .....	56
34 Format of PERIPHERAL DEVICE ASSOCIATIONS DESCRIPTOR .....	57
35 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action .....	58
36 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER parameter list .....	58
37 REPORT STATES service action .....	59
38 REPORT STATES .....	60
39 REPORT STATES parameter list .....	60
40 Format of LOGICAL UNIT STATES DESCRIPTORS .....	61
41 LUN_Z states .....	62
42 Volume set states .....	63
43 Redundancy group states .....	64
44 Peripheral device and p_extent states .....	65
45 Spare states .....	65
46 Component device states .....	66
47 REPORT SUPPORTED CONFIGURATION METHOD service action .....	67
48 REPORT SUPPORTED CONFIGURATIN METHOD parameter list .....	67
49 SIMPLE .....	68
50 BASIC .....	68
51 GENERAL .....	68
52 REPORT UNCONFIGURED CAPACITY service action .....	69
53 REPORT UNCONFIGURED CAPACITY parameter list .....	69
54 Service actions for MAINTENANCE (OUT) command .....	70
55 ADD PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	71
56 ATTACH COMPONENT DEVICE service actions .....	72
57 ATTACH COMPONENT DEVICE parameter list .....	73
58 BREAK PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	73

59 EXCHANGE P_EXTENT service action .....	74
60 EXCHANGE P_EXTENT parameters list .....	75
61 EXCHANGE PERIPHERAL DEVICE/COMPONENT DEVICE Service Action .....	75
62 INSTRUCT COMPONENT DEVICE service action .....	76
63 COMPONENT DEVICE INSTRUCTION field .....	77
64 INSTRUCT COMPONENT DEVICE parameter list .....	77
65 REMOVE PERIPHERAL DEVICE/COMPONENT DEVICE service action .....	78
66 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action .....	79
67 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER parameter list .....	79
68 Service actions for REDUNDANCY GROUP (IN) command .....	80
69 REPORT BASIC REDUNDANCY GROUP service action .....	80
70 REPORT BASIC REDUNDANCY parameter list .....	81
71 REDUNDANCY GROUP METHODS .....	82
72 REDUNDANCY GROUP PERIPHERAL DEVICE DESCRIPTOR .....	82
73 REPORT REDUNDANCY GROUPS service action .....	83
74 REPORT REDUNDANCY GROUPS parameter list .....	84
75 Format of REPORT REDUNDANCY GROUP DESCRIPTOR .....	85
76 GRANULARITY OF UNITS .....	85
77 REDUNDANCY GROUP P_EXTENT DESCRIPTOR .....	86
78 REPORT UNASSIGNED REDUNDANCY GROUP SPACE service action .....	87
79 REPORT UNASSIGNED REDUNDANCY GROUP SPACE parameter list .....	88
80 Format of REPORT UNASSIGNED REDUNDANCY GROUP SPACE DESCRIPTOR .....	89
81 Data format of PS_EXTENT DESCRIPTOR .....	90
82 Service actions for REDUNDANCY GROUP (OUT) command .....	91
83 CONTROL GENERATION OF CHECK DATA service action .....	91
84 CREATE/MODIFY BASIC REDUNDANCY GROUP service action .....	93
85 Minimum redundancy group protection .....	93
86 CONFIGURE .....	94
87 CREATE/MODIFY .....	95
88 CREATE/MODIFY BASIC REDUNDANCY GROUP parameter list .....	96
89 Data format of CREATE/MODIFY PERIPHERAL DEVICE DESCRIPTOR .....	97
90 CREATE/MODIFY REDUNDANCY GROUP service action .....	98
91 CREATE/MODIFY .....	99
92 CREATE/MODIFY REDUNDANCY GROUP parameter list .....	99
93 Data format of CREATE/MODIFY P_EXTENT DESCRIPTOR .....	100
94 DELETE REDUNDANCY GROUP service action .....	102
95 REBUILD P_EXTENT service action .....	103
96 Rebuild types .....	104
97 REBUILD P_EXTENT parameter list .....	105
98 REBUILD PERIPHERAL DEVICE service action .....	106
99 Rebuild types .....	107
100 REBUILD PERIPHERAL DEVICE parameter list .....	108
101 RECALCULATE CHECK DATA service action .....	109
102 VERIFY CHECK DATA service action .....	110
103 Service actions for volume set (in) command .....	112
104 REPORT BASIC VOLUME SET service action .....	112
105 REPORT BASIC VOLUME SET parameter list .....	113
106 REPORT BASIC VOLUME SET PERIPHERAL DEVICE DESCRIPTOR .....	114
107 REPORT STORAGE ARRAY CONFIGURATION service action .....	115
108 REPORT CONFIGURATION parameter list .....	116
109 Rebuild/recalculate priority selection .....	117
110 PERCENTAGE OF SEQUENTIAL READ TRANSFERS .....	117
111 PERCENTAGE OF SEQUENTIAL WRITE TRANSFERS .....	118
112 VOLUME SET PERIPHERAL DEVICE DESCRIPTOR .....	118
113 REPORT UNASSIGNED VOLUME SETS service action .....	119
114 REPORT UNASSIGNED VOLUME SETS parameter list .....	119
115 Format of REPORT UNASSIGNED VOLUME SET DESCRIPTOR .....	120
116 REPORT VOLUME SETS service action .....	120
117 REPORT VOLUME SETS parameter list .....	121
118 Format of REPORT VOLUME SET DESCRIPTOR .....	122
119 VOLUME SET PS_EXTENT DESCRIPTOR .....	123

120	Service actions for VOLUME SET (OUT) command .....	124
121	ASSIGN LUN_V service action .....	125
122	ENABLE RANGE .....	125
123	IDENTIFIER parameter list .....	126
124	CONTROL GENERATION OF CHECK DATA service action .....	126
125	CONTROL WRITE OPERATIONS service action .....	128
126	CREATE/MODIFY BASIC VOLUME SET service action .....	129
127	CONFIGURE .....	130
128	CREATE/MODIFY .....	130
129	CREATE/MODIFY BASIC VOLUME SET parameter list .....	131
130	Data format of basic Volume set peripheral device descriptor .....	132
131	CREATE/MODIFY STORAGE ARRAY CONFIGURATION service action .....	133
132	CONFIGURE .....	134
133	CREATE/MODIFY .....	135
134	CREATE/MODIFY STORAGE ARRAY CONFIGURATION parameter list .....	136
135	Rebuild/recalculate priority selection .....	137
136	PERCENTAGE OF SEQUENTIAL READ TRANSFERS .....	137
137	PERCENTAGE OF SEQUENTIAL WRITE TRANSFERS .....	138
138	Data format of CREATE/MODIFY PERIPHERAL DEVICE DESCRIPTOR .....	138
139	CREATE/MODIFY VOLUME SET service action .....	139
140	CREATE/MODIFY .....	140
141	CREATE/MODIFY VOLUME SET parameter list .....	141
142	Data format of CREATE/MODIFY PS_EXTENT DESCRIPTOR .....	142
143	DEASSIGN LUN_V service action .....	143
144	DELETE VOLUME SET service action .....	144
145	RECALCULATE VOLUME SET CHECK DATA service action .....	145
146	RECALCULATE VOLUME SET CHECK DATA parameter list .....	146
147	VERIFY VOLUME SET CHECK DATA service action .....	147
148	VERIFY RANGE .....	147
149	VERIFY VOLUME SET CHECK DATA parameter list .....	148
150	Service actions for SPARE (IN) command .....	149
151	REPORT P_EXTENT SPARE service action .....	149
152	REPORT P_EXTENT SPARE parameter list .....	150
153	Format of REPORT P_EXTENT SPARE DESCRIPTOR .....	151
154	REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action .....	152
155	REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE parameter list .....	153
156	Format of REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE DESCRIPTOR .....	154
157	Data format of covered LOGICAL UNIT DESCRIPTOR .....	155
158	LOGICAL UNIT TYPES .....	155
159	Service actions for spare (out) command .....	155
160	CREATE/MODIFY P_EXTENT SPARE service action .....	156
161	COVER .....	157
162	CREATE/MODIFY .....	157
163	CREATE/MODIFY P_EXTENT SPARE parameter list .....	158
164	CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action .....	159
165	COVER .....	160
166	CREATE/MODIFY .....	161
167	CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE parameter list .....	161
168	DELETE SPARE service action .....	162
169	Mode page codes .....	163
170	LUN mapping page .....	164
A.1	IDENTIFY message format .....	165
D.1	User data stripe depth mapping selection .....	175
D.2	Rebuild priority selection .....	176
D.3	Read ahead selection .....	177



## Figures

	Page
1 SCSI document road map .....	xii
2 Protocol conversion layer .....	8
3 SACL conversion layer .....	9
4 Typical system diagram .....	10
5 Branch of generic layers .....	11
6 Software SACL with a branch of SCSI disks .....	12
7 Branch with HBA SACL .....	13
8 Branch with bridge controller SACL .....	14
9 Branch with SACLs in multiple layers .....	15
10 Single redundancy group .....	25
11 Multiple volume sets associated with a single redundancy group .....	25
12 Redundancy group check data mapping flow chart .....	27
13 Multiple redundancy groups .....	30
14 Single volume set associated with multiple redundancy groups .....	31
15 Volume set user data mapping flow chart (part 1) .....	32
16 Volume set user data mapping flow chart (part 2) .....	33
17 Volume set user data mapping flow .....	34
C.1 P+S redundancy mapping example .....	170
C.2 XOR redundancy mapping example (RAID 5) .....	171
C.3 User data mapping for a RAID 5 configuration (nochkskip = 1) .....	172
C.4 User data mapping for a RAID 5 configuration (nochkskip = 0) .....	173
C.5 User data mapping for a RAID 3 configuration .....	174
D.1 Mapping of user data in volume set example .....	178

## Foreword

ISO (the International Organization of Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of international standard through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO/IEC 14776-342 was prepared by Joint Technical Committee ISO/IEC JTC 1, Subcommittee SC 25, Interconnection of information technology equipment.

## Introduction

The SCSI command set is designed to provide efficient peer-to-peer operation of input/output devices (disks, tapes, printers, etc.) by an operating system. The SCSI command set assumes a command-response protocol. Action on SCSI commands shall not be deemed completed until a response is received. The response shall include a status that indicates the final disposition of the command.

The SCSI command set provides multiple operating systems concurrent control over one or more input/output devices. However, the multiple operating systems should properly coordinate their actions or data corruption will result. This standard defines commands that assist with coordination between multiple operating systems. However, details of the coordination are beyond the scope of the SCSI command set.

This standard defines a device model for SCSI storage arrays, commonly known as RAID devices. This standard defines the SCSI commands that may apply to SCSI storage arrays and the SCSI commands that are uniquely for SCSI storage arrays.

This standard is intended to be the choice for new designs over the original SCSI-3 Controller Commands (SCC) standard. Several new high level service actions have been added to this standard that simplify configurations.

The SCSI Controller Commands-2 (SCC-2) standard is divided into six clauses:

- Clause 1 is the scope;
- Clause 2 enumerates the normative references that apply to this standard;
- Clause 3 describes the definitions, symbols and abbreviations used in this standard;
- Clause 4 describes the conceptual relationship between this document and the SCSI-3 Architecture Model;
- Clause 5 describes the command model for SCSI storage array devices;
- Clause 6 defines the commands and parameter data that may be implemented by an SCSI storage array device.

The annexes provide information to assist with implementation of the SCSI Controller Commands-2 standard. Annex A is normative and is considered part of this standard. Annexes B, C, and D are for information only.

Figure 1 is intended to show the general relationship between SCSI standards. The figure is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture.

**CAUTION:** The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this International Standard may involve the use of patents concerning SCC-2.

The ISO and IEC take no position concerning the evidence, validity and scope of the patent rights. The holder of the patent rights has assured the ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of the patent rights is registered with the ISO and IEC. Information may be obtained from:

IBM Corporation  
Intellectual Property Licensing  
5600 Cottle Road  
San Jose, CA 95153

Attention is drawn to the possibility that some of the elements of this International Standard may be the

subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

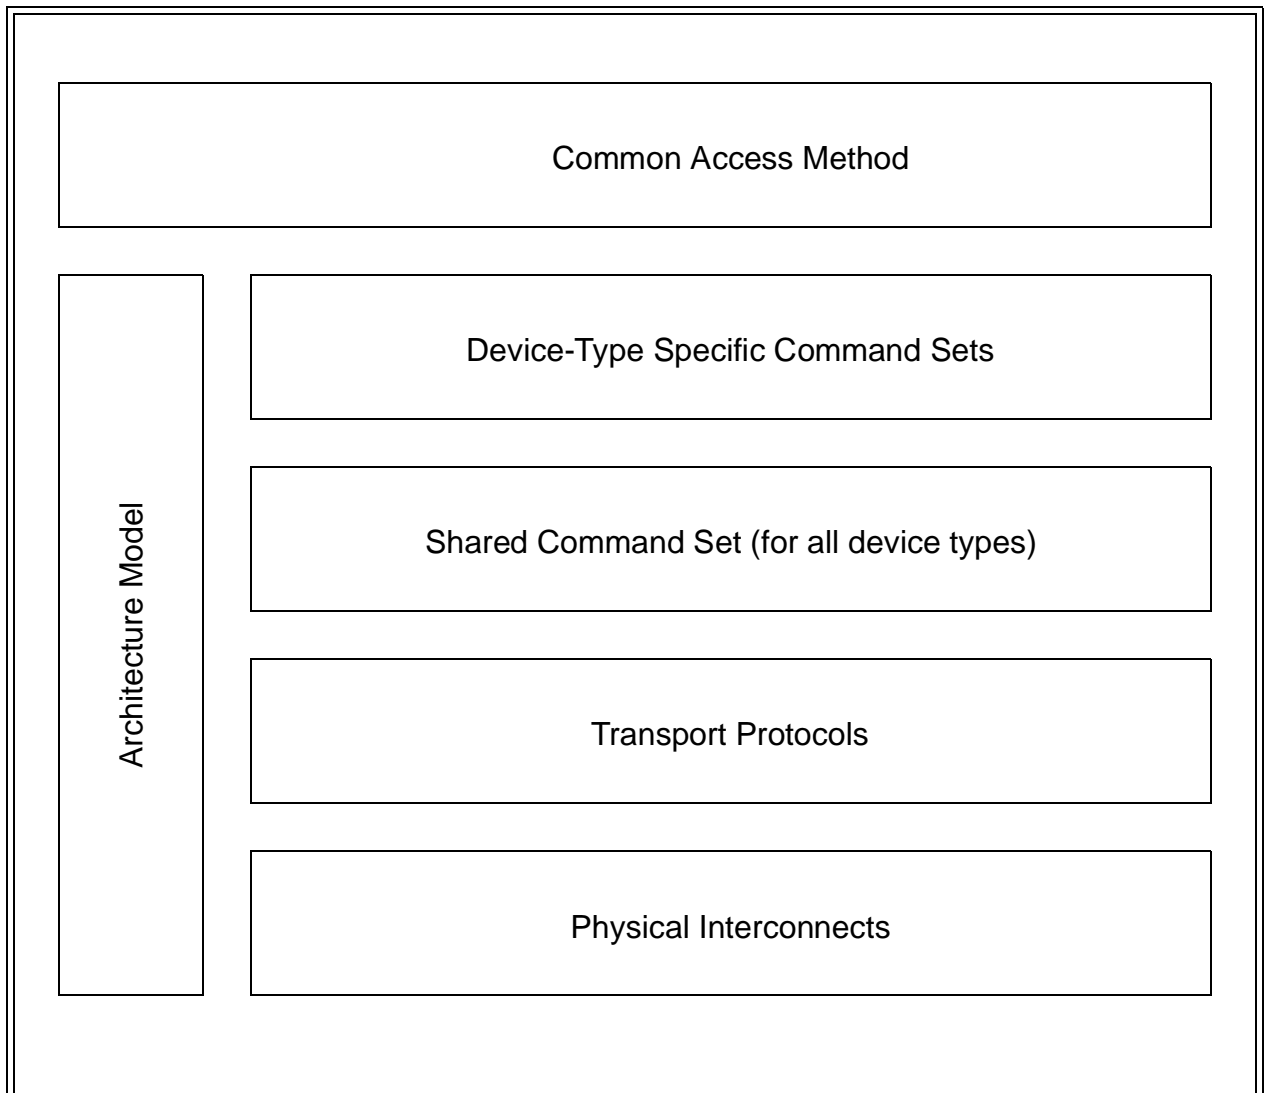


Figure 1 - SCSI document road map



# Information technology – Small Computer System Interface – Part 342: Controller Commands-2 (SCC-2)

## 1 Scope

This International Standard defines the command set extensions for SCSI storage array devices; commonly known as RAID devices. This standard is principally intended to be used in conjunction with, not as an alternate to, any of the SCSI command standards nor to the SCSI-3 Architecture Model (ISO/IEC 14776-411) standard. This international standard is intended as an alternate to the SCSI-3 Controller Command (ISO/IEC 14776-341) standard. The resulting commands facilitate the control and configuration of SCSI storage arrays and thus provide a common command specification for both system integrators and suppliers of SCSI storage array devices.

This international standard contains all the information defined in SCSI-3 Controller Command (ISO/IEC 14776-341) standard. In addition this international standard specifies new commands and an expanded model clause.

The clause(s) of this standard pertaining to the SCSI storage array device class, implemented in conjunction with the applicable clauses within any of the SCSI command standards, shall specify the standard command set available for SCSI storage arrays.

The objective of the SCSI Controller Commands is to provide the following:

- a) Transfer commands unique to SCSI Controller Command devices;
- b) Control commands to manage the operation of an SCSI Controller Command device;
- c) Optional device mapping and pass-through support.

## 2 Normative references

The following standards contain provisions which, through reference in the text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

Members of IEC and ISO maintain registers of currently valid standards.

Parts of ISO/IEC 14776:

- SCSI-3 Architecture Model (ISO/IEC 14776-411)
- SCSI-3 Primary Commands (ISO/IEC 14776-311)
- SCSI-3 Interlocked Protocol (ISO/IEC 14776-211)