This is a preview - click here to buy the full publication

STANDARD

ISO/IEC 19505-2

First edition 2012-04-15

Information technology — Object Management Group Unified Modeling Language (OMG UML) —

Part 2: **Superstructure**

Technologies de l'information — Langage de modélisation unifié OMG (OMG UML) —

Partie 2: Superstructure



ISO/IEC 19505-2:2012(E) This is a pr

This is a preview - click here to buy the full publication



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Table of Contents

1.	Scop	oe	1
2.	Conf	ormance	1
	2.1	Language Units	2
	2.2	Compliance Levels	2
	2.3	Meaning and Types of Compliance	6
	2.4	Compliance Level Contents	8
3.	Norm	native References	9
4.	Term	s and Definitions	10
5.	Notat	tional Conventions	10
	5.1	Keywords for Requirement Statements	10
	5.2	Annotations on Example Diagrams	10
6.	Addit	tional Information	
	6.1	Architectural Alignment and MDA Support	
	6.2		
		6.2.1 The Basic Premises	
		6.2.2 The Semantics Architecture	
		6.2.4 Semantics Descriptions in the Specification	
	6.3		
		6.3.1 Models and What They Model	
	6.4	How to Read this Proceed	15
		6.4.1 Specification format	
		6.4.2 Diagram format 6.4.3 Contents of Subparts	
Su	bpart	l - Supplement	23
7.	Class	ses	25
	7.1	Overview	

7.2	Abstract Syntax	26
7.3	Class Descriptions	39
	7.3.1 Abstraction (from Dependencies)	
	7.3.2 AggregationKind (from Kernel)	
	7.3.3 Association (from Kernel)	
	7.3.4 AssociationClass (from AssociationClasses)	
	7.3.5 BehavioralFeature (from Kernel)	
	7.3.6 BehavioredClassifier (from Interfaces)	
	7.3.7 Class (from Kernel)	
	7.3.8 Classifier (from Kernel, Dependencies, PowerTypes, Interfaces)	
	7.3.9 Comment (from Kernel)	
	7.3.10 Constraint (from Kernel)	
	7.3.11 DataType (from Kernel)	
	7.3.12 Dependency (from Dependencies)	
	7.3.13 DirectedRelationship (from Kernel)	
	7.3.14 Element (from Kernel)	
	7.3.15 ElementImport (from Kernel)	
	7.3.16 Enumeration (from Kernel)	
	7.3.17 EnumerationLiteral (from Kernel)	
	7.3.18 Expression (from Kernel)	
	7.3.19 Feature (from Kernel)	
	7.3.20 Generalization (from Kernel, PowerTypes)	75
	7.3.21 GeneralizationSet (from PowerTypes)	79
	7.3.22 InstanceSpecification (from Kernel)	87
	7.3.23 InstanceValue (from Kernel)	90
	7.3.24 Interface (from Interfaces)	91
	7.3.25 InterfaceRealization (from Interfaces)	94
	7.3.26 LiteralBoolean (from Kernel)	94
	7.3.27 LiteralInteger (from Kernel)	95
	7.3.28 LiteralNull (from Kernel)	96
	7.3.29 LiteralReal	
	7.3.30 LiteralSpecification (from Kernel)	98
	7.3.31 LiteralString (from Kernel)	
	7.3.32 LiteralUnlimitedNatural (from Kernel)	
	7.3.33 MultiplicityElement (from Kernel)	
	7.3.34 NamedElement (from Kernel, Dependencies)	
	7.3.35 Namespace (from Kernel)	
	7.3.36 OpaqueExpression (from Kernel)	
	7.3.37 Operation (from Kernel, Interfaces)	
	7.3.38 Package (from Kernel)	
	7.3.39 PackageableElement (from Kernel)	
	7.3.40 PackageImport (from Kernel)	
	7.3.41 PackageMerge (from Kernel)	
	7.3.42 Parameter (from Kernel)	
	7.3.43 Parameter Direction Kind (from Kernel)	
	7.3.44 PrimitiveType (from Kernel)	
	7.3.45 Property (from Kernel, AssociationClasses, Interfaces)	
	7.3.46 Realization (from Dependencies)	
	7.3.47 RedefinableElement (from Kernel)	
	7.3.48 Relationship (from Kernel)	139

		7.3.49 Slot (from Kernel)	
		7.3.50 StructuralFeature (from Kernel)	
		7.3.51 Substitution (from Dependencies)	
		7.3.52 Type (from Kernel)	
		7.3.53 TypedElement (from Kernel)	
		7.3.54 Usage (from Dependencies)	
		7.3.55 ValueSpecification (from Kernel)	
		7.3.56 VisibilityKind (from Kernel)	146
	7.4	Diagrams	147
8.	Com	oonents	151
	8.1	Overview	151
	8.2	Abstract Syntax	151
	8.3	Class Descriptions	155
		8.3.1 Component (from BasicComponents, PackagingComponents)	155
		8.3.2 ComponentRealization (from BasicComponents)	164
		8.3.3 ConnectableElement (from BasicComponents)	
		8.3.4 Connector (from BasicComponents)	
		8.3.5 ConnectorEnd (from BasicComponents)	
		8.3.6 ConnectorKind (from BasicComponents)	
	8.4	Diagrams	170
9.	Com	oosite Structures	173
	9.1	Overview	173
	9.2	Abstract Syntax	173
	9.3	Class Descriptions	178
		9.3.1 Class (from StructuredClasses, InternalStructures)	178
		0.2.2 Classifier (from Internal Structures, Callaborations)	170
		9.3.2 Classifier (from InternalStructures, Collaborations)	170
		9.3.3 Collaboration (from Collaborations)	
		9.3.3 Collaboration (from Collaborations)	180 183
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures)	180 183 186
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations) 9.3.12 Port (from Ports)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures, Ports) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations) 9.3.12 Port (from Ports) 9.3.13 Property (from InternalStructures)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures, Ports) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations) 9.3.12 Port (from Ports) 9.3.13 Property (from InternalStructures) 9.3.14 StructuredClassifier (from InternalStructures)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures, Ports) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations) 9.3.12 Port (from Ports) 9.3.13 Property (from InternalStructures) 9.3.14 StructuredClassifier (from InternalStructures) 9.3.15 Trigger (from InvocationActions)	
		9.3.3 Collaboration (from Collaborations) 9.3.4 CollaborationUse (from Collaborations) 9.3.5 ConnectableElement (from InternalStructures) 9.3.6 Connector (from InternalStructures, Ports) 9.3.7 ConnectorEnd (from InternalStructures, Ports) 9.3.8 EncapsulatedClassifier (from Ports) 9.3.9 Feature (from InternalStructures) 9.3.10 InvocationAction (from InvocationActions) 9.3.11 Parameter (from Collaborations) 9.3.12 Port (from Ports) 9.3.13 Property (from InternalStructures) 9.3.14 StructuredClassifier (from InternalStructures)	

10.	Deployments	205
	10.1 Overview	205
	10.2 Abstract Syntax	205
	10.3 Class Descriptions	209
	10.3.1 Artifact (from Artifacts, Nodes)	
	10.3.2 CommunicationPath (from Nodes)	
	10.3.3 DeployedArtifact (from Nodes)	
	10.3.4 Deployment (from ComponentDeployments, Nodes)	
	10.3.5 DeploymentSpecification (from ComponentDeployments)	
	10.3.6 DeploymentTarget (from Nodes)	217
	10.3.7 Device (from Nodes)	
	10.3.8 ExecutionEnvironment (from Nodes)	
	10.3.9 InstanceSpecification (from Nodes)	
	10.3.10 Manifestation (from Artifacts)	
	10.3.11 Node (from Nodes)	
	10.3.12 Property (from Nodes)	224
	10.4 Diagrams	
Su	bpart II - Behavior	229
	-	
11.	Actions	231
	11.1 Overview	231
	11.2 Abstract Syntax	233
	11.3 Class Descriptions	247
	11.3.1 AcceptCallAction (from CompleteActions)	247
	11.3.2 AcceptEventAction (from CompleteActions)	
	11.3.3 Action (from BasicActions)	
	11.3.4 ActionInputPin (from StructuredActions)	
	11.3.5 AddStructuralFeatureValueAction (from IntermediateActions)	
	11.3.6 AddVariableValueAction (from StructuredActions)	
	11.3.7 BroadcastSignalAction (from IntermediateActions)	255
	11.3.8 CallAction (from BasicActions)	
	11.3.9 CallBehaviorAction (from BasicActions)	
	11.3.10 CallOperationAction (from BasicActions)	
	11.3.11 ClearAssociationAction (from IntermediateActions)	
	11.3.12 ClearStructuralFeatureAction (from IntermediateActions)	
	11.3.13 ClearVariableAction (from StructuredActions)	
	11.3.14 CreateLinkAction (from IntermediateActions)	
	11.3.15 CreateLinkObjectAction (from CompleteActions)	
	11.3.16 CreateObjectAction (from IntermediateActions)	
	11.3.17 Destroy/Chicat Action (from Intermediate Actions)	
	11.3.18 DestroyObjectAction (from IntermediateActions)	
	11.3.19 InputPin (from BasicActions)	
	11.3.21 LinkAction (from IntermediateActions)	
	11.5.21 LIIIAACIOII (IIOIII IIICEIIIICUIAICACIOIIS)	270

	11.3.22 LinkEndCreationData (trom IntermediateActions)	
	11.3.23 LinkEndData (from IntermediateActions, CompleteActions)	273
	11.3.24 LinkEndDestructionData (from IntermediateActions)	
	11.3.25 MultiplicityElement (from BasicActions)	276
	11.3.26 OpaqueAction (from BasicActions)	276
	11.3.27 OutputPin (from BasicActions)	277
	11.3.28 Pin (from BasicActions)	
	11.3.29 QualifierValue (from CompleteActions)	278
	11.3.30 RaiseExceptionAction (from StructuredActions)	279
	11.3.31 ReadExtentAction (from CompleteActions)	
	11.3.32 ReadIsClassifiedObjectAction (from CompleteActions)	281
	11.3.33 ReadLinkAction (from IntermediateActions)	
	11.3.34 ReadLinkObjectEndAction (from CompleteActions)	
	11.3.35 ReadLinkObjectEndQualifierAction (from CompleteActions)	285
	11.3.36 ReadSelfAction (from IntermediateActions)	
	11.3.37 ReadStructuralFeatureAction (from IntermediateActions)	288
	11.3.38 ReadVariableAction (from StructuredActions)	289
	11.3.39 ReclassifyObjectAction (from CompleteActions)	290
	11.3.40 ReduceAction (from CompleteActions)	291
	11.3.41 RemoveStructuralFeatureValueAction (from IntermediateActions)	292
	11.3.42 RemoveVariableValueAction (from StructuredActions)	294
	11.3.43 ReplyAction (from CompleteActions)	
	11.3.44 SendObjectAction (from IntermediateActions)	296
	11.3.45 SendSignalAction (from BasicActions)	
	11.3.46 StartClassifierBehaviorAction (from CompleteActions)	
	11.3.47 StartObjectBehaviorAction (from CompleteActions)	
	11.3.48 StructuralFeatureAction (from IntermediateActions)	
	11.3.49 TestIdentityAction (from IntermediateActions)	
	11.3.50 UnmarshallAction (from CompleteActions)	
	11.3.51 ValuePin (from BasicActions)	
	11.3.52 ValueSpecificationAction (from IntermediateActions)	
	11.3.53 VariableAction (from StructuredActions)	
	11.3.54 WriteLinkAction (from IntermediateActions)	
	11.3.55 WriteStructuralFeatureAction (from IntermediateActions)	
	11.3.56 WriteVariableAction (from StructuredActions)	308
	11.4 Diagrams	309
12.	Activities	311
	12.1 Overview	311
	12.2 Abstract Syntax	313
	12.3 Class Descriptions	325
	12.3.1 AcceptEventAction (as specialized)	325
	12.3.2 Action (from CompleteActivities, FundamentalActivities, StructuredActivities,	
	CompleteStructuredActivities)	327
	12.3.3 ActionInputPin (as specialized)	
	12.3.4 Activity (from BasicActivities, CompleteActivities, FundamentalActivities,	
	StructuredActivities)	332
	·	

12.3.5 ActivityEdge (from BasicActivities, CompleteAc	
IntermediateActivities)	
12.3.6 ActivityFinalNode (from BasicActivities, Intermediate)	
12.3.7 ActivityGroup (from BasicActivities, Fundamen	
StructuredActivities, CompleteActivities, Com	
12.3.8 ActivityNode (from BasicActivities, CompleteA	ctivities, FundamentalActivities,
IntermediateActivities, CompleteStructuredAc	
12.3.9 ActivityParameterNode (from BasicActivities) .	
12.3.10 ActivityPartition (from IntermediateActivities)	
12.3.11 AddVariableValueAction (as specialized)	
12.3.12 Behavior (from CompleteActivities)	
12.3.13 BehavioralFeature (from CompleteActivities)	
12.3.14 CallBehaviorAction (as specialized)	
12.3.15 CallOperationAction (as specialized)	
12.3.16 CentralBufferNode (from IntermediateActivitie	es)
12.3.17 Clause (from CompleteStructuredActivities, S	tructuredActivities)
12.3.18 ConditionalNode (from CompleteStructuredA	ctivities, StructuredActivities) 371
12.3.19 ControlFlow (from BasicActivities)	
12.3.20 ControlNode (from BasicActivities)	
12.3.21 DataStoreNode (from CompleteActivities)	
12.3.22 DecisionNode (from IntermediateActivities)	
12.3.23 ExceptionHandler (from ExtraStructuredActivi	
12.3.24 ExecutableNode (from ExtraStructuredActiviti	
12.3.25 ExpansionKind (from ExtraStructuredActivities	s)385
12.3.26 ExpansionNode (from ExtraStructuredActivities)	es)
12.3.27 ExpansionRegion (from ExtraStructuredActivi	ties) 386
12.3.28 FinalNode (from IntermediateActivities)	
12.3.29 FlowFinalNode (from IntermediateActivities) .	
12.3.30 ForkNode (from IntermediateActivities)	
12.3.31 InitialNode (from BasicActivities)	
12.3.32 InputPin (from CompleteStructuredActivities)	398
12.3.33 InterruptibleActivityRegion (from CompleteActivityRegion)	tivities) 399
12.3.34 JoinNode (from CompleteActivities, Intermedi	
12.3.35 LoopNode (from CompleteStructuredActivities	
12.3.36 MergeNode (from IntermediateActivities)	406
12.3.37 ObjectFlow (from BasicActivities, CompleteAc	
12.3.38 ObjectNode (from BasicActivities, CompleteA	ctivities) 413
12.3.39 ObjectNodeOrderingKind (from CompleteActi	,
12.3.40 OutputPin (from CompleteStructuredActivities	
12.3.41 Parameter (from CompleteActivities)	
12.3.42 ParameterEffectKind (from CompleteActivities	
12.3.43 ParameterSet (from CompleteActivities)	
12.3.44 Pin (from BasicActivities, CompleteActivities)	421
12.3.45 SendObjectAction (as specialized)	
12.3.46 SendSignalAction (as specialized)	
12.3.47 SequenceNode (from StructuredActivities)	
12.3.48 StructuredActivityNode (from CompleteStruct	uredActivities, StructuredActivities) 431
12.3.49 UnmarshallAction (as specialized)	
12.3.50 ValuePin (as specialized)	
12.3.51 ValueSpecificationAction (as specialized)	435
12.3.52 Variable (from StructuredActivities)	436

	12.4 Diagrams	438
13.	Common Behaviors	443
	13.1 Overview	443
	13.2 Abstract Syntax	447
	13.3 Class Descriptions	452
	13.3.1 AnyReceiveEvent (from Communications)	452
	13.3.2 Behavior (from BasicBehaviors)	
	13.3.3 BehavioralFeature (from BasicBehaviors, Communications)	
	13.3.4 BehavioredClassifier (from BasicBehaviors, Communications)	
	13.3.5 CallConcurrencyKind (from Communications)	458
	13.3.6 CallEvent (from Communications)	
	13.3.7 ChangeEvent (from Communications)	460
	13.3.8 Class (from Communications)	
	13.3.9 Duration (from SimpleTime)	
	13.3.10 DurationConstraint (from SimpleTime)	
	13.3.11 DurationInterval (from SimpleTime)	
	13.3.12 DurationObservation (from SimpleTime)	
	13.3.13 Event (from Communications)	
	13.3.14 FunctionBehavior (from BasicBehaviors)	
	13.3.15 Interface (from Communications)	
	13.3.16 Interval (from SimpleTime)	
	13.3.17 IntervalConstraint (from SimpleTime)	
	13.3.18 MessageEvent (from Communications)	
	13.3.19 Observation (from SimpleTime)	
	13.3.20 OpaqueBehavior (from BasicBehaviors)	
	13.3.21 OpaqueExpression (from BasicBehaviors)	
	13.3.22 Operation (from Communications)	
	13.3.23 Reception (from Communications)	
	13.3.24 Signal (from Communications)	
	13.3.26 TimeConstraint (from SimpleTime)	
	13.3.27 TimeEvent (from SimpleTime)	
	13.3.28 TimeExpression (from SimpleTime)	
	13.3.29 TimeExpression (from SimpleTime)	
	13.3.30 TimeObservation (from SimpleTime)	
	13.3.31 Trigger (from Communications)	
14.	Interactions	481
	14.1 Overview	
	14.2 Abstract Syntax	
	14.3 Class Descriptions	
	14.3.1 ActionExecutionSpecification (from BasicInteractions)	
	14.3.2 BehaviorExecutionSpecification (from BasicInteractions)	
	14.3.3 CombinedFragment (from Fragments)	490
	14.3.4 ConsiderIgnoreFragment (from Fragments)	495

	14.3.5 Continuation (from Fragments)	
	14.3.6 DestructionOccurrenceSpecification(from BasicInteractions)	
	14.3.7 ExecutionOccurrenceSpecification (from BasicInteractions)	
	14.3.8 ExecutionSpecification (from BasicInteractions)	
	14.3.9 Gate (from Fragments)	
	14.3.10 GeneralOrdering (from BasicInteractions)	
	14.3.11 Interaction (from BasicInteraction, Fragments)	
	14.3.12 InteractionConstraint (from Fragments)	
	14.3.13 InteractionFragment (from BasicInteractions, Fragments)	
	14.3.14 InteractionOperand (from Fragments)	
	14.3.15 InteractionOperatorKind (from Fragments)	
	14.3.16 InteractionUse (from Fragments)	
	14.3.17 Lifeline (from BasicInteractions, Fragments)	
	14.3.18 Message (from BasicInteractions)	
	14.3.19 MessageEnd (from BasicInteractions)	
	14.3.20 MessageKind (from BasicInteractions)	
	14.3.21 MessageOccurrenceSpecification (from BasicInteractions)	
	14.3.22 MessageSort (from BasicInteractions)	
	14.3.23 OccurrenceSpecification (from BasicInteractions)	
	14.3.24 PartDecomposition (from Fragments)	
	14.3.25 StateInvariant (from BasicInteractions)	
	14.4 Diagrams	523
15.	State Machines	543
	15.1 Overview	543
	15.2 Abstract Syntax	
	15.3 Class Descriptions	546
	15.3.1 ConnectionPointReference (from BehaviorStateMachines)	546
	15.3.2 FinalState (from BehaviorStateMachines)	
	15.3.3 Interface (from ProtocolStateMachines)	
	15.3.4 Port (from ProtocolStateMachines)	
	15.3.5 ProtocolConformance (from ProtocolStateMachines)	551
	15.3.6 ProtocolStateMachine (from ProtocolStateMachines)	EEO
	10.0.0 1 10.00010tateMaonine (nontri 10.00010tateMaonine)	ວວ∠
	15.3.7 ProtocolTransition (from ProtocolStateMachines)	
		554
	15.3.7 ProtocolTransition (from ProtocolStateMachines)	554 557
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines)	554 557 564 565
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines)	
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines)	
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines)	554 557 564 565 567 581
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines) 15.3.14 Transition (from BehaviorStateMachines)	
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines) 15.3.14 Transition (from BehaviorStateMachines) 15.3.15 TransitionKind (from BehaviorStateMachines)	554 557 564 565 567 581 588 589
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines) 15.3.14 Transition (from BehaviorStateMachines)	554 557 564 565 567 581 588 589
	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines) 15.3.14 Transition (from BehaviorStateMachines) 15.3.15 TransitionKind (from BehaviorStateMachines)	554 557 564 565 567 581 588 589 597
16.	15.3.7 ProtocolTransition (from ProtocolStateMachines) 15.3.8 Pseudostate (from BehaviorStateMachines) 15.3.9 PseudostateKind (from BehaviorStateMachines) 15.3.10 Region (from BehaviorStateMachines) 15.3.11 State (from BehaviorStateMachines, ProtocolStateMachines) 15.3.12 StateMachine (from BehaviorStateMachines) 15.3.13 TimeEvent (from BehaviorStateMachines) 15.3.14 Transition (from BehaviorStateMachines) 15.3.15 TransitionKind (from BehaviorStateMachines)	554 557 564 565 567 581 588 589 597 600

16.1 Overview	605
16.2 Abstract Syntax	605
16.3 Class Descriptions	606
16.3.1 Actor (from UseCases)	
16.3.2 Classifier (from UseCases)	
16.3.3 Extend (from UseCases)	
16.3.4 ExtensionPoint (from UseCases)	
16.3.5 Include (from UseCases)	
16.3.6 UseCase (from UseCases)	
16.4 Diagrams	619
Subpart III - Supplement	625
17. Auxiliary Constructs	627
17.1 Overview	
17.2 InformationFlows	
17.2.1 InformationFlow (from InformationFlows)	
17.2.2 InformationItem (from InformationFlows)	
17.3 Models	
17.3.1 Model (from Models)	
17.4 Templates	
17.4.1 ParameterableElement (from Templates)	
17.4.2 TemplateableElement (from Templates)	
17.4.3 TemplateBinding (from Templates)	
17.4.4 TemplateParameter (from Templates)	
17.4.5 TemplateParameterSubstitution (from Templates)	
17.4.6 TemplateSignature (from Templates)	
17.4.7 Classifier (from Templates)	646
17.4.8 ClassifierTemplateParameter (from Templates)	
17.4.9 RedefinableTemplateSignature (from Templates)	652
17.4.10 Package (from Templates)	
17.4.11 PackageableElement (from Templates)	655
17.4.12 NamedElement (from Templates)	
17.4.13 StringExpression (from Templates)	
17.4.14 Operation (from Templates)	
17.4.15 Operation (from Templates)	
17.4.16 OperationTemplateParameter (from Templates)	
17.4.17 ConnectableElement (from Templates)	
17.4.18 ConnectableElementTemplateParameter (from Templates)	
17.4.19 Property (from Templates)	
17.4.20 ValueSpecification (from Templates)	665
18. Profiles	667
18.1 Overview	

18.1.1 Positioning profiles versus metamodels, MOF and UML	
18.2 Abstract Syntax	
18.3 Class Descriptions	
18.3.1 Class (from Profiles)	
18.3.2 Extension (from Profiles)	
18.3.3 ExtensionEnd (from Profiles)	
18.3.4 Image (from Profiles)	
18.3.5 Package (from Profiles)	
18.3.7 Profile (from Profiles)	
18.3.8 ProfileApplication (from Profiles)	
18.3.9 Stereotype (from Profiles)	
18.4 Diagrams	
O beaut DV Assessed	007
Subpart IV - Annexes	697
Annex A: Diagrams	699
Annex B: Keywords	705
•	
Annex C: Standard Stereotypes	
Annex D: Component Profile Examples	719
Annex E: Tabular Notations	723
=:	20
Annex F: Classifiers Taxonomy	
	727
Annex F: Classifiers Taxonomy	727

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO/IEC 19505 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

This International Standard was prepared by Technical Committee ISO/IEC/TC JTC1, Information technology, in collaboration with the Object Management Group (OMG), following the submission and processing as a Publicly Available Specification (PAS) of the OMG Unified Modeling Language (UML) specification.

This International Standard is related to:

• ITU-T Recommendations X.901-904 | ISO/IEC 10746, the Reference Model of Open Distributed Processing (RM-ODP).

This International Standard consists of the following parts, under the general title *Information technology - Open distributed processing - UML specification*:

- Part 1: Infrastructure
- Part 2: Superstructure

Apart from this Foreword, the text of this International Standard is identical with that for the OMG specification for UML, v2.4.1, Part 2.

Introduction

The rapid growth of distributed processing has led to a need for a coordinating framework for this standardization and ITU-T Recommendations X.901-904 | ISO/IEC 10746, the Reference Model of Open Distributed Processing (RM-ODP) provides such a framework. It defines an architecture within which support of distribution, interoperability, and portability can be integrated.

RM-ODP Part 2 (ISO/IEC 10746-2) defines the foundational concepts and modeling framework for describing distributed systems. The scopes and objectives of the RM-ODP Part 2 and the UML, while related, are not the same and, in a number of cases, the RM-ODP Part 2 and the UML specification use the same term for concepts that are related but not identical (e.g., interface). Nevertheless, a specification using the Part 2 modeling concepts can be expressed using UML with appropriate extensions (using stereotypes, tags, and constraints).

RM-ODP Part 3 (ISO/IEC 10746-3) specifies a generic architecture of open distributed systems, expressed using the foundational concepts and framework defined in Part 2. Given the relation between UML as a modeling language and Part 2 of the RM ODP standard, it is easy to show that UML is suitable as a notation for the individual viewpoint specifications defined by the RM-ODP.

The Unified Modeling Language (UML) is a general-purpose modeling language with a semantic specification, a graphical notation, an interchange format, and a repository query interface. It is designed for use in object-oriented software applications, including those based on technologies recommended by the Object Management Group (OMG). As such, it serves a variety of purposes including, but not limited to, the following:

- a means for communicating requirements and design intent,
- a basis for implementation (including automated code generation),
- a reverse engineering and documentation facility.

As an international standard, the various components of UML provide a common foundation for model and metadata interchange:

- between software development tools,
- · between software developers, and
- between repositories and other object management facilities.

The existence of such a standard facilitates the communication between standardized UML environments and other environments.

While not limited to this context, the UML standard is closely related to work on the standardization of Open Distributed Processing (ODP).

Information technology - Object Management Group Unified Modeling Language (OMG UML), Superstructure

1 Scope

1.1 General

This International Standard defines the Unified Modeling Language (UML), revision 2. The objective of UML is to provide system architects, software engineers, and software developers with tools for analysis, design, and implementation of software-based systems as well as for modeling business and similar processes.

The initial versions of UML (UML 1) originated with three leading object-oriented methods (Booch, OMT, and OOSE), and incorporated a number of best practices from modeling language design, object-oriented programming, and architectural description languages. Relative to UML 1, this revision of UML has been enhanced with significantly more precise definitions of its abstract syntax rules and semantics, a more modular language structure, and a greatly improved capability for modeling large-scale systems.

One of the primary goals of UML is to advance the state of the industry by enabling object visual modeling tool interoperability. However, to enable meaningful exchange of model information between tools, agreement on semantics and notation is required. UML meets the following requirements:

- A formal definition of a common MOF-based metamodel that specifies the abstract syntax of the UML. The abstract syntax defines the set of UML modeling concepts, their attributes and their relationships, as well as the rules for combining these concepts to construct partial or complete UML models.
- A detailed explanation of the semantics of each UML modeling concept. The semantics define, in a technology-independent manner, how the UML concepts are to be realized by computers.
- A specification of the human-readable notation elements for representing the individual UML modeling concepts as
 well as rules for combining them into a variety of different diagram types corresponding to different aspects of
 modeled systems.
- A detailed definition of ways in which UML tools can be made compliant with this International Standard. This is supported (in a separate specification) with an XML-based specification of corresponding model interchange formats (XMI) that must be realized by compliant tools.

2 Conformance

2.1 General

UML is a language with a very broad scope that covers a large and diverse set of application domains. Not all of its modeling capabilities are necessarily useful in all domains or applications. This suggests that the language should be structured modularly, with the ability to select only those parts of the language that are of direct interest. On the other hand, an excess of this type of flexibility increases the likelihood that two different UML tools will be supporting different subsets of the language, leading to interchange problems between them. Consequently, the definition of compliance for UML requires a balance to be drawn between modularity and ease of interchange.

Experience with previous versions of UML has indicated that the ability to exchange models between tools is of paramount interest to a large community of users. For that reason, this International Standard defines a small number of *compliance levels* thereby increasing the likelihood that two or more compliant tools will support the same or compatible language subsets. However, in recognition of the need for flexibility in learning and using the language, UML also provides the concept of *language units*.

2.2 Language Units

The modeling concepts of UML are grouped into *language units*. A language unit consists of a collection of tightly-coupled modeling concepts that provide users with the power to represent aspects of the system under study according to a particular paradigm or formalism. For example, the State Machines language unit enables modelers to specify discrete event-driven behavior using a variant of the well-known statecharts formalism, while the Activities language unit provides for modeling behavior based on a workflow-like paradigm. From the user's perspective, this partitioning of UML means that they need only be concerned with those parts of the language that they consider necessary for their models. If those needs change over time, further language units can be added to the user's repertoire as required. Hence, a UML user does not have to know the full language to use it effectively.

In addition, most language units are partitioned into multiple increments, each adding more modeling capabilities to the previous ones. This fine-grained decomposition of UML serves to make the language easier to learn and use, but the individual segments within this structure do not represent separate compliance points. The latter strategy would lead to an excess of compliance points and result to the interoperability problems described above. Nevertheless, the groupings provided by language units and their increments do serve to simplify the definition of UML compliance as explained below.

2.3 Compliance Levels

The stratification of language units is used as the foundation for defining compliance in UML. Namely, the set of modeling concepts of UML is partitioned into horizontal layers of increasing capability called *compliance levels*. Compliance levels cut across the various language units, although some language units are only present in the upper levels. As their name suggests, each compliance level is a distinct compliance point.

For ease of model interchange, there are just four compliance levels defined for the whole of UML:

- Level 0 (L0). This compliance level is formally defined in the UML Infrastructure. It contains a single language unit that provides for modeling the kinds of class-based structures encountered in most popular object-oriented programming languages. As such, it provides an entry-level modeling capability. More importantly, it represents a low-cost common denominator that can serve as a basis for interoperability between different categories of modeling tools.
- Level 1 (L1). This level adds new language units and extends the capabilities provided by Level 0. Specifically, it adds language units for use cases, interactions, structures, actions, and activities.
- Level 2 (L2). This level extends the language units already provided in Level 1 and adds language units for deployment, state machine modeling, and profiles.
- Level 3 (L3). This level represents the complete UML. It extends the language units provided by Level 2 and adds new language units for modeling information flows, templates, and model packaging.

The contents of language units are defined by corresponding top-tier packages of the UML metamodel, while the contents of their various increments are defined by second-tier packages within language unit packages. Therefore, the contents of a compliance level are defined by the set of metamodel packages that belong to that level.

As noted, compliance levels build on supporting compliance levels. The principal mechanism used in this International Standard for achieving this is *package merge* (see "PackageMerge (from Kernel)" on page 118). Package merge allows modeling concepts defined at one level to be extended with new features. Most importantly, this is achieved *in the context of the same namespace*, which enables interchange of models at different levels of compliance as described in ""Meaning and Types of Compliance" on page 6.

For this reason, all compliance levels are ultimately merged into a single core "UML" model package that defines the common namespace shared by all the compliance levels. Level 0 is defined by the top-level metamodel shown in Figure 2.1. In this model, "L0" is originally an empty package that simply merges in the contents of the *Basic* package from the *UML Infrastructure*. This package is then merged into the UML model. Package L0 contains elementary concepts such as Class, Package, DataType, Operation, etc. merged in from *Basic* (see the *Unified Modeling Language: Infrastructure specification* for the complete list of contents of this package).




Figure 2.1 - Level 0 package diagram

At the next level (Level 1) the packages merged into Level 0 and their contents are extended with additional packages as shown in Figure 2.2 on page 4. Note that each of the four packages shown in the figure merges in additional packages that are not shown in the diagram. They are defined in the corresponding package diagrams in this Part of ISO/IEC 19505. Consequently, the set of language units that results from this model is more than is indicated by the top-level model in the diagram. The specific packages included at this level are listed in Table 2.3 on page 8.

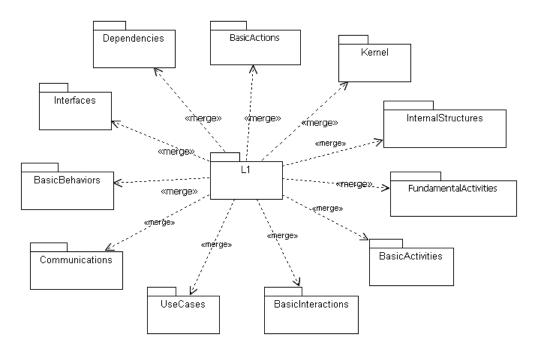


Figure 2.2 - Level 1 top-level package merges

Level 2 adds further language units and extensions to those provided by the Level 1. The actual language units and packages included at this level of compliance are listed in Table 2.4 on page 8.

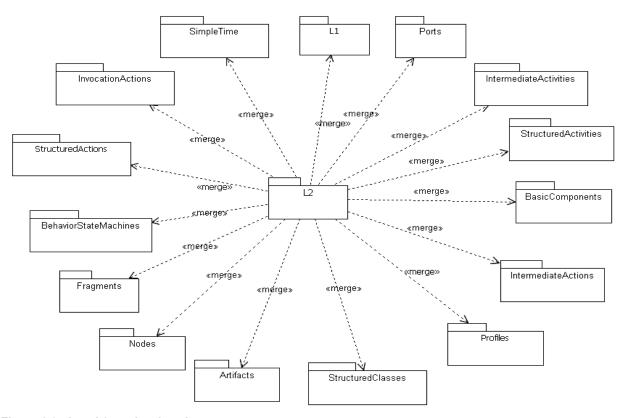


Figure 2.3 - Level 2 top-level package merges

Finally, Level3, incorporating the full UML definition, is shown in Figure 2.4 on page 6. Its contents are described in Table 2.5 on page 9.

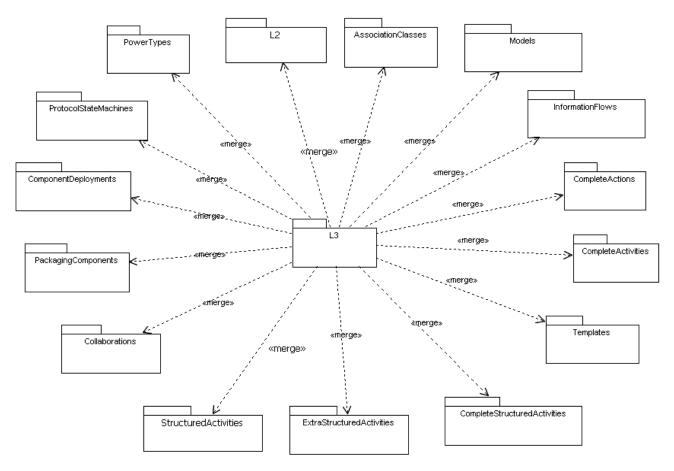


Figure 2.4 - Level 3 top-level package merges

2.4 Meaning and Types of Compliance

Compliance to a given level entails full realization of *all language units* that are defined for that compliance level. This also implies full realization of all language units in all the levels below that level. "Full realization" for a language unit at a given level means supporting the *complete set of modeling concepts* defined for that language unit *at that level*.

Thus, it is not meaningful to claim compliance to, say, Level 2 without also being compliant with the Level 0 and Level 1. A tool that is compliant at a given level must be able to import models from tools that are compliant to lower levels without loss of information.

There are two distinct types of compliance. They are:

- 1. Abstract syntax compliance. For a given compliance level, this entails:
 - compliance with the metaclasses, their structural relationships, and any constraints defined as part of the merged UML metamodel for that compliance level and,
 - the ability to output models and to read in models based on the XMI schema corresponding to that compliance level.

- 2. Concrete syntax compliance. For a given compliance level, this entails:
 - Compliance to the notation defined in the "Notation" sub clauses in this part of ISO/IEC 19505 for those metamodel elements that are defined as part of the merged metamodel for that compliance level and, by implication, the diagram types in which those elements may appear. And, optionally:
 - the ability to output diagrams and to read in diagrams based on the XMI schema defined by the Diagram Interchange specification for notation at that level. This option requires abstract syntax and concrete syntax compliance.

Concrete syntax compliance does not require compliance to any presentation options that are defined as part of the notation.

Compliance for a given level can be expressed as:

- abstract syntax compliance
- concrete syntax compliance
- abstract syntax with concrete syntax compliance
- abstract syntax with concrete syntax and diagram interchange compliance

Table 2.1 - Example compliance statement

Compliance Summary				
Compliance level	Abstract Syntax Concrete Syntax		Diagram Interchange Option	
Level 0	YES	YES	YES	
Level 1	YES	YES	NO	
Level 2	YES	NO	NO	

In case of tools that generate program code from models or those that are capable of executing models, it is also useful to understand the level of support for the run-time semantics described in the various "Semantics" sub clauses of the specification. However, the presence of numerous variation points in these semantics (and the fact that they are defined informally using natural language), make it impractical to define this as a formal compliance type, since the number of possible combinations is very large.

A similar situation exists with presentation options, since different implementors may make different choices on which ones to support. Finally, it is recognized that some implementors and profile designers may want to support only a subset of features from levels that are above their formal compliance level. (Note, however, that they can only claim compliance to the level that they fully support, even if they implement significant parts of the capabilities of higher levels.) Given this potential variability, it is useful to be able to specify clearly and efficiently, which capabilities are supported by a given implementation. To this end, in addition to a formal statement of compliance, implementors and profile designers may also provide informal *feature support statements*. These statements identify support for additional features in terms of language units and/or individual metamodel packages, as well as for less precisely defined dimensions such as presentation options and semantic variation points.

An example feature support statement is shown in Table 2.2 for an implementation whose compliance statement is given in Table 2.1. In this case, the implementation adds two new language units from higher levels.

Table 2.2 - Example feature support statement

Feature Support Statement					
Language Unit	Packages	Abstract Syntax	Concrete Syntax	Semantics	Presentation Options
Deployments	Deployments::Artifacts (L2) Deployments::Nodes (L2)	YES	YES	Note (4)	Note (5)
State Machines	StateMachines::BehaviorStateMachines (L2) StateMachines::ProtocolStateMachines (L3)	Note (1)	YES	Note (2)	Note (3)

Note (1): States and state machines are limited to a single region

Shallow history pseudostates not supported

Note (2): FIFO queueing in event pool

Note (3): Inherited elements indicated using grey-toned lines, etc.

2.5 Compliance Level Contents

Table 2.3 - Metamodel packages added in Level 1

Language Unit	Metamodel Packages
Actions	Actions::BasicActions
Activities	Activities::FundamentalActivities
	Activities::BasicActivities
Classes	Classes::Kernel
	Classes::Dependencies
	Classes::Interfaces
General Behavior	CommonBehaviors::BasicBehaviors
	CommonBehaviors::Communications
Structures	CompositeStructure::InternalStructures
Interactions	Interactions::BasicInteractions
UseCases	UseCases

Table 2.4 - Metamodel packages added in Level 2

Language Unit	Metamodel Packages
Actions	Actions::StructuredActions
	Actions::IntermediateActions
Activities	Activities::IntermediateActivities
	Activities::StructuredActivities
Components	Components::BasicComponents

Table 2.4 - Metamodel packages added in Level 2

Language Unit	Metamodel Packages
Deployments	Deployments::Artifacts
	Deployments::Nodes
General Behavior	CommonBehaviors::SimpleTime
Interactions	Interactions::Fragments
Profiles	AuxilliaryConstructs::Profiles
Structures	CompositeStructures::InvocationActions
	CompositeStructures::Ports
	CompositeStructures::StructuredClasses
State Machines	StateMachines::BehaviorStateMachines

Table 2.5 - Metamodel packages added in Level 3

Language Unit	Metamodel Packages
Action	Actions::CompleteActions
Activities	Activities::CompleteActivities
	Activities::CompleteStructuredActivities
	Activities::ExtraStructuredActivities
Classes	Classes::AssociationClasses
	Classes::PowerTypes
Components	Components::PackagingComponents
Deployments	Deployments::ComponentDeployments
Information Flows	AuxilliaryConstructs::InformationFlows
Models	AuxilliaryConstructs::Models
State Machines	StateMachines::ProtocolStateMachines
Structures	CompositeStructures::Collaborations
	CompositeStructures::StructuredActivities
Templates	AuxilliaryConstructs::Templates

3 Normative References

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 19505. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply.

• RFC2119, http://ietf.org/rfc/rfc2119, Key words for use in RFCs to Indicate Requirement Levels, S. Bradner, March 1997.

- ISO/IEC 19505-1, Information technology OMG Unified Modeling Language (OMG UML) Version 2.4.1 Part 1: Infrastructure (pas/2011-08-11)
- OMG Specification formal/2011-08-05, UML Infrastructure, v2.4.1
- OMG Specification formal/2010-02-01, Object Constraint Language, v2.2
- OMG Specification formal/2011-08-07, Meta Object Facility (MOF) Core, v2.4.1
- OMG Specification formal/2011-08-09, XML Metadata Interchange (XMI), v2.4.1
- OMG Specification formal/2006-04-04, UML 2.0 Diagram Interchange

Note – UML 2 is based on a different generation of MOF and XMI than that specified in ISO/IEC 19502:2005 Information technology - Meta Object Facility (MOF) and ISO/IEC 19503:2005 Information technology - XML Metadata Interchange (XMI) which are compatible with ISO/IEC 19501 UML version 1.4.1.