

INTERNATIONAL
STANDARD

ISO/IEC
24775-3

Second edition
2021-03

**Information technology — Storage
management —**

**Part 3:
Common profiles**



Reference number
ISO/IEC 24775-3:2021(E)

© ISO/IEC 2021



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by SNIA (as Storage Management Technical Specification, Part 3 Common Profiles, Version 1.8.0, Revision 5) and drafted in accordance with its editorial rules. It was adopted, under the JTC 1 PAS procedure, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

This second edition cancels and replaces the first edition (ISO/IEC 24775-3:2014), which has been technically revised.

The main changes compared to the previous edition are as follows:

- USAGE text was revised to address code (now included in the front matter for all SNIA specifications)
- All recipes and their references were deleted.
- Instances of subprofile were changed to profile. In the annex, instances of subprofile were changed to component profile (TSG meeting voice vote).
- Profile versions and related text were updated. (TSG meeting voice vote).
- Indications have been replaced by DMTF Indications, and all affected clauses updated. (TSG meeting voice vote).
- Instances of Experimental within profiles already labeled as Experimental were removed to avoid confusion and redundancy. (Editorial change)
- CIM/XML was changed to CIM-XML (Response to ballot comments).

- Annex: SMI-S Information Model.
- The CIM schema version was changed to 2.51 for V1.8.0 Rev3.
- Multiple profiles (TSG-SMIS-SCR00315.001):
 - Promoted the maturity level from DRAFT to EXPERIMENTAL for these revisions: Update profiles to remove SNIA_classes and use DMTF CIM_classes in these profiles: Common, SAS Target Port, SB Target Ports, FC-SB-x Initiator Ports, Generic Initiator Ports, iSCSI Initiator Ports, FC Initiator Ports, SAS Initiator Ports, ATA Initiator Ports, SB Initiator Ports, FCoE Initiator Ports, Cascading, Server Profile, Experimental Indications, Proxy Server System Management, Operational Power, Indications.
- ATA Initiator Ports
 - Deprecated this experimental profile (TSG-SMIS-SCR00318).
- Backend Ports
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).
- Base Server Profile
 - Changed references from DSP1011 version 1.0.1 to DSP1011 version 1.0.2.
 - Made the DMTF Computer System Profile Mandatory, since Base Server specializes the Computer.
- System profile
 - Fixed the reference to the Record Log profile.
 - Fixed the version numbers on the Related Profiles to match what the profiles claim,
 - Added the specialization information.
 - Fixed the Descriptions to the References in CIM_ComputerSystemPackage.
- Cluster Profile
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).
- Cascading Profile
 - Deleted the text of this profile (was deprecated) and added a reference to the last (non-deprecated) version of this profile, in SMI-S Version 1.4.0 Revision 6.
- DA Target Ports Profile
 - Added the specialization information.
 - Made PortType Mandatory, since it is Mandatory in Generic Target Ports.
- Direct Attach (DA) Ports Profile
 - Promoted to Stable (TSG-SMIS-SCR00318).
- Extra Capacity Set
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).

- Fan Profile
 - Added the specialization information.
- FC Initiator Ports Profile
 - Promoted to Stable (TSG-SMIS-SCR00318).
 - Added back in the specialization notations.
 - Redefined CIM_FCPortStatistics to be a specialization of CIM_StatisticalData.
- FC Target Ports Profile
 - SMI Referenced Properties/Methods for CIM_FCPort Table, Row for NetworkAddresses (added): text changed to “8 unseparated upper case hex digits”.
 - Added back in the specialization notations, including the fact that the profile specializes the Generic Target Ports Profile.
- FCoE Initiator Ports Profile
 - Added back in the specialization notations.
 - Redefined CIM_FCPortStatistics to be a specialization of CIM_StatisticalData.
- FCoE Target Ports Profile
 - Moved within Part 3 to follow FC Target Ports Profile (CORE-SMIS-SCR-00084).
 - Text tweaked for FCoE, including test and figure referencing ProtocolControllerForPort (CORE-SMISCR-00084).
 - Added back in the specialization notations, including the fact that the profile specializes the Generic Target Ports Profile.
 - Removed the CIM_LogicalPort, since the CIM_FCPort specializes it.
- Generic Initiator Ports
 - Promoted to Stable (TSG-SMIS-SCR00318).
 - Changed CIM_LogicalPortStatistics to CIM_StatisticalData to resolve specialization issues.
- Health Package
 - Promoted sections 25.1.8 (RECE) and 25.1.6 (TSG-SMIS-SCR00318).
- Indication Profile
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).
- Initiator Ports profile
 - Added back in properties that were dropped.
 - Change the name of the clause to match the name of the profile.
- iSCSI Initiator Port Profile
 - Promoted to Stable (TSG-SMIS-SCR00318).
 - Removed the statement that this profile specializes the Generic Initiator Ports Profile (it does not).

- iSCSI Target Ports Profile (SMIS-161-Errata-SCR00002)
 - Fixed typo: For CIM_ElementCapabilities, USAGE=CIM_iSCSICapabilities to System References.
 - Added the method CreateiSCSIProtocolEndpointUsingCS to CIM_iSCSIConfigurationService as optional.
 - Put in the existing methods of the service as Optional (since we never told anyone they were required).
 - Made CIM_SystemDevice (ComputerSystem to EthernetPort) conditional, since EthernetPort is Optional.
 - Fixed the reference descriptions in CIM_ConcreteDependency.
 - Fixed descriptions on the references in CIM_SAPAvailableForElement.
 - Changed the Central Class from EthernetPort to CIM_iSCSICapabilities (TSG-SMIS-SCR00333).
- Job Control Profile
 - Changed the Central Class from Service (e.g., StorageConfigurationService) to CIM_ConcreteJob (TSGSMIS-SCR00333).
- Location Profile
 - Added the Physical Package Related Profile to the spec.
- Media Access Device Profile
 - A CIM_ElementCapabilities was added to the Profile to link CIM_MediaAccessDevice to CIM_EnabledLogicalElementCapabilities.
 - Added the key property to CIM_EnabledLogicalElementCapabilities.
 - Made the DMTF Indications Profile optional, since both indications in the profile are optional.
- Miscellaneous Security Profiles
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).
- MultiSystem Profile
 - SMI Referenced Properties/Methods for CIM_RedundancySet table: RedundancyStatus row revised (SMIS-160-Errata-SCR00010).
 - Changed the Central Class from ComputerSystem to CIM_ComputerSystem (Non-Top-Level System).
 - Fixed the profile versions in the Related Profiles table (TSG-SMIS-SCR00333).
- Parallel SCSI (SPI) Target Ports Profile
 - Removed per von Behren SMI-S V1.7r3 comments 2 and 3.
- Physical Package Package
 - Changed the Central Class from PhysicalPackage to CIM_PhysicalPackage (System) (TSG-SMISSCR00333).
- Power Supply Profile
 - Promoted to Stable (TSG-SMIS-SCR00318).
 - Added the Failover method to CIM_RedundancySet.

- Profile Introduction
 - Removed the statement that Packages are not advertised in the CIM Server (SMIS-180-Errata-SCR00005).
- Profile Registration
 - Added clarifying statements on the direction of the CIM_ReferencedProfile association (SMIS-180-Errata-SCR00006).
 - Added back in the specialization notations.
 - Added the Scoping class to the SynopsisComments.
- Proxy Server System Management Profile
 - Added a reference to the last version of this profile in SMI-S Version 1.6.1 Revision 5.
- Recipe Overview
 - Removed this obsolete and deprecated profile (TSG-SMIS-SCR00318).
- References
 - Updated some references here and within profiles, removed others (irrelevant).
 - Added DMTF DSP1054 v1.2.2, Indications Profile (and changed version to 1.2.2 throughout book).
 - Removed DSP0004, DSP0200, DSP0202, DSP0207.
- SAS Initiator Ports Profile
 - Promoted to Stable (TSG-SMIS-SCR00318).
 - Added the specialization information.
 - Added a key to CIM_SASPhyStatistics.
 - Fixed the references in both CIM_ElementStatisticalData CIM Elements tables.
- SAS Target Ports Profile
 - Added back in the specialization notations, including the fact that the profile specializes the Generic Target Ports Profile.
- Serial Attached SCSI (SAS) Target Port Profile (LSI/NetApp and HP implementations)
 - Promoted to Stable (TSG-SMIS-SCR00318).
- SATA Target Port Profile
 - Deprecated this experimental profile (TSG-SMIS-SCR00318).
- SB Initiator Ports Profile
 - Added back in the specialization notations, including the fact that this profile specializes the Generic Initiator Ports Profile.
- SB Target Ports Profile
 - Added back in the specialization notations, including the fact that the profile specializes the Generic Target Ports Profile.

- Added back in properties that were dropped.
- Server Profile
 - Copied the 1.6.1 version of the profile into this clause and edited it as follows:
 - Created a Synopsis subclause and deleted the Supported Subprofiles and Packages, and the Registered Name and Version.
 - Deleted the Experimental Indications Profile from the Related Profiles table.
 - Replaced the Indications Supported Profile Group with the DMTF Indications Profile.
 - Deleted the CIM_CIMXMLCommunicationMechanism (in favor of using the CIM_ObjectManagerCommunicationMechanism class).
 - Made CIM_ObjectManagerCommunicationMechanism Mandatory, since it now covers CIM-XML as well as WS-Man.
 - Deleted the deprecated WQL indication.
 - Removed deprecated properties from CIM_Namespace.
 - Changed the Scoping Class from System to ObjectManager (SMIS-180-Errata-SCR00004).
- Software Inventory Profile
 - Fixed the references on CIM_ElementSoftwareIdentity.
 - Added TargetOSTypes to CIM_SoftwareIdentity.
 - Added ResourceType to CIM_SoftwareIdentityResource.
- SPI Initiator Ports Profile
 - Deprecated this experimental profile (TSG-SMIS-SCR00318).
- SPI Target Ports Profile
 - Deprecated this experimental profile (TSG-SMIS-SCR00318).
 - Promoted to Stable (TSG-SMIS-SCR00318).
- Storage Enclosure Profile (TSG-SMIS-SCR00328)
 - Added “Specializes: DMTF Physical Asset Profile” to the Synopsis.
 - Fixed the version numbers on the Related Profiles to match what the profiles claim.
 - Changed references to “Base System” to be “Base Server”.
 - Included the classes inherited from the DMTF Physical Asset Profile.
- Annex A (informative) SMI-S Information Mode
 - Removed statement about SNIA_classes.
 - This standard is now based on DMTF’s CIM schema Version 2.51.
- Annex B Cross Profile Considerations
 - Added: content moved within Part 3 to Annex B. (CORE-SMIS-SCR-00084).

A list of all parts in the ISO/IEC 24775 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user’s national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

INTENDED AUDIENCE

This document is intended for use by individuals and companies engaged in developing, deploying, and promoting interoperable multi-vendor SANs through the Storage Networking Industry Association (SNIA) organization.

CHANGES TO THE SPECIFICATION

Each publication of this specification is uniquely identified by a three-level identifier, comprised of a version number, a release number and an update number. The current identifier for this specification is version 1.8.0. Future publications of this specification are subject to specific constraints on the scope of change that is permissible from one publication to the next and the degree of interoperability and backward compatibility that should be assumed between products designed to different publications of this standard. The SNIA has defined three levels of change to a specification:

- Major Revision: A major revision of the specification represents a substantial change to the underlying scope or architecture of the SMI-S API. A major revision results in an increase in the version number of the version identifier (e.g., from version 1.x.x to version 2.x.x). There is no assurance of interoperability or backward compatibility between releases with different version numbers.
- Minor Revision: A minor revision of the specification represents a technical change to existing content or an adjustment to the scope of the SMI-S API. A minor revision results in an increase in the release number of the specification's identifier (e.g., from x.1.x to x.2.x). Minor revisions with the same version number preserve interoperability and backward compatibility.
- Update: An update to the specification is limited to minor corrections or clarifications of existing specification content. An update will result in an increase in the third component of the release identifier (e.g., from x.x.1 to x.x.2). Updates with the same version and minor release levels preserve interoperability and backward compatibility.

TYPOGRAPHICAL CONVENTIONS

Maturity Level

In addition to informative and normative content, this specification includes guidance about the maturity of emerging material that has completed a rigorous design review but has limited implementation in commercial products. This material is clearly delineated as described in the following sections. The typographical convention is intended to provide a sense of the maturity of the affected material, without altering its normative content. By recognizing the relative maturity of different sections of the standard, an implementer should be able to make more informed decisions about the adoption and deployment of different portions of the standard in a commercial product.

This specification has been structured to convey both the formal requirements and assumptions of the SMI-S API and its emerging implementation and deployment lifecycle. Over time, the intent is that all content in the specification will represent a mature and stable design, be verified by extensive implementation experience, assure consistent support for backward compatibility, and rely solely on content material that has reached a similar level of maturity. Unless explicitly labeled with one of the subordinate maturity levels defined for this specification, content is assumed to satisfy these requirements and is referred to as "Finalized". Since much of the evolving specification

content in any given release will not have matured to that level, this specification defines three subordinate levels of implementation maturity that identify important aspects of the content's increasing maturity and stability. Each subordinate maturity level is defined by its level of implementation experience, its stability and its reliance on other emerging standards. Each subordinate maturity level is identified by a unique typographical tagging convention that clearly distinguishes content at one maturity model from content at another level.

Experimental Maturity Level

No material is included in this document unless its initial architecture has been completed and reviewed. Some content included in this document has complete and reviewed design, but lacks implementation experience and the maturity gained through implementation experience. This content is included in order to gain wider review and to gain implementation experience. This material is referred to as “Experimental”. It is presented here as an aid to implementers who are interested in likely future developments within the SMI specification. The contents of an Experimental profile may change as implementation experience is gained. There is a high likelihood that the changed content will be included in an upcoming revision of the specification. Experimental material can advance to a higher maturity level as soon as implementations are available. Figure 1 is a sample of the typographical convention for Experimental content.

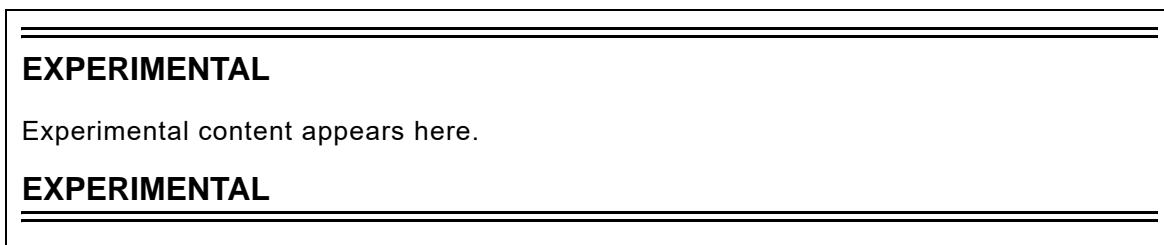


Figure 1 - Experimental Maturity Level Tag

Implemented Maturity Level

Profiles for which initial implementations have been completed are classified as “Implemented”. This indicates that at least two different vendors have implemented the profile, including at least one provider implementation. At this maturity level, the underlying architecture and modeling are stable, and changes in future revisions will be limited to the correction of deficiencies identified through additional implementation experience. Should the material become obsolete in the future, it must be deprecated in a minor revision of the specification prior to its removal from subsequent releases. Figure 2 is a sample of the typographical convention for Implemented content.

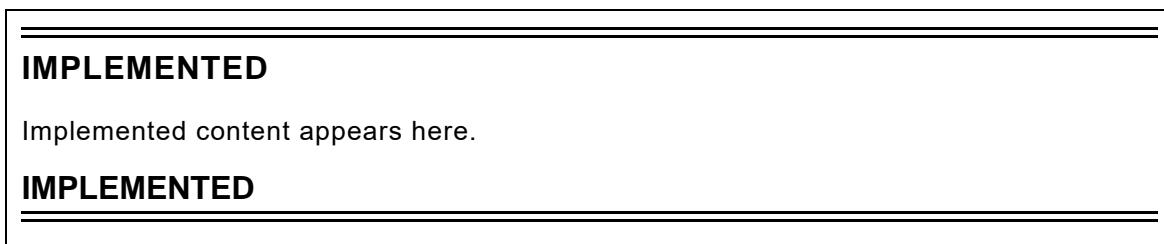


Figure 2 - Implemented Maturity Level Tag

Stable Maturity Level

Once content at the Implemented maturity level has garnered additional implementation experience, it can be tagged at the Stable maturity level. Material at this maturity level has been implemented by three different vendors, including both a provider and a client. Should material that has reached this maturity level become obsolete, it may only be deprecated as part of a minor revision to the specification. Material at this maturity level that has been deprecated may only be removed from the specification as part of a major revision. A profile that has reached this maturity level is guaranteed to preserve backward compatibility from one minor specification revision to the next. As a result, Profiles at or above the Stable

maturity level shall not rely on any content that is Experimental. Figure 3 is a sample of the typographical convention for Implemented content.

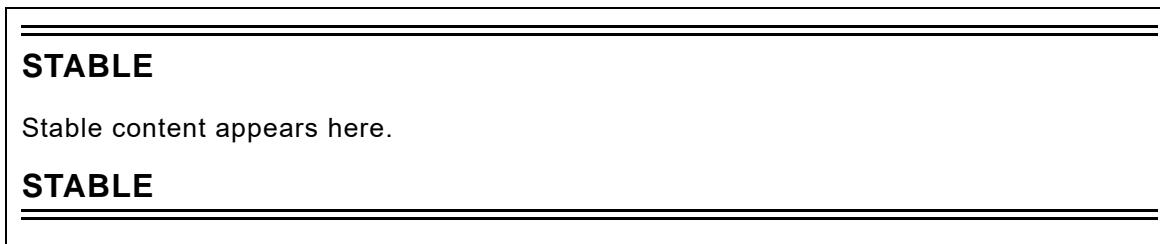


Figure 3 - Stable Maturity Level Tag

Finalized Maturity Level

Content that has reached the highest maturity level is referred to as “Finalized.” In addition to satisfying the requirements for the Stable maturity level, content at the Finalized maturity level must solely depend upon or refine material that has also reached the Finalized level. If specification content depends upon material that is not under the control of the SNIA, and therefore not subject to its maturity level definitions, then the external content is evaluated by the SNIA to assure that it has achieved a comparable level of completion, stability, and implementation experience. Should material that has reached this maturity level become obsolete, it may only be deprecated as part of a major revision to the specification. A profile that has reached this maturity level is guaranteed to preserve backward compatibility from one minor specification revision to the next. Over time, it is hoped that all specification content will attain this maturity level. Accordingly, there is no special typographical convention, as there is with the other, subordinate maturity levels. Unless content in the specification is marked with one of the typographical conventions defined for the subordinate maturity levels, it should be assumed to have reached the Finalized maturity level.

Deprecated Material

Non-Experimental material can be deprecated in a subsequent revision of the specification. Sections identified as “Deprecated” contain material that is obsolete and not recommended for use in new development efforts. Existing and new implementations may still use this material, but shall move to the newer approach as soon as possible. The maturity level of the material being deprecated determines how long it will continue to appear in the specification. Implemented content shall be retained at least until the next revision of the specialization, while Stable and Finalized material shall be retained until the next major revision of the specification. Providers shall implement the deprecated elements as long as it appears in the specification in order to achieve backward compatibility. Clients may rely on deprecated elements, but are encouraged to use non-deprecated alternatives when possible.

Deprecated sections are documented with a reference to the last published version to include the deprecated section as normative material and to the section in the current specification with the replacement. Figure 4 contains a sample of the typographical convention for deprecated content.



Figure 4 - Deprecated Tag

Contents

List of Figures	19
List of Tables	21
Foreword	31
1 Scope	33
2 Normative References	35
2.1 Approved References	35
2.2 DMTF References (Final).....	35
2.3 References under development.....	35
3 Terms and Definitions.....	37
3.1 General	37
3.2 Terms	37
4 Profile Introduction.....	39
4.1 Profile Overview	39
4.2 Terminology	40
4.3 Format for Profile Specifications	40
5 Generic Target Ports Profile	43
5.1 Synopsis.....	43
5.2 Description	43
5.3 Implementation.....	43
5.4 Methods of the Profile	46
5.5 Use Cases.....	46
5.6 CIM Elements.....	46
6 FC Target Ports Profile	49
6.1 Synopsis.....	49
6.2 Description	49
6.3 Implementation.....	50
6.4 Durable Names and Correlatable IDs of the Profile	50
6.5 Health and Fault Management.....	50
6.6 Supported Profiles and Packages.....	50
6.7 Extrinsic Methods of this Profile	50
6.8 Client Considerations and Recipes	51
6.9 CIM Elements.....	51
7 FCoE Target Ports Profile	55
7.1 Synopsis.....	55
7.2 Description	55
7.3 Implementation.....	56
7.4 Durable Names and Correlatable IDs of the Profile	56
7.5 Methods	57
7.6 Use Cases.....	57
7.7 CIM Elements.....	57
8 iSCSI Target Ports Profile	63
8.1 Synopsis.....	63
8.2 Description	63
8.3 Implementation.....	63
8.4 Health and Fault Management.....	67
8.5 Methods of this Profile.....	67
8.6 Client Considerations and Recipes	72

8.7	CIM Elements.....	72
9	Serial Attached SCSI (SAS) Target Ports Profile	95
9.1	Synopsis.....	95
9.2	Description	95
9.3	Health and Fault Management.....	96
9.4	Methods	96
9.5	Client Considerations and Recipes	96
9.6	CIM Elements.....	97
10	Serial ATA (SATA) Target Ports Profile	103
11	SB Target Ports Profile	105
11.1	Synopsis.....	105
11.2	Description	105
11.3	Implementation.....	105
11.4	Health and Fault Management Consideration.....	106
11.5	Cascading Considerations	107
11.6	Methods of the Profile	107
11.7	Client Considerations and Recipes	107
11.8	CIM Elements.....	107
12	Direct Attach (DA) Ports Profile	111
12.1	Synopsis.....	111
12.2	Description	111
12.3	Health and Fault Management.....	112
12.4	Extrinsic Methods	112
12.5	Use Cases.....	112
12.6	CIM Elements.....	113
13	Generic Initiator Ports Profile.....	117
13.1	Synopsis.....	117
13.2	Description	117
13.3	Implementation.....	117
13.4	Methods	122
13.5	Use Cases.....	123
13.6	CIM Elements.....	123
14	Parallel SCSI (SPI) Initiator Ports Profile	129
14.1	Synopsis	129
14.2	Description.....	129
14.3	Implementation	129
14.4	Methods	130
14.5	Use Cases and Recipes	130
14.6	CIM Elements	130
15	iSCSI Initiator Port Profile.....	137
15.1	Synopsis.....	137
15.2	Description	137
15.3	Implementation.....	137
15.4	Methods	139
15.5	Use Cases and Recipes	139
15.6	CIM Elements.....	139
16	FC Initiator Ports Profile	147
16.1	Synopsis.....	147
16.2	Description	147

16.3	Implementation.....	147
16.4	Methods	149
16.5	Use Cases and Recipes.....	149
16.6	CIM Elements.....	149
17	SAS Initiator Ports Profile	159
17.1	Synopsis.....	159
17.2	Description	159
17.3	Health and Fault Management Considerations.....	160
17.4	Methods of the profile.....	160
17.5	Client Considerations and Recipes	160
17.6	CIM Elements.....	160
18	ATA Initiator Ports Profile	171
19	SB Initiator Ports Profile	173
19.1	Synopsis.....	173
19.2	Description	173
19.3	Implementation.....	173
19.4	Methods	174
19.5	Client Considerations and Recipes	174
19.6	CIM Elements.....	175
20	FCoE Initiator Ports Profile	183
20.1	Synopsis.....	183
20.2	Description	183
20.3	Implementation.....	183
20.4	Methods	185
20.5	Use Cases and Recipes.....	186
20.6	CIM Elements.....	186
21	Access Points Profile.....	199
21.1	Synopsis.....	199
21.2	Description	199
21.3	Health and Fault Management Considerations	200
21.4	Cascading Considerations	200
21.5	Methods of this Profile.....	200
21.6	Client Considerations and Recipes	201
21.7	CIM Elements.....	201
22	Health Package	203
22.1	Synopsis.....	203
22.2	Description	203
22.3	Reporting.....	203
22.4	Health and Fault Management Considerations	207
22.5	Cascading Considerations	207
22.6	Use Cases.....	207
22.7	CIM Elements.....	208
23	Job Control Profile	211
23.1	Synopsis.....	211
23.2	Overview	211
23.3	Health and Fault Management	214
23.4	Cascading Considerations	215
23.5	Methods of the Profile	215
23.6	Client Considerations and Recipes	216

23.7	Registered Name and Version	217
23.8	CIM Elements.....	217
24	Location Profile.....	223
24.1	Synopsis.....	223
24.2	Description	223
24.3	Instance Diagram	223
24.4	Health and Fault Management Considerations.....	223
24.5	Cascading Considerations	224
24.6	Methods of the Profile	224
24.7	Use Cases.....	224
24.8	CIM Elements.....	224
25	Multiple Computer System Profile	227
25.1	Synopsis.....	227
25.2	Description	227
25.3	Health and Fault Management Considerations	231
25.4	Cascading Considerations	231
25.5	Methods of the Profile	231
25.6	Use Cases.....	232
25.7	CIM Elements.....	232
26	Physical Package Package	237
26.1	Synopsis.....	237
26.2	Description	237
26.3	Health and Fault Management Considerations	239
26.4	Cascading Considerations	239
26.5	Methods of this Profile.....	239
26.6	Use Cases.....	239
26.7	CIM Elements.....	240
27	Power Supply Profile	247
27.1	Synopsis.....	247
27.2	Description	247
27.3	Implementation.....	247
27.4	Methods	247
27.5	Use Cases.....	247
27.6	CIM Elements.....	248
28	Fan Profile	253
28.1	Synopsis.....	253
28.2	Description	253
28.3	Implementation.....	253
28.4	Methods	253
28.5	Use Cases.....	253
28.6	CIM Elements.....	254
29	Sensors Profile	261
29.1	Synopsis.....	261
29.2	Description	261
29.3	Implementation.....	261
29.4	Methods	261
29.5	Use Cases.....	261
29.6	CIM Elements.....	262
30	Base Server Profile.....	269

30.1	Synopsis.....	269
30.2	Description	270
30.3	Implementation.....	270
30.4	Methods	270
30.5	Use Cases.....	270
30.6	CIM Elements.....	271
31	Media Access Device Profile	277
31.1	Synopsis.....	277
31.2	Description	277
31.3	Implementation.....	278
31.4	Methods	279
31.5	Use Cases.....	279
31.6	CIM Elements.....	279
32	Storage Enclosure Profile.....	285
32.1	Synopsis.....	285
32.2	Description	285
32.3	Implementation.....	288
32.4	Methods	290
32.5	Use Cases.....	291
32.6	CIM Elements.....	291
33	Software Profile	305
33.1	Synopsis.....	305
33.2	Description	305
33.3	Health and Fault Management Considerations.....	306
33.4	Cascading Considerations.....	306
33.5	Methods of the Profile	306
33.6	Use Cases.....	306
33.7	CIM Elements.....	306
34	Software Inventory Profile	309
34.1	Synopsis.....	309
34.2	Description	309
34.3	Implementation.....	310
34.4	Methods	310
34.5	Use Cases.....	310
34.6	CIM Elements.....	310
35	Server Profile	317
35.1	Synopsis	317
35.2	Description	317
35.3	Health and Fault Management.....	320
35.4	Cascading Considerations	320
35.5	CIM Elements.....	320
36	Profile Registration Profile	325
36.1	Synopsis.....	325
36.2	Description	325
36.3	Implementation.....	325
36.4	Methods	328
36.5	Use Cases.....	328
36.6	CIM Elements.....	329
37	Indication Profile	335

38	Object Manager Adapter Profile	337
39	Proxy Server System Management Profile	339
40	Device Credentials Profile	341
40.1	Synopsis.....	341
40.2	Description	341
40.3	Health and Fault Management Considerations.....	342
40.4	Cascading Considerations	342
40.5	Extrinsic Methods of this Profile	342
40.6	Use Cases.....	342
40.7	CIM Elements.....	342
41	Operational Power Profile.....	345
41.1	Synopsis.....	345
41.2	Description	345
41.3	Implementation.....	345
41.4	Methods of the Profile	352
41.5	Use Cases.....	357
41.6	Client Considerations and Recipes	357
41.7	CIM Elements.....	357
42	Indications Profile	373
43	WBEM Server Profile.....	375
	Annex A (informative) SMI-S Information Model.....	377
	Annex B (informative) Cross Profile Considerations	379
B.1	Overview	379
B.2	HBA model	379
B.3	Switch Model.....	380
B.4	Array Model.....	380
B.5	Storage Virtualization Model	382
B.6	Fabric Topology (HBA, Switch, Array)	383

LIST OF FIGURES

Figure 1 - Experimental Maturity Level Tag	10
Figure 2 - Implemented Maturity Level Tag	10
Figure 3 - Stable Maturity Level Tag.....	11
Figure 4 - Deprecated Tag.....	11
Figure 5 - Generic Target Port Classes	43
Figure 6 - LogicalPort Class Hierarchy	44
Figure 7 - Generic Target with LUN Masking.....	45
Figure 8 - FC Target Port Instance Diagram.....	50
Figure 9 - FCoE Topology.....	55
Figure 10 - EthernetPort used for FCoE	56
Figure 11 - iSCSI Target Ports Profile Instance Diagram	65
Figure 12 - Serial Attached SCSI (SAS) Target Port Instance Diagram	95
Figure 13 - SB Target Port Instance Diagram.....	106
Figure 14 - DA Port Instance Diagram.....	112
Figure 15 - Generic Initiator Port Model.....	118
Figure 16 - Optional Connectivity Collection Model	118
Figure 17 - Optional Full-Path Model	119
Figure 18 - HBA and Disk Model	120
Figure 19 - HBA and Tape or Optical Devices.....	121
Figure 20 - Port Statistics.....	121
Figure 21 - Port Statistics Hierarchy	122
Figure 22 - SPI Initiator Port Instance Diagram	129
Figure 23 - iSCSI Initiator Port Instance Diagram.....	138
Figure 24 - Fibre Channel Initiator Instance Diagram	148
Figure 25 - FC Node Model	148
Figure 26 - SAS Initiator Port Model	159
Figure 27 - Fibre Channel Initiator Instance Diagram	173
Figure 28 - FCoE Initiator Instance Diagram	183
Figure 29 - Optional Target Element Model.....	184
Figure 30 - Logical Port Group Model.....	185
Figure 31 - System-wide Remote Access Point.....	199
Figure 32 - Access Point Instance Diagram.....	200
Figure 33 - Job Control Profile Model	211
Figure 34 - Storage Configuration.....	217
Figure 35 - Location Instance	223
Figure 36 - Two Redundant Systems Instance Diagram	227
Figure 37 - Multiple Redundancy Tier Instance Diagram.....	229
Figure 38 - System Level Numbers	230
Figure 39 - Physical Package Package Mandatory Classes.....	237
Figure 40 - Modeling for well defined subcomponents	238
Figure 41 - Physical Package Package with Optional Classes.....	239
Figure 42 - Media Access Device Class Diagram.....	278
Figure 43 - Enclosure with Two Arrays	287
Figure 44 - Model for Disk in Enclosure.....	290

Figure 45 - Software Instance Diagram	305
Figure 46 - Server Model	318
Figure 47 - Associations between RegisteredProfile instances	326
Figure 48 - Model for SMI-S Registered Profile	327
Figure 49 - Model for Provider Versions	328
Figure 50 - DeviceCredentials Profile Model.....	341
Figure 51 - Operational Power Profile Summary	346
Figure 52 - Model for Element Types.....	347
Figure 53 - Classes related to Top-level System Power Statistics.....	348

LIST OF TABLES

Table 1 - Profile Components	41
Table 2 - Modeling of Common Storage Devices in CIM.....	45
Table 3 - CIM Elements for Generic Target Ports	46
Table 4 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation.....	47
Table 5 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	47
Table 6 - SMI Referenced Properties/Methods for CIM_LogicalPort.....	47
Table 7 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint	48
Table 8 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	48
Table 9 - Related Profiles for FC Target Ports	49
Table 10 - FCPort OperationalStatus	50
Table 11 - CIM Elements for FC Target Ports	51
Table 12 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation.....	52
Table 13 - SMI Referenced Properties/Methods for CIM_FCPort	52
Table 14 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	53
Table 15 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint.....	53
Table 16 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	54
Table 17 - Related Profiles for FCoE Target Ports	55
Table 18 - FCPort OperationalStatus	56
Table 19 - CIM Elements for FCoE Target Ports.....	57
Table 20 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation.....	58
Table 21 - SMI Referenced Properties/Methods for CIM_EthernetPort	58
Table 22 - SMI Referenced Properties/Methods for CIM_FCPort	59
Table 23 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	60
Table 24 - SMI Referenced Properties/Methods for CIM_HostedDependency (NetworkPort to FCPort)	60
Table 25 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint.....	60
Table 26 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	61
Table 27 - iSCSI Terminology and SMI-S Class Names	63
Table 28 - EthernetPort OperationalStatus.....	67
Table 29 - CIM Elements for iSCSI Target Ports.....	72
Table 30 - SMI Referenced Properties/Methods for CIM_BindsTo (TCPProtocolEndpoint to IPProtocolEnd-point)75	
Table 31 - SMI Referenced Properties/Methods for CIM_BindsTo (iSCSIProtocolEndpoint to TCPProtocol-IEndpoint)75	
Table 32 - SMI Referenced Properties/Methods for CIM_ConcreteDependency	75
Table 33 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation (EthernetPort to IPProtocolEndpoint)76	
Table 34 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation (EthernetPort to iSCSIProtocolEndpoint)76	
Table 35 - SMI Referenced Properties/Methods for CIM_ElementCapabilities (CIM_iSCSICapabilities to ComputerSystem)76	
Table 36 - SMI Referenced Properties/Methods for CIM_ElementCapabilities (iSCSIConfigurationCapabili-ties to iSCSIConfigurationService)77	
Table 37 - SMI Referenced Properties/Methods for CIM_ElementSettingData (iSCSIConnectionSettings to TCPProtocolEndpoint)77	
Table 38 - SMI Referenced Properties/Methods for CIM_ElementSettingData (iSCSIConnectionSettings to iSCSIProtocolEndpoint)77	
Table 39 - SMI Referenced Properties/Methods for CIM_ElementSettingData (iSCSISessionSettings to SC-SIProtocolController)78	
Table 40 - SMI Referenced Properties/Methods for CIM_ElementSettingData (iSCSISessionSettings to	

ComputerSystem)78	
Table 41 - SMI Referenced Properties/Methods for CIM_ElementSettingData (iSCSISessionSettings to iSCSIProtocolEndpoint)78	
Table 42 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (iSCSILoginStatistics to SCSIProtocolController)79	
Table 43 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (iSCSISessionFailures to SCSIProtocolController)79	
Table 44 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (iSCSISessionStatistics to iSCSISession)79	
Table 45 - SMI Referenced Properties/Methods for CIM_EndpointOfNetworkPipe (iSCSIConnection to TCPProtocolEndpoint)80	
Table 46 - SMI Referenced Properties/Methods for CIM_EndpointOfNetworkPipe (iSCSISession to iSCSIProtocolEndpoint)80	
Table 47 - SMI Referenced Properties/Methods for CIM_EthernetPort	80
Table 48 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to IPProtocolEndpoint)81	
Table 49 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to TCPProtocolEndpoint)81	
Table 50 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to iSCSIProtocolEndpoint)82	
Table 51 - SMI Referenced Properties/Methods for CIM_HostedCollection	82
Table 52 - SMI Referenced Properties/Methods for CIM_HostedService	82
Table 53 - SMI Referenced Properties/Methods for CIM_IPProtocolEndpoint.....	83
Table 54 - SMI Referenced Properties/Methods for CIM_iSCSICapabilities.....	83
Table 55 - SMI Referenced Properties/Methods for CIM_iSCSIConfigurationCapabilities	84
Table 56 - SMI Referenced Properties/Methods for CIM_iSCSIConfigurationService	84
Table 57 - SMI Referenced Properties/Methods for CIM_iSCSIConnection	85
Table 58 - SMI Referenced Properties/Methods for CIM_iSCSIConnectionSettings	85
Table 59 - SMI Referenced Properties/Methods for CIM_iSCSILoginStatistics	86
Table 60 - SMI Referenced Properties/Methods for CIM_iSCSIProtocolEndpoint	87
Table 61 - SMI Referenced Properties/Methods for CIM_iSCSISession.....	88
Table 62 - SMI Referenced Properties/Methods for CIM_iSCSISessionFailures.....	88
Table 63 - SMI Referenced Properties/Methods for CIM_iSCSISessionSettings.....	89
Table 64 - SMI Referenced Properties/Methods for CIM_iSCSISessionStatistics	90
Table 65 - SMI Referenced Properties/Methods for CIM_MemberOfCollection	90
Table 66 - SMI Referenced Properties/Methods for CIM_NetworkPipeComposition	90
Table 67 - SMI Referenced Properties/Methods for CIM_SAPAvailableForElement	91
Table 68 - SMI Referenced Properties/Methods for CIM_SCSIProtocolController	91
Table 69 - SMI Referenced Properties/Methods for CIM_SystemDevice (ComputerSystem to EthernetPort)	92
Table 70 - SMI Referenced Properties/Methods for CIM_SystemDevice (ComputerSystem to SCSIProtocolController)92	
Table 71 - SMI Referenced Properties/Methods for CIM_SystemSpecificCollection	92
Table 72 - SMI Referenced Properties/Methods for CIM_TCPIPProtocolEndpoint	93
Table 73 - Related Profiles for SAS Target Ports	95
Table 74 - SASPort OperationalStatus	96
Table 75 - CIM Elements for SAS Target Ports.....	97
Table 76 - SMI Referenced Properties/Methods for CIM_ConcreteComponent	97
Table 77 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation.....	98
Table 78 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	98
Table 79 - SMI Referenced Properties/Methods for CIM_SASPort.....	99
Table 80 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint.....	99

Table 81 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	100
Table 82 - SMI Referenced Properties/Methods for CIM_SystemDevice (SAS PHY).....	100
Table 83 - SMI Referenced Properties/Methods for CIM_SASPHY	101
Table 84 - Related Profiles for SB Target Ports	105
Table 85 - FCPort OperationalStatus	106
Table 86 - CIM Elements for SB Target Ports	107
Table 87 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	108
Table 88 - SMI Referenced Properties/Methods for CIM_FCPort	108
Table 89 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	109
Table 90 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	109
Table 91 - SMI Referenced Properties/Methods for CIM_SBProtocolEndpoint	110
Table 92 - CIM Elements for DA Target Ports	113
Table 93 - SMI Referenced Properties/Methods for CIM_DAPort	113
Table 94 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	114
Table 95 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	114
Table 96 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint.....	114
Table 97 - SMI Referenced Properties/Methods for CIM_SystemDevice (Port).....	115
Table 98 - Concrete Initiator Ports Profiles.....	117
Table 99 - CIM Elements for Generic Initiator Ports	123
Table 100 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection	124
Table 101 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	124
Table 102 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics)	124
Table 103 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator)	125
Table 104 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target).....	125
Table 105 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection).....	125
Table 106 - SMI Referenced Properties/Methods for CIM_LogicalPort.....	126
Table 107 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection)	126
Table 108 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint (Initiator)	127
Table 109 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint (Target).....	127
Table 110 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports)	128
Table 111 - SMI Referenced Properties/Methods for CIM_StatisticalData.....	128
Table 112 - SPIPort OperationalStatus.....	129
Table 113 - CIM Elements for SPI Initiator Ports	130
Table 114 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection	131
Table 115 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	132
Table 116 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics)	132
Table 117 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator)	132
Table 118 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target).....	133
Table 119 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection).....	133
Table 120 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection)	133
Table 121 - SMI Referenced Properties/Methods for CIM_SCSIInitiatorTargetLogicalUnitPath	134
Table 122 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Initiator).....	134
Table 123 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Target)	135
Table 124 - SMI Referenced Properties/Methods for CIM_SPIPort	135
Table 125 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports)	136
Table 126 - SMI Referenced Properties/Methods for CIM_LogicalPortStatistics	136
Table 127 - Related Profiles for iSCSI Initiator Ports.....	137
Table 128 - EthernetPort OperationalStatus.....	138
Table 129 - CIM Elements for iSCSI Initiator Ports.....	139

Table 130 - SMI Referenced Properties/Methods for CIM_BindsTo (iSCSIProtocolEndpoint to TCPProtocolEndpoint) 140
Table 131 - SMI Referenced Properties/Methods for CIM_BindsTo(TCPProtocolEndpoint to IPProtocolEndpoint) 140
Table 132 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation (IPProtocolEndpoint to EthernetPort) 141
Table 133 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation (iSCSIProtocolEndpoint to EthernetPort) 141
Table 134 - SMI Referenced Properties/Methods for CIM_EthernetPort 141
Table 135 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to IPProtocolEndpoint) 142
Table 136 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to TCPProtocolEndpoint) 142
Table 137 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (ComputerSystem to iSCSIProtocolEndpoint) 143
Table 138 - SMI Referenced Properties/Methods for CIM_IPProtocolEndpoint 143
Table 139 - SMI Referenced Properties/Methods for CIM_iSCSIProtocolEndpoint 143
Table 140 - SMI Referenced Properties/Methods for CIM_SystemDevice (ComputerSystem to EthernetPort) 144
Table 141 - SMI Referenced Properties/Methods for CIM_TCPProtocolEndpoint 145
Table 142 - Related Profiles for FC Initiator Ports 147
Table 143 - FCPort OperationalStatus 149
Table 144 - CIM Elements for FC Initiator Ports 149
Table 145 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection 150
Table 146 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation 151
Table 147 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics) 151
Table 148 - SMI Referenced Properties/Methods for CIM_FCPort 152
Table 149 - SMI Referenced Properties/Methods for CIM_FCPortStatistics 153
Table 150 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator) 154
Table 151 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target) 154
Table 152 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection) 154
Table 153 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection) 155
Table 154 - SMI Referenced Properties/Methods for CIM_SCSIInitiatorTargetLogicalUnitPath 155
Table 155 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Initiator) 156
Table 156 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Target) 156
Table 157 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports) 157
Table 158 - SASPort OperationalStatus 160
Table 159 - CIM Elements for SAS Initiator Ports 160
Table 160 - SMI Referenced Properties/Methods for CIM_ATAProtocolEndpoint (Initiator) 161
Table 161 - SMI Referenced Properties/Methods for CIM_BindsTo 162
Table 162 - SMI Referenced Properties/Methods for CIM_ConcreteComponent 162
Table 163 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection 162
Table 164 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation 163
Table 165 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (PHY Statistics) 163
Table 166 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics) 163
Table 167 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator) 164
Table 168 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target) 164
Table 169 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection) 164
Table 170 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection) 165
Table 171 - SMI Referenced Properties/Methods for CIM_SASPort 165
Table 172 - SMI Referenced Properties/Methods for CIM_SCSIInitiatorTargetLogicalUnitPath 166

Table 173 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Initiator).....	166
Table 174 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Target)	167
Table 175 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator PHY)	167
Table 176 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports)	168
Table 177 - SMI Referenced Properties/Methods for CIM_LogicalPortStatistics	168
Table 178 - SMI Referenced Properties/Methods for CIM_SASPHY	169
Table 179 - SMI Referenced Properties/Methods for CIM_SASPhyStatistics	169
Table 180 - Related Profiles for SB Initiator Ports	173
Table 181 - FCPort OperationalStatus.....	174
Table 182 - CIM Elements for SB Initiator Ports	175
Table 183 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection	176
Table 184 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	176
Table 185 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics)	176
Table 186 - SMI Referenced Properties/Methods for CIM_FCPort	177
Table 187 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator)	178
Table 188 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target).....	178
Table 189 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection).....	178
Table 190 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection)	179
Table 191 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports)	179
Table 192 - SMI Referenced Properties/Methods for CIM_LogicalPortStatistics	180
Table 193 - SMI Referenced Properties/Methods for CIM_SBInitiatorTargetLogicalUnitPath.....	180
Table 194 - SMI Referenced Properties/Methods for CIM_SBProtocolEndpoint (Initiator)	181
Table 195 - SMI Referenced Properties/Methods for CIM_SBProtocolEndpoint (Target).....	181
Table 196 - FCPort OperationalStatus.....	185
Table 197 - CIM Elements for FCoE Initiator Ports.....	186
Table 198 - SMI Referenced Properties/Methods for CIM_ConnectivityCollection	187
Table 199 - SMI Referenced Properties/Methods for CIM_DeviceSAPIImplementation	188
Table 200 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Port Statistics)	188
Table 201 - SMI Referenced Properties/Methods for CIM_EthernetPort.....	188
Table 202 - SMI Referenced Properties/Methods for CIM_FCPort	189
Table 203 - SMI Referenced Properties/Methods for CIM_FCPortStatistics	190
Table 204 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Initiator)	191
Table 205 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint (Target).....	191
Table 206 - SMI Referenced Properties/Methods for CIM_HostedCollection (Connectivity Collection).....	192
Table 207 - SMI Referenced Properties/Methods for CIM_HostedCollection (FC Node).....	192
Table 208 - SMI Referenced Properties/Methods for CIM_HostedDependency (NetworkPort to FCPort).....	192
Table 209 - SMI Referenced Properties/Methods for CIM_LogicalPortGroup	193
Table 210 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Connectivity Collection)	193
Table 211 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (FC Node)	193
Table 212 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint (Initiator)	194
Table 213 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint (Target).....	194
Table 214 - SMI Referenced Properties/Methods for CIM_SCSIInitiatorTargetLogicalUnitPath	195
Table 215 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Initiator).....	195
Table 216 - SMI Referenced Properties/Methods for CIM_SCSIProtocolEndpoint (Target)	196
Table 217 - SMI Referenced Properties/Methods for CIM_SystemDevice (Ethernet Port)	196
Table 218 - SMI Referenced Properties/Methods for CIM_SystemDevice (Initiator Ports)	197
Table 219 - RemoteAccessPoint InfoFormat and AccessInfo Properties	200
Table 220 - CIM Elements for Access Points	201
Table 221 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint.....	201

Table 222 - SMI Referenced Properties/Methods for CIM_RemoteServiceAccessPoint	201
Table 223 - SMI Referenced Properties/Methods for CIM_SAPAvailableForElement	202
Table 224 - OperationalStatus Details	205
Table 225 - CIM Elements for Health.....	208
Table 226 - SMI Referenced Properties/Methods for CIM_ComputerSystem	208
Table 227 - SMI Referenced Properties/Methods for CIM_LogicalDevice	209
Table 228 - SMI Referenced Properties/Methods for CIM_RelatedElementCausingError	209
Table 229 - OperationalStatus to Job State Mapping	214
Table 230 - Standard Message for Job Control Profile.....	215
Table 231 - CIM Elements for Job Control.....	217
Table 232 - SMI Referenced Properties/Methods for CIM_AffectedJobElement.....	218
Table 233 - SMI Referenced Properties/Methods for CIM_AssociatedJobMethodResult	219
Table 234 - SMI Referenced Properties/Methods for CIM_ConcreteJob	219
Table 235 - SMI Referenced Properties/Methods for CIM_MethodResult.....	220
Table 236 - SMI Referenced Properties/Methods for CIM_OwningJobElement.....	221
Table 237 - Related Profiles for Location.....	223
Table 238 - CIM Elements for Location	224
Table 239 - SMI Referenced Properties/Methods for CIM_Location	224
Table 240 - SMI Referenced Properties/Methods for CIM_PhysicalElementLocation.....	225
Table 241 - Related Profiles for Multiple Computer System	227
Table 242 - Redundancy Type.....	228
Table 243 - CIM Elements for Multiple Computer System.....	232
Table 244 - SMI Referenced Properties/Methods for CIM_ComponentCS	233
Table 245 - SMI Referenced Properties/Methods for CIM_ComputerSystem (Non-Top-Level System).....	233
Table 246 - SMI Referenced Properties/Methods for CIM_ConcreteIdentity.....	233
Table 247 - SMI Referenced Properties/Methods for CIM_IsSpare	234
Table 248 - SMI Referenced Properties/Methods for CIM_MemberOfCollection	234
Table 249 - SMI Referenced Properties/Methods for CIM_RedundancySet	235
Table 250 - CIM Elements for Physical Package.....	240
Table 251 - SMI Referenced Properties/Methods for CIM_Container	241
Table 252 - SMI Referenced Properties/Methods for CIM_LogicalIdentity.....	241
Table 253 - SMI Referenced Properties/Methods for CIM_PhysicalElementLocation.....	241
Table 254 - SMI Referenced Properties/Methods for CIM_PhysicalPackage (Component)	242
Table 255 - SMI Referenced Properties/Methods for CIM_PhysicalPackage (System)	242
Table 256 - SMI Referenced Properties/Methods for CIM_Product (Component)	243
Table 257 - SMI Referenced Properties/Methods for CIM_Product (System)	243
Table 258 - SMI Referenced Properties/Methods for CIM_ProductParentChild.....	244
Table 259 - SMI Referenced Properties/Methods for CIM_ProductPhysicalComponent (Component)	244
Table 260 - SMI Referenced Properties/Methods for CIM_ProductPhysicalComponent (System).....	244
Table 261 - SMI Referenced Properties/Methods for CIM_SystemPackaging (Component)	245
Table 262 - SMI Referenced Properties/Methods for CIM_SystemPackaging (System).....	245
Table 263 - Related Profiles for Power Supply	247
Table 264 - CIM Elements for Power Supply	248
Table 265 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	249
Table 266 - SMI Referenced Properties/Methods for CIM_EnabledLogicalElementCapabilities	249
Table 267 - SMI Referenced Properties/Methods for CIM_IsSpare	249
Table 268 - SMI Referenced Properties/Methods for CIM_MemberOfCollection	250
Table 269 - SMI Referenced Properties/Methods for CIM_OwningCollectionElement.....	250
Table 270 - SMI Referenced Properties/Methods for CIM_PowerSupply.....	251

Table 271 - SMI Referenced Properties/Methods for CIM_RedundancySet	251
Table 272 - SMI Referenced Properties/Methods for CIM_SuppliesPower.....	252
Table 273 - SMI Referenced Properties/Methods for CIM_SystemDevice.....	252
Table 274 - Related Profiles for Fan.....	253
Table 275 - CIM Elements for Fan.....	254
Table 276 - SMI Referenced Properties/Methods for CIM_AssociatedCooling	255
Table 277 - SMI Referenced Properties/Methods for CIM_AssociatedSensor.....	255
Table 278 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	255
Table 279 - SMI Referenced Properties/Methods for CIM_EnabledLogicalElementCapabilities	256
Table 280 - SMI Referenced Properties/Methods for CIM_Fan.....	256
Table 281 - SMI Referenced Properties/Methods for CIM_HostedCollection.....	257
Table 282 - SMI Referenced Properties/Methods for CIM_IsSpare	257
Table 283 - SMI Referenced Properties/Methods for CIM_MemberOfCollection	258
Table 284 - SMI Referenced Properties/Methods for CIM_NumericSensor	258
Table 285 - SMI Referenced Properties/Methods for CIM_OwningCollectionElement.....	259
Table 286 - SMI Referenced Properties/Methods for CIM_RedundancySet (Fan Redundancy)	259
Table 287 - SMI Referenced Properties/Methods for CIM_Sensor	259
Table 288 - SMI Referenced Properties/Methods for CIM_SystemDevice.....	260
Table 289 - Related Profiles for Fan	261
Table 290 - CIM Elements for Sensors.....	262
Table 291 - SMI Referenced Properties/Methods for CIM_AssociatedSensor.....	263
Table 292 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	263
Table 293 - SMI Referenced Properties/Methods for CIM_EnabledLogicalElementCapabilities	263
Table 294 - SMI Referenced Properties/Methods for CIM_NumericSensor	264
Table 295 - SMI Referenced Properties/Methods for CIM_Sensor	266
Table 296 - SMI Referenced Properties/Methods for CIM_SystemDevice.....	267
Table 297 - Related Profiles for Base Server	269
Table 298 - CIM Elements for Base Server	271
Table 299 - SMI Referenced Properties/Methods for CIM_ComputerSystem	271
Table 300 - SMI Referenced Properties/Methods for CIM_ComputerSystemPackage	272
Table 301 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	272
Table 302 - SMI Referenced Properties/Methods for CIM_EnabledLogicalElementCapabilities	273
Table 303 - SMI Referenced Properties/Methods for CIM_HostedService	273
Table 304 - SMI Referenced Properties/Methods for CIM_PhysicalPackage	273
Table 305 - SMI Referenced Properties/Methods for CIM_ServiceAffectsElement.....	274
Table 306 - SMI Referenced Properties/Methods for CIM_TimeService	275
Table 307 - Related Profiles for Media Access Device	277
Table 308 - OperationalStatus For MediaAccessDevice	278
Table 309 - CIM Elements for Media Access Device.....	279
Table 310 - SMI Referenced Properties/Methods for CIM_EnabledLogicalElementCapabilities	280
Table 311 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint.....	280
Table 312 - SMI Referenced Properties/Methods for CIM_MediaAccessDevice	281
Table 313 - SMI Referenced Properties/Methods for CIM_PhysicalPackage	281
Table 314 - SMI Referenced Properties/Methods for CIM_ProtocolEndpoint	282
Table 315 - SMI Referenced Properties/Methods for CIM_Realizes	282
Table 316 - SMI Referenced Properties/Methods for CIM_SAPAvailableForElement	283
Table 317 - SMI Referenced Properties/Methods for CIM_SystemDevice	283
Table 318 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	283
Table 319 - Related Profiles for Storage Enclosure.....	285

Table 320 - CIM Elements for Storage Enclosure	291
Table 321 - SMI Referenced Properties/Methods for CIM_Card	292
Table 322 - SMI Referenced Properties/Methods for CIM_Chassis	293
Table 323 - SMI Referenced Properties/Methods for CIM_Chip	294
Table 324 - SMI Referenced Properties/Methods for CIM_ComputerSystemPackage	294
Table 325 - SMI Referenced Properties/Methods for CIM_ConfigurationCapacity	295
Table 326 - SMI Referenced Properties/Methods for CIM_ConfigurationReportingService	295
Table 327 - SMI Referenced Properties/Methods for CIM_ConnectedTo	296
Table 328 - SMI Referenced Properties/Methods for CIM_Container	296
Table 329 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	297
Table 330 - SMI Referenced Properties/Methods for CIM_ElementCapacity	297
Table 331 - SMI Referenced Properties/Methods for CIM_HostedService	297
Table 332 - SMI Referenced Properties/Methods for CIM_PackageInConnector	298
Table 333 - SMI Referenced Properties/Methods for CIM_PhysicalAssetCapabilities	298
Table 334 - SMI Referenced Properties/Methods for CIM_PhysicalComponent	299
Table 335 - SMI Referenced Properties/Methods for CIM_PhysicalConnector	299
Table 336 - SMI Referenced Properties/Methods for CIM_PhysicalFrame	300
Table 337 - SMI Referenced Properties/Methods for CIM_PhysicalMemory	301
Table 338 - SMI Referenced Properties/Methods for CIM_PhysicalPackage	301
Table 339 - SMI Referenced Properties/Methods for CIM_Rack	302
Table 340 - SMI Referenced Properties/Methods for CIM_Realizes	303
Table 341 - SMI Referenced Properties/Methods for CIM_Slot	303
Table 342 - SMI Referenced Properties/Methods for CIM_SystemPackaging	304
Table 343 - CIM Elements for Software	306
Table 344 - SMI Referenced Properties/Methods for CIM_InstalledSoftwareIdentity	306
Table 345 - SMI Referenced Properties/Methods for CIM_SoftwareIdentity	307
Table 346 - Related Profiles for Software Inventory	309
Table 347 - CIM Elements for Software Inventory	310
Table 348 - SMI Referenced Properties/Methods for CIM_ElementSoftwareIdentity	311
Table 349 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	312
Table 350 - SMI Referenced Properties/Methods for CIM_HostedCollection	312
Table 351 - SMI Referenced Properties/Methods for CIM_InstalledSoftwareIdentity	312
Table 352 - SMI Referenced Properties/Methods for CIM_MemberOfCollection	313
Table 353 - SMI Referenced Properties/Methods for CIM_OrderedComponent	313
Table 354 - SMI Referenced Properties/Methods for CIM_OrderedDependency	313
Table 355 - SMI Referenced Properties/Methods for CIM_SAPAvailableForElement	314
Table 356 - SMI Referenced Properties/Methods for CIM_SoftwareIdentity	314
Table 357 - SMI Referenced Properties/Methods for CIM_SoftwareIdentityResource	314
Table 358 - SMI Referenced Properties/Methods for CIM_SystemSpecificCollection	315
Table 359 - Related Profiles for Server	317
Table 360 - CIM Elements for Server	320
Table 361 - SMI Referenced Properties/Methods for CIM_CommMechanismForManager	321
Table 362 - SMI Referenced Properties/Methods for CIM_HostedAccessPoint	321
Table 363 - SMI Referenced Properties/Methods for CIM_HostedService	321
Table 364 - SMI Referenced Properties/Methods for CIM_Namespace	322
Table 365 - SMI Referenced Properties/Methods for CIM_NamespaceInManager	322
Table 366 - SMI Referenced Properties/Methods for CIM_ObjectManager	323
Table 367 - SMI Referenced Properties/Methods for CIM_ObjectManagerCommunicationMechanism	323
Table 368 - SMI Referenced Properties/Methods for CIM_System	324

Table 369 - CIM Elements for Profile Registration.....	329
Table 370 - SMI Referenced Properties/Methods for CIM_ElementConformsToProfile (Associates Domain object (e.g. System) to RegisteredProfile)330	
Table 371 - SMI Referenced Properties/Methods for CIM_ElementConformsToProfile (Associates RegisteredProfiles for SMI-S and domain profiles)331	
Table 372 - SMI Referenced Properties/Methods for CIM_ElementSoftwareIdentity (Profile and SW identity)..331	
Table 373 - SMI Referenced Properties/Methods for CIM_ElementSoftwareIdentity (Profile and SW identity)..331	
Table 374 - SMI Referenced Properties/Methods for CIM_Product	332
Table 375 - SMI Referenced Properties/Methods for CIM_ProductSoftwareComponent.....	332
Table 376 - SMI Referenced Properties/Methods for CIM_ReferencedProfile	332
Table 377 - SMI Referenced Properties/Methods for CIM_RegisteredProfile (Domain Registered Profile).....333	
Table 378 - SMI Referenced Properties/Methods for CIM_RegisteredProfile (The SMI-S Registered Profile) ..333	
Table 379 - SMI Referenced Properties/Methods for CIM_SoftwareIdentity	334
Table 380 - CIM Elements for Device Credentials.....	342
Table 381 - SMI Referenced Properties/Methods for CIM_HostedService	342
Table 382 - SMI Referenced Properties/Methods for CIM_SharedSecret.....	343
Table 383 - SMI Referenced Properties/Methods for CIM_SharedSecretIsShared	343
Table 384 - SMI Referenced Properties/Methods for CIM_SharedSecretService.....	344
Table 385 - Related Profiles for Operational Power	345
Table 386 - Creation, Deletion and Modification Methods	352
Table 387 - CIM Elements for Operational Power	357
Table 388 - SMI Referenced Properties/Methods for CIM_ElementCapabilities	359
Table 389 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Component System Stats) 360	
Table 390 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Top Level System Stats) ...360	
Table 391 - SMI Referenced Properties/Methods for CIM_ElementStatisticalData (Volume Stats).....361	
Table 392 - SMI Referenced Properties/Methods for CIM_HostedCollection (Client Defined).....361	
Table 393 - SMI Referenced Properties/Methods for CIM_HostedCollection (Default).....362	
Table 394 - SMI Referenced Properties/Methods for CIM_HostedCollection (Systemto StatisticsCollection)....362	
Table 395 - SMI Referenced Properties/Methods for CIM_HostedService	362
Table 396 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (DeviceSet)	363
Table 397 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Member of client defined collection)363	
Table 398 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Member of pre-defined collection)363	
Table 399 - SMI Referenced Properties/Methods for CIM_MemberOfCollection (Member of statistics collection)364	
Table 400 - SMI Referenced Properties/Methods for CIM_StatisticsCollection.....364	
Table 401 - SMI Referenced Properties/Methods for CIM_DeviceSet (Provider Defined)	365
Table 402 - SMI Referenced Properties/Methods for CIM_OperationalPowerManifest (Client Defined)	365
Table 403 - SMI Referenced Properties/Methods for CIM_OperationalPowerManifest (Provider Support).....366	
Table 404 - SMI Referenced Properties/Methods for CIM_OperationalPowerManifestCollection (Client Defined)367	
Table 405 - SMI Referenced Properties/Methods for CIM_OperationalPowerManifestCollection (Provider Defined)368	
Table 406 - SMI Referenced Properties/Methods for CIM_OperationalPowerStatisticalData	368
Table 407 - SMI Referenced Properties/Methods for CIM_OperationalPowerStatisticsCapabilities	369
Table 408 - SMI Referenced Properties/Methods for CIM_OperationalPowerStatisticsService.....371	

FOREWORD

The Storage Management Technical Specification is published in several parts. *Storage Management Technical Specification, Part 3 Common Profiles, 1.8.0 Rev 4* defines profiles that are used by profiles in other parts of this standard. In general, the common profiles do not fully define storage elements, but define non-storage management aspects that are common to storage domains. For example, the Access Points Profile defines a technique that the arrays, switches, or libraries may use to inform clients of non-CIM network interfaces that are available.

Some of the common profiles are based on DMTF profiles. For these profiles, the DMTF profile may be “specialized” to assure SNIA requirements are met.

Parts of this Standard

This standard is subdivided in the following parts:

- *Storage Management Technical Specification, Part 1 Overview, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 2 Common Architecture, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 3 Common Profiles, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 4 Block Devices, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 5 Filesystems, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 6 Fabric, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 7 Host Elements, 1.8.0 Rev 4*
- *Storage Management Technical Specification, Part 8 Media Libraries, 1.8.0 Rev 4*

SNIA Web Site

Current SNIA practice is to make updates and other information available through their web site at <http://www.snia.org>

SNIA Address

Requests for interpretation, suggestions for improvement and addenda, or defect reports are welcome. They should be sent via the SNIA Feedback Portal at <http://www.snia.org/feedback/> or by mail to the Storage Networking Industry Association, 4360 ArrowsWest Drive, Colorado Springs, Colorado 80907, U.S.A.

1 Scope

Storage Management Technical Specification, Part 3 Common Profiles, 1.8.0 Rev 4 defines profiles that are supported by profiles defined in the other parts of this standard. The first few clauses provide background material that helps explain the purpose and profiles. Common port profiles are grouped together since they serve as transport-specific variations of a common model. The port profiles are followed by other common profiles.

2 Normative References

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

2.1 Approved References

ISO/IEC 14776-413, SCSI Architecture Model - 3 (SAM-3) [ANSI INCITS 402-200x]

ISO/IEC 14776-452, SCSI Primary Commands - 3 (SPC-3) [ANSI INCITS.351-2005]

ANSI/INCITS 374:2003, Information technology - Fibre Channel Single - Byte Command Set-3 (FC-SB-3)

2.2 DMTF References (Final)

DMTF Final documents are accepted as standards.

DMTF DSP1001 Management Profile Specification Usage Guide 1.2.0

http://www.dmtf.org/sites/default/files/standards/documents/DSP1001_1.2.0.pdf

DMTF DSP1004 Base Server Profile 1.0.1

http://www.dmtf.org/sites/default/files/standards/documents/DSP1004_1.0.1.pdf

DMTF DSP1009 Sensors Profile, 1.1.1

http://www.dmtf.org/sites/default/files/standards/documents/DSP1009_1.1.1.pdf

DMTF DSP1011 Physical Asset Profile 1.0.2

http://www.dmtf.org/standards/published_documents/DSP1011_1.0.2.pdf

DMTF DSP1013, Fan Profile 1.0.1

http://www.dmtf.org/standards/published_documents/DSP1013_1.0.1.pdf

DMTF DSP1015 Power Supply Profile 1.1.0

http://www.dmtf.org/standards/published_documents/DSP1015_1.1.0.pdf

DMTF DSP1025 Software Update Profile 1.0.0

http://www.dmtf.org/standards/published_documents/DSP1025_1.0.0.pdf

DMTF DSP1033 Profile Registration Profile 1.1.0

http://www.dmtf.org/sites/default/files/standards/documents/DSP1033_1.1.0.pdf

DMTF DPS1052 Computer System Profile 1.0.3

http://www.dmtf.org/sites/default/files/standards/documents/DSP1052_1.0.3.pdf

DMTF DSP1054 Indications Profile 1.2.2

http://www.dmtf.org/sites/default/files/standards/documents/DSP1054_1.2.2.pdf

DMTF DSP1092:2013, WBEM Server Profile 1.0

http://www.dmtf.org/standards/published_documents/DSP1092_1.0.pdf

DMTF DSP1102 Launch in Context Profile 1.0.0

http://www.dmtf.org/sites/default/files/standards/documents/DSP1102_1.0.0_0.pdf

DMTF DSP1103 Job Control Profile v1.0.0

http://www.dmtf.org/sites/default/files/standards/documents/DSP1103_1.0.0_0.pdf

2.3 References under development

DMTF DSP1119, Diagnostics Job Control Profile v1.0.0b

http://www.dmtf.org/sites/default/files/standards/documents/DSP1119_1.0.0b.pdf

Storage Management Technical Specification, Part 2 Common Architecture, 1.8.0 Rev 4